


SPECTRUM

LIGHTING

IN

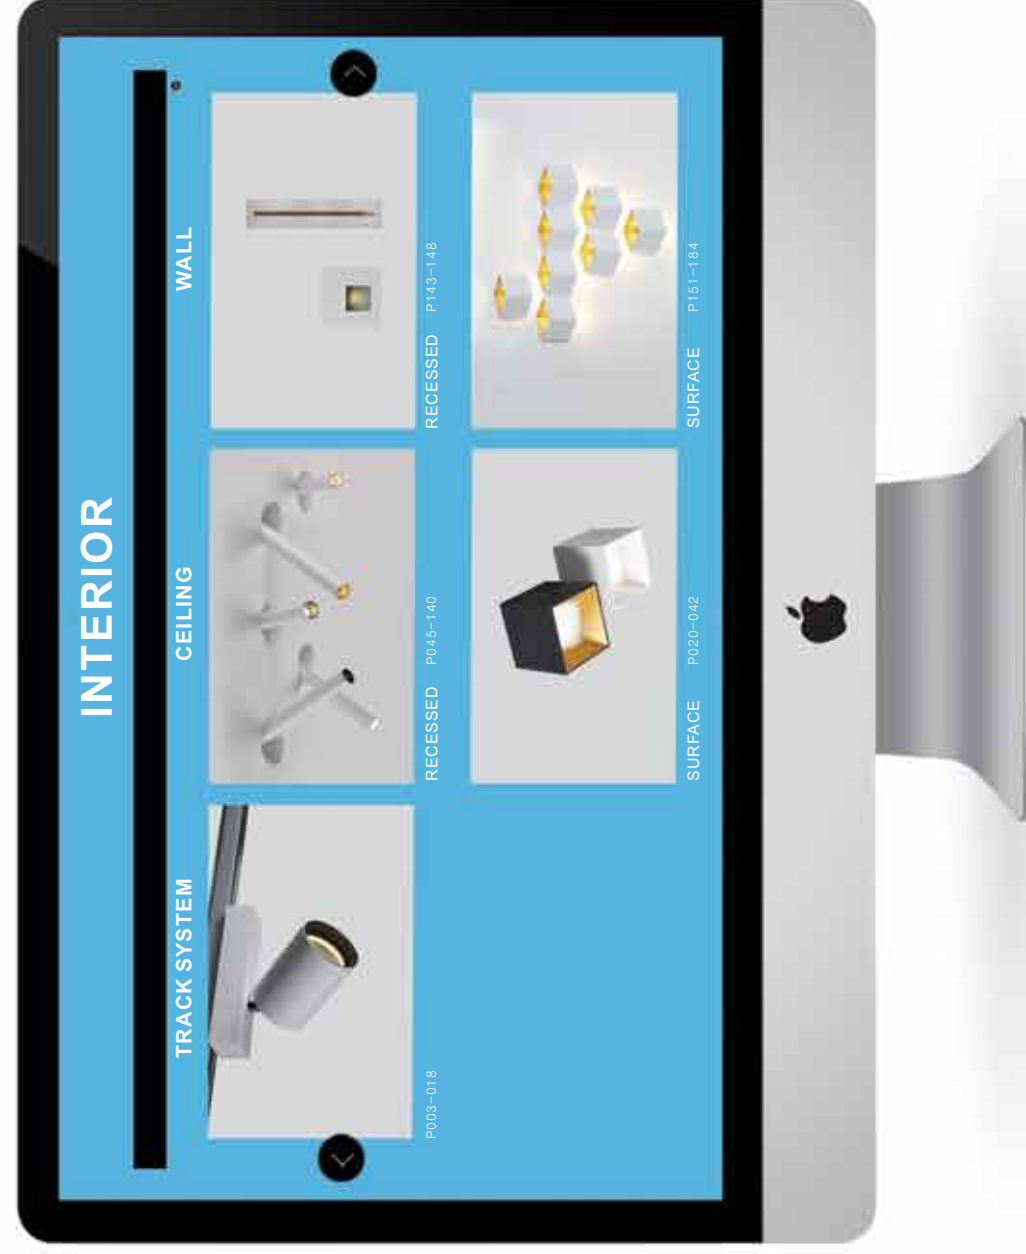

INTERIOR

TRACK SYSTEM



DANNY PLUS T P004



BOX P006



TWINS BOX P008



DANNY T P009



BROTHERS P012



UNIVERSAL T P015



JIM T P016



BROTHERS BOBO T P013



DOLPHIN P017



DANNY PLUS T




DANNY PLUS T-23W LED 1x23.4W



MATERIAL:ALU DIE-CAST+ALU
 ROTATES:350°
 SPOT HEAD ADJUST: 90°
 LAMP:BRIDGELUX V13 Array LED 1x23.4W
 2540lm/3000K/CRI 80 1969lm/3000K/CRI90
 INCL.LED POWER SUPPLY 700mA-DC
 AC 220-240V/50-60Hz
 REFLECTOR ANGLE: 16° 34° 50° .CRI 80/90

AVAILABLE COLOR:
 WHI/GLD
 WHI/BLK
 BLK/GLD
 SLV GRY/BLK
 IP20/ROHS/CE

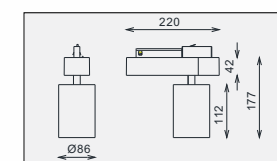


DANNY PLUS T LED 1x33.3W



MATERIAL:ALU DIE-CAST+ALU
 ROTATES:350°
 SPOT HEAD ADJUST: 90°
 LAMP:V15 Array 1x33.3W/900mA,
 3550lm/CRI80/3000K,2793lm/CRI90/3000K,
 INCL. LED POWER SUPPLY 900mA-DC
 AC 220-240V/50-60Hz
 REFLECTOR ANGLE:19°, 31°, 43°.CRI 80/90.

AVAILABLE COLOR:
 WHI/GLD
 WHI/BLK
 BLK/GLD
 SLV GRY/BLK
 IP20/ROHS/CE

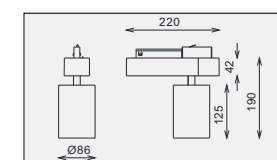




BOX-23W LED 1x23W

MATERIAL:ALUMINUM DIE-CAST
 ROTATES:350°
 SPOT HEAD ADJUST: 90°
 LAMP:BRIDGELUX VERO13 23.4W
 2540lm/3000K/CRI80 1969lm/3000K/CRI90
 INCL.LED POWER SUPPLY 700mA-DC
 AC 220-240V/50-60Hz
 REFLECTOR ANGLE:14°, 20°, 34°.CRI 80/90/97

AVAILABLE COLOR:
 Sand White/Black
 Sand Black
 Silver Grey/Black

IP20/ROHS/CE

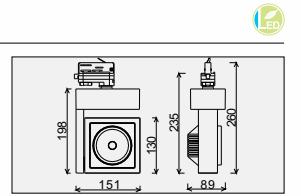


BOX-31W LED 1x31W

MATERIAL:ALUMINUM DIE-CAST
 ROTATES:350°
 SPOT HEAD ADJUST: 90°
 LAMP:BRIDGELUX VERO 18 ARRAY 1x31W
 3662lm/3000K/CRI80 2842lm/3000K/CRI90
 INCL.LED POWER SUPPLY 1050mA-DC
 AC 220-240V/50-60Hz
 REFLECTOR ANGLE:20°, 28°, 38°.CRI 80/90/97

AVAILABLE COLOR:
 Sand White/Black
 Sand Black
 Silver Grey/Black

IP20/ROHS/CE

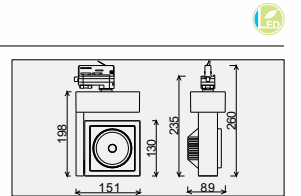


BOX-CDM-TC G8.5 1x70W

MATERIAL:ALUMINUM DIE-CAST
 ROTATES:355°
 SPOT HEAD ADJUST: 90°
 LAMP:1xCDM-TC MAX.70W
 REFLECTOR ANGLE:
 14°, 24°, 42°, 18x45°
 G8.5 INCL.BALLAST
 AC 220-240V/50-60Hz

AVAILABLE COLOR:
 Silver Grey, Sand Black, Sand White

IP20/ROHS/CE

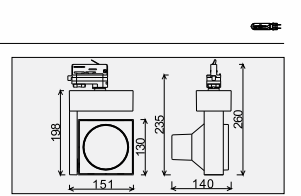



TWINS BOX




TWINS BOX-23W LED 1x23W

MATERIAL: ALUMINUM DIE-CAST
 ROTATES: 350°
 SPOT HEAD ADJUST: 90°

LAMP: BRIDGELUX VERO13 23.4W
 2540lm/3000K/CRI80 1969lm/3000K/CRI90
 INCL. LED POWER SUPPLY 700mA-DC
 AC 220-240V/50-60Hz
 REFLECTOR ANGLE: 14°, 20°, 34°. CRI 80/90/97

AVAILABLE COLOR:
 Sand White/Black
 Sand Black
 Silver Grey/Black

IP20/ROHS/CE

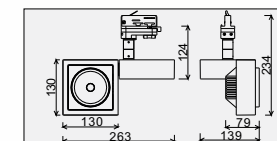


TWINS BOX-31W LED 1x31W

MATERIAL: ALUMINUM DIE-CAST
 ROTATES: 350°
 SPOT HEAD ADJUST: 90°

LAMP: BRIDGELUX VERO 18 ARRAY, 1x31W
 3662lm/3000K/CRI80 2842lm/3000K/CRI90
 INCL. LED POWER SUPPLY 1050mA-DC
 AC 220-240V/50-60Hz
 REFLECTOR ANGLE: 20°, 28°, 38°. CRI 80/90/97


AVAILABLE COLOR:
 Sand White/Black
 Sand Black
 Silver Grey/Black

IP20/ROHS/CE

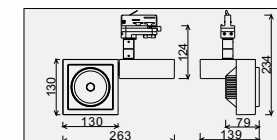




DANNY T

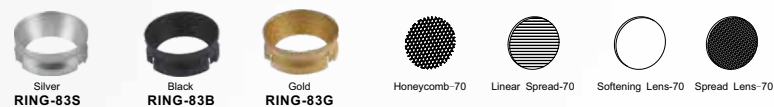

DANNY T LED 1x23W **DANNY T-33W** LED 1x33W **DANNY T-CDM-TC** G8.5 1x70W

MATERIAL:ALU DIE-CAST+ALU
ROTATES:350°
SPOT HEAD ADJUST: 90°


LAMP:BRIDGELUX V13 Array LED 1x23.4W
2540lm/3000K/CRI 80 1969lm/3000K/CRI90
INCL.LED POWER SUPPLY 700mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE: 16° 34° 50°.CRI 80/90

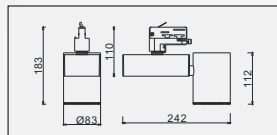

AVAILABLE COLOR:Sand White/Black, Sand Black, Silver Grey/Black
IP20/ROHS/CE


MATERIAL:ALU DIE-CAST+ALU
ROTATES:350°
SPOT HEAD ADJUST: 90°


LAMP:BRIDGELUX V15 Array 1x33.3W
3550lm/CRI80/3000K,2793lm/CRI90/3000K,
INCL.LED POWER SUPPLY 900mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE:19°, 31°, 43°.CRI 80/90.

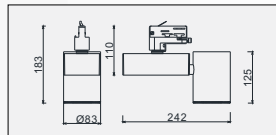

MATERIAL:ALU DIE-CAST+ALU
ROTATES:350°
SPOT HEAD ADJUST: 90°

LAMP:1xCDM-TC MAX.70W
REFLECTOR ANGLE:
10°, 26°, 40°, 32x55°
G8.5 INCL.BALLAST
AC 220-240V/50-60Hz

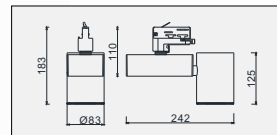

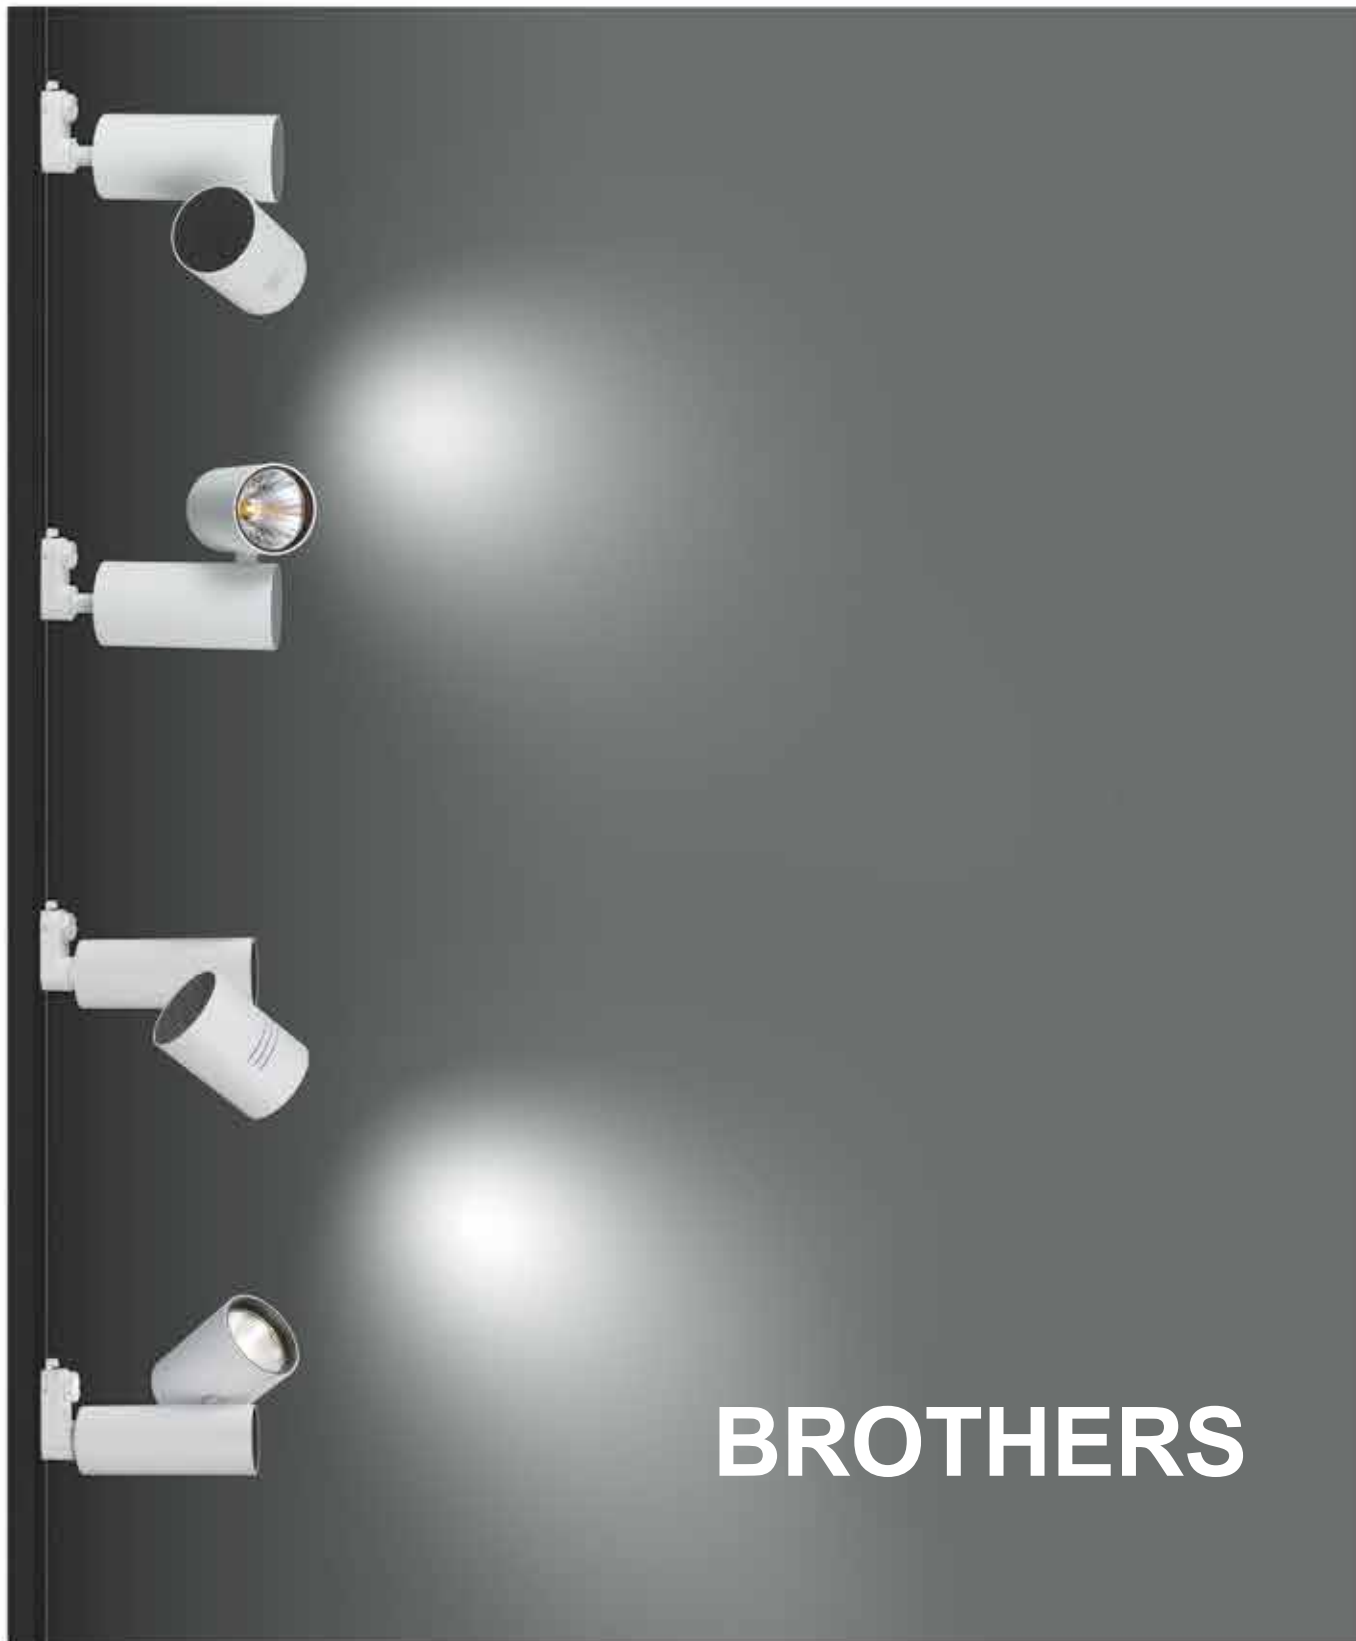

BROTHERS




BROTHERS-23W LED 1x23W

MATERIAL:ALUMINUM
ROTATES:350°
SPOT HEAD ADJUST: 90°

LAMP:BRIDGELUX V13 Array LED 1x23.4W
2540lm/3000K/CRI 80 1969lm/3000K/CRI90
INCL.LED POWER SUPPLY 700mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE: 16° 34° 50°.CRI 80/90

AVAILABLE COLOR:
WHI/GLD
WHI/BLK
BLK/GLD
SLV GRY/BLK

IP20/ROHS/CE

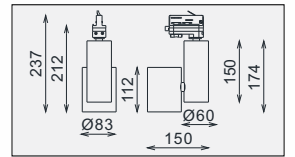


BROTHERS-33W LED 1x33W

MATERIAL:ALUMINUM
ROTATES:350°
SPOT HEAD ADJUST: 90°

LAMP:V15 Array 1x33.3W/900mA,
3550lm/CRI80/3000K,2793lm/CRI90/3000K,
INCL.LED POWER SUPPLY 900mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE:19°, 31°, 43°.CRI 80/90.

AVAILABLE COLOR:
WHI/GLD
WHI/BLK
BLK/GLD
SLV GRY/BLK

IP20/ROHS/CE

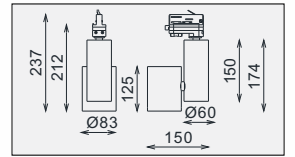



TWINS-CDM-TC G8.5 1x70W

MATERIAL:ALUMINUM
ROTATES:355°
SPOT HEAD ADJUST: 90°

LAMP:1xCDM-TC MAX.70W
REFLECTOR ANGLE:10°, 26°, 32°, 36°
G8.5 INCL.BALLAST
AC 220-240V/50-60Hz

AVAILABLE COLOR
Alu Grey
Sand Black
Sand White

IP20/ROHS/CE

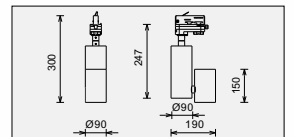




TWINS MINI H125 -9W LED 1x9W

MATERIAL:ALUMINUM DIE-CAST
ROTATES:350°
SPOT HEAD ADJUST: 90°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm/CRI80/3000K,739lm/CRI90/3000K,
INCL.LED POWER SUPPLY 500mA-DC
AC 220-240V/50-60Hz ⊕
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WHI/GLD
WHI/BLK
BLK/GLD
SLV GRY/BLK

IP20/ROHS/CE



TWINS MINI H125 -MR16 MR16 1x50W

MATERIAL:ALUMINUM DIE-CAST
ROTATES:350°
SPOT HEAD ADJUST: 90°

LAMP:1xMR16 MAX.50W
GU5.3/12V INCL.TRANSFO
AC 220-240V/50-60Hz ⊕

AVAILABLE COLOR:
WHI/GLD
WHI/BLK
BLK/GLD
SLV GRY/BLK

IP20/ROHS/CE


TWINS MINI H125-GU10 GU10 1x50W

MATERIAL:ALUMINUM DIE-CAST
ROTATES:350°
SPOT HEAD ADJUST: 90°

LAMP:1XGU10 MAX.50W
GU10 230-240V/50-60Hz ⊕

AVAILABLE COLOR:
WHI/GLD
WHI/BLK
BLK/GLD
SLV GRY/BLK

IP20/ROHS/CE




BROTHERS BOBO T-14W LED 1x14W


MATERIAL:ALUMINUM DIE-CAST
ROTATES:350°
SPOT HEAD ADJUST: 90°

LAMP:BRIDGELUX V10 ARRAY, 1x13.8W
1474lm/3000K/CRI80 1167lm/3000K/CRI90
INCL.LED POWER SUPPLY 500mA-DC
AC 220-240V/50-60Hz ⊕
REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE




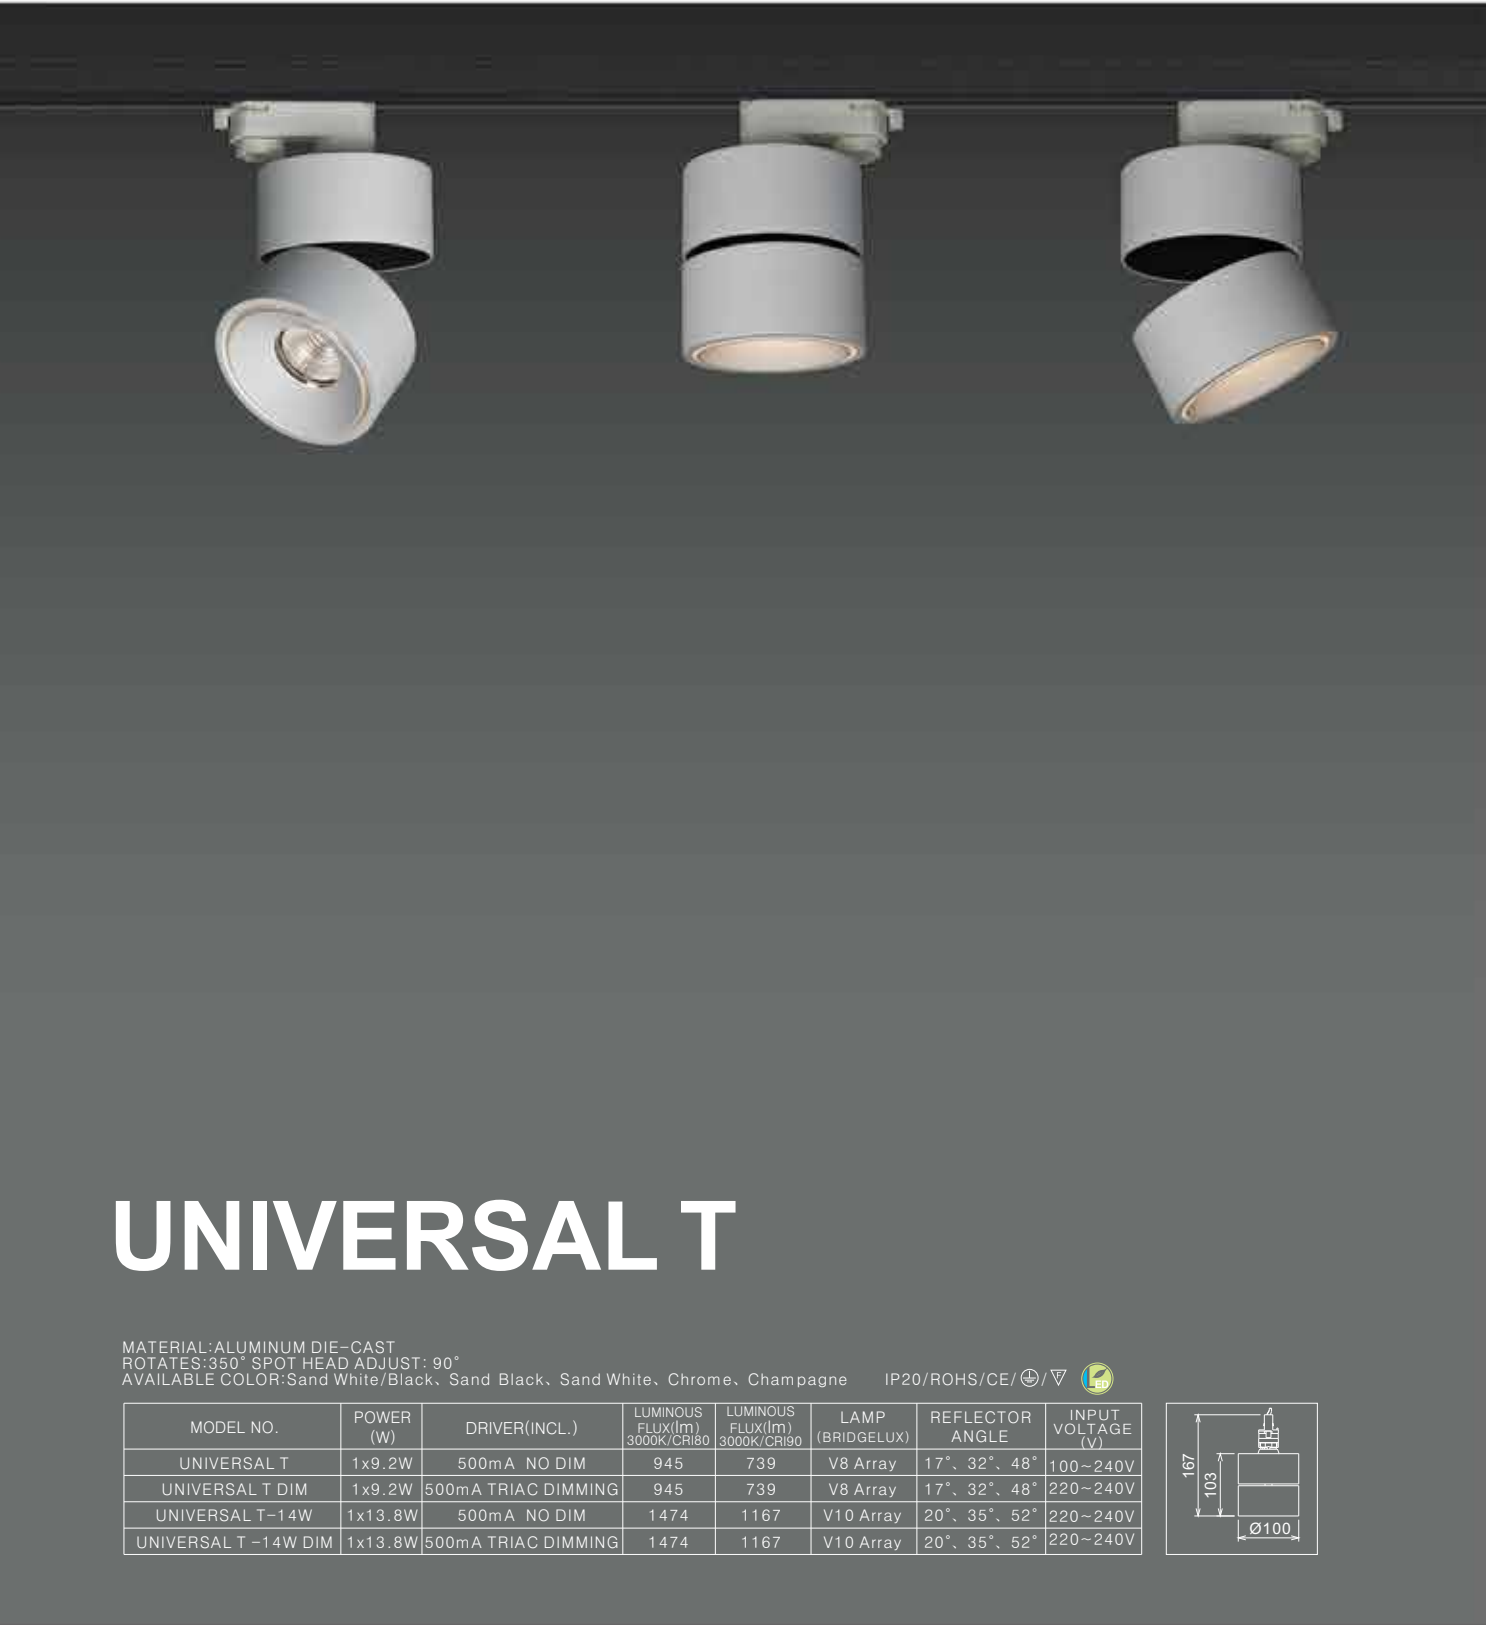

UNIVERSAL T

MATERIAL:ALUMINUM DIE-CAST
 ROTATES:350° SPOT HEAD ADJUST: 90°
 AVAILABLE COLOR:Sand White/Black, Sand Black, Sand White, Chrome, Champagne IP20/ROHS/CE/LED

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP (BRIDGELUX)	REFLECTOR ANGLE	INPUT VOLTAGE (V)
UNIVERSAL T	1x9.2W	500mA NO DIM	945	739	V8 Array	17°, 32°, 48°	100~240V
UNIVERSAL T DIM	1x9.2W	500mA TRIAC DIMMING	945	739	V8 Array	17°, 32°, 48°	220~240V
UNIVERSAL T-14W	1x13.8W	500mA NO DIM	1474	1167	V10 Array	20°, 35°, 52°	220~240V
UNIVERSAL T-14W DIM	1x13.8W	500mA TRIAC DIMMING	1474	1167	V10 Array	20°, 35°, 52°	220~240V



JIM T

JIM T-14W LED 1x14W


JIM T DIM-14W LED 1x14W

MATERIAL:ALUMINUM DIE-CAST
 ROTATES:350°
 SPOT HEAD ADJUST: 90°

LAMP:BRIDGELUX V10 ARRAY, 1x13.8W
 1474lm/3000K/CRI80 1167lm/3000K/CRI90
 INCL.LED POWER SUPPLY 500mA-DC
 AC 220-240V/50-60Hz LED
 REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90

LAMP:BRIDGELUX V10 ARRAY, 1x13.8W
 1474lm/3000K/CRI80 1167lm/3000K/CRI90
 INCL.LED POWER SUPPLY 500mA-DC TRIAC DIM
 AC 220-240V/50-60Hz LED
 REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90

AVAILABLE COLOR:Sand White, Sand Black IP20/ROHS/CE

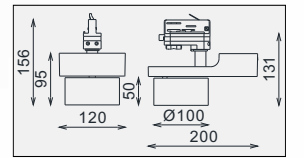



DOLPHIN




DOLPHIN M-16W LED 1x16W

MATERIAL:ALUMINUM
 ROTATES:355°
 SPOT HEAD ADJUST: 90°
 LAMP:BRIDGELUX VERO 13 1x16.2W
 1910lm/3000K/CRI 80 1480lm/3000K/CRI 90
 INCL.LED POWER SUPPLY 500mA-DC
 AC 220-240V/50-60Hz
 REFLECTOR ANGLE:25°, 34°, 46°.CRI 80/90.

AVAILABLE COLOR:
 Sand White/Black, Sand Black

IP20/ROHS/CE

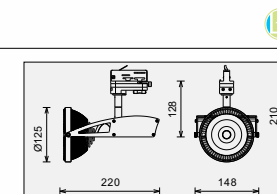


DOLPHIN M-24W LED 1x24W

MATERIAL:ALUMINUM
 ROTATES:355°
 SPOT HEAD ADJUST: 90°
 LAMP:BRIDGELUX VERO13 23.4W
 2540lm/3000K/CRI 80 1969lm/3000K/CRI90
 INCL.LED POWER SUPPLY 500mA-DC
 AC 220-240V/50-60Hz
 REFLECTOR ANGLE:25°, 34°, 46°.CRI 80/90.

AVAILABLE COLOR:
 Sand White/Black, Sand Black

IP20/ROHS/CE

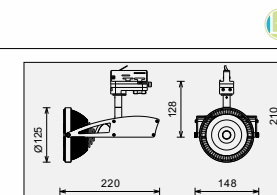


DOLPHIN-14W LED 1x14 W

MATERIAL:ALUMINUM
 ROTATES:355°
 SPOT HEAD ADJUST: 90°
 LAMP:BRIDGELUX V10 Array 1x13.8W
 1474lm/3000K/CRI 80 1167lm/3000K/CRI 90
 INCL.LED POWER SUPPLY 500mA-DC
 AC 220-240V/50-60Hz
 REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90.

AVAILABLE COLOR:
 Sand White/Black, Sand Black

IP20/ROHS/CE

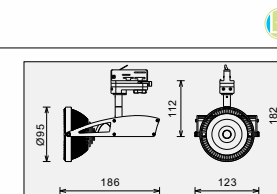

INTERIOR

CEILING SURFACE



SKY OK ED

SKY OK CD

MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:FIXED
AVAILABLE COLOR:WHI BLK GRY WHI/GLD BLK/GLD
IP44/ROHS/CE/♻️

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP (LUXEON)	INPUT VOLTAGE (V)	IP
SKY OK ED	1x9.6W	500mA NO DIM	1120	902	3030 2D	100~240V	44
SKY OK ED DIM	1x9.6W	500mA TRIAC DIMMING	1120	902	3030 2D	220~240V	40
SKY OK CD	1x9.6W	500mA NO DIM	1120	902	3030 2D	220~240V	44
SKY OK CD DIM	1x9.6W	500mA TRIAC DIMMING	1120	902	3030 2D	220~240V	40

PHILIPS LUMILEDS



COURSE

Course is a compact size and minimal exposed ceiling light, customers are able to purchase different front rings to combine into appearances of different styles. Meanwhile, Course series also provide accessories of IP65 for outdoor use, just need to change the accessories easily, the luminaire can become a high protection outdoor light!



COURSE RISE-6W LED 1x6W **COURSE RISE** LED 1x9W **COURSE RISE DIM** LED 1x9W

MATERIAL:ALU DIE-CAST

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/CRI80/3000K,550lm/CRI90/3000K, INCL. LED POWER SUPPLY 350mA-DC AC 100-240V/50-60Hz REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black

IP40/ROHS/CE/▽

MATERIAL:ALU DIE-CAST

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K,739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC AC 100-240V/50-60Hz REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black


IP40/ROHS/CE/▽

MATERIAL:ALU DIE-CAST

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K,739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC TRIAC DIM AC 220-240V/50-60Hz REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black

IP40/ROHS/CE/▽



COURSE -6W LED 1x6W **COURSE** LED 1x9W **COURSE DIM** LED 1x9W

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/CRI80/3000K,550lm/CRI90/3000K, INCL. LED SUPPLY 350mA-DC AC 100-240V/50-60Hz REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black

IP43/ROHS/CE/▽

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K,739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC AC 100-240V/50-60Hz REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black


IP43/ROHS/CE/▽

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K,739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC TRIAC DIM AC 220-240V/50-60Hz REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black

IP43/ROHS/CE/▽



COURSE OUT-6W LED 1x6W **COURSE OUT** LED 1x9W **COURSE OUT DIM** LED 1x9W

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/CRI80/3000K,550lm/CRI90/3000K, INCL. LED SUPPLY 350mA-DC AC 100-240V/50-60Hz REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black

IP65/ROHS/CE/▽

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K,739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC AC 100-240V/50-60Hz REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black


IP65/ROHS/CE/▽

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K,739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC TRIAC DIM AC 220-240V/50-60Hz REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black

IP65/ROHS/CE/▽



Front Ring for COURSE (IP43)

Front Ring for RISE

IP65 Front Ring & Wall Plate for COURSE

Lamp(IP40)



SAGITTARIUS



SAGITTARIUS LED 1x9W

MATERIAL:ALU DIE-CAST+ ALU
ADJUSTABLE ANGLE:0~90°/355°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm/CRI80/3000K, 739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White/Black
Sand Black
Sand Black/Gold

IP20/ROHS/CE/


SAGITTARIUS DIM LED 1x9W

MATERIAL:ALU DIE-CAST+ ALU
ADJUSTABLE ANGLE:0~90°/355°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm/CRI80/3000K, 739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
TRIAC DIM
AC 220-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White/Black
Sand Black
Sand Black/Gold

IP20/ROHS/CE/



SAGITTARIUS 2 LED 2x9W

MATERIAL:ALU DIE-CAST+ ALU
ADJUSTABLE ANGLE:0~90°/355°

LAMP:BRIDGELUX V8 ARRAY 2x9.2W/500mA,
2x945lm/CRI80/3000K, 2x739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White/Black
Sand Black
Sand Black/Gold

IP20/ROHS/CE/


SAGITTARIUS 2 DIM LED 2x9W

MATERIAL:ALU DIE-CAST+ ALU
ADJUSTABLE ANGLE:0~90°/355°

LAMP:BRIDGELUX V8 ARRAY 2x9.2W/500mA,
2x945lm/CRI80/3000K, 2x739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
TRIAC DIM
AC 220-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White/Black
Sand Black
Sand Black/Gold

IP20/ROHS/CE/



SAGITTARIUS 3 LED 3x9W

MATERIAL:ALU DIE-CAST+ ALU
ADJUSTABLE ANGLE:0~90°/355°

LAMP:BRIDGELUX V8 ARRAY 3x9.2W/500mA,
3x945lm/CRI80/3000K, 3x739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White/Black
Sand Black
Sand Black/Gold

IP20/ROHS/CE/


SAGITTARIUS 3 DIM LED 3x9W

MATERIAL:ALU DIE-CAST+ ALU
ADJUSTABLE ANGLE:0~90°/355°

LAMP:BRIDGELUX V8 ARRAY 3x9.2W/500mA,
3x945lm/CRI80/3000K, 3x739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
TRIAC DIM
AC 220-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White/Black
Sand Black
Sand Black/Gold

IP20/ROHS/CE/



SAGITTARIUS E2 LED 2x9W

MATERIAL:ALU DIE-CAST+ ALU
ADJUSTABLE ANGLE:0~90°/355°

LAMP:BRIDGELUX V8 ARRAY 2x9.2W/500mA,
2x945lm/CRI80/3000K, 2x739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White/Black
Sand Black
Sand Black/Gold

IP20/ROHS/CE/


SAGITTARIUS E2 DIM LED 2x9W

MATERIAL:ALU DIE-CAST+ ALU
ADJUSTABLE ANGLE:0~90°/355°

LAMP:BRIDGELUX V8 ARRAY 2x9.2W/500mA,
2x945lm/CRI80/3000K, 2x739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
TRIAC DIM
AC 220-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White/Black
Sand Black
Sand Black/Gold

IP20/ROHS/CE/



SAGITTARIUS E3 LED 3x9W

MATERIAL:ALU DIE-CAST+ ALU
ADJUSTABLE ANGLE:0~90°/355°

LAMP:BRIDGELUX V8 ARRAY 3x9.2W/500mA,
3x945lm/CRI80/3000K, 3x739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White/Black
Sand Black
Sand Black/Gold

IP20/ROHS/CE/


SAGITTARIUS E3 DIM LED 3x9W

MATERIAL:ALU DIE-CAST+ ALU
ADJUSTABLE ANGLE:0~90°/355°

LAMP:BRIDGELUX V8 ARRAY 3x9.2W/500mA,
3x945lm/CRI80/3000K, 3x739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
TRIAC DIM
AC 100-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White/Black
Sand Black
Sand Black/Gold

IP20/ROHS/CE/



CEILING SURFACE



CEILING SURFACE



ENERGY

ENERGY owns two strong advantages, efficient & economic.

Professional optic lens designed for mid-power SMD led of Lumileds company, provides a variety of lighting solutions for customers, there are Z30(30°), Z60(60°) and Z90(90°) lens for options which can be applied for vast lighting occasions, offers a uniform and low glare light distribution in advanced low bay environments with >90% efficiency.

While ZT25 (Asymmetric) lens is specially for industries halls or store environments which with products on shelves on both sides of the aisle. Provides uniform double sided oval beam with some intensity in the aisle center as well. (For specific assembly distance between lamps or photometric data pls feel free to consult us.)

ENERGY LED 1x35W



ENERGY DIM LED 1x35W

MATERIAL:ALU DIE-CAST

MATERIAL:ALU DIE-CAST

LAMP:LUXEON 3030 2D 33X1.07W, 500mA, 3700lm/3000K/CRI80, 4400lm/4000K/CRO80, 3920lm/5000.5700.6500K/CRI80, INCL. LED POWER SUPPLY 500mA-DC AC 220-240V/50-60Hz. Ⓢ

LAMP:LUXEON 3030 2D 33X1.07W, 500mA, 3700lm/3000K/CRI80, 4400lm/4000K/CRO80, 3920lm/5000.5700.6500K/CRI80, INCL. LED POWER SUPPLY 500mA-DC TRIAC DIM AC 220-240V/50-60Hz. Ⓢ LENS ANGLE:30°, 60°, 90°, ZT25(Asymmetric).



ZT25(Asymmetric)

AVAILABLE COLOR:Sand White, Sand Black, Sand Grey

IP20/ROHS/CE/ ▽



CEILING
SURFACE



MOON

PHILIPS
LUMILEDS

CEILING
SURFACE




MOON

MATERIAL: ALUMINUM+PMMA
ADJUSTABLE ANGLE: FIXED

LAMP: LUXEON 3020,
CRI80/CRI90, 3000K/4000K,
INCL. LED POWER SUPPLY
AC 100-240V/50-60Hz

AVAILABLE COLOR:
WHI
BLK

IP40/ROHS/CE/LED

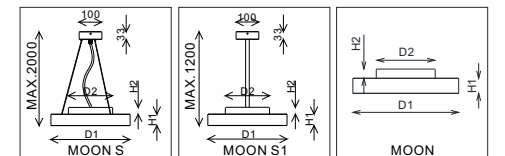

MODEL NO.	SIZE(mm)				POWER (W)	DRIVER(EXTERNAL)	LUMINOUS FLUX(lm)	
	D 1	D 2	H 1	H 2			3000K/CRI80	3000K/CRI90
MOON-6	160	124	42	21	11.5	NO DIM	1382	1210
MOON-6 DIM	160	124	42	21	11.5	TRIAC DIMMING	1382	1210
MOON-10	260	195	50	30	14.4	NO DIM	1728	1512
MOON-10 DIM	260	195	50	30	14.4	TRIAC DIMMING	1728	1512
MOON-15	350	195	50	30	23	NO DIM	2614	2287
MOON-15 DIM	350	195	50	30	23	TRIAC DIMMING	2614	2287
MOON-18	450	265	50	30	33.5	NO DIM	4039	3534
MOON-18 DIM	450	265	50	30	33.5	TRIAC DIMMING	4039	3534
MOON-18 1~10V	450	265	50	30	33.5	1~10V DIMMING	4039	3534
MOON-24	600	265	50	30	45.7	NO DIM	5508	4819
MOON-24 1~10V	600	265	50	30	45.7	1~10V DIMMING	5508	4819



EVA FIXED ED RECESSED

LED 1x14W




MATERIAL: ALUMINUM DIE-CAST
ADJUSTABLE ANGLE: FIXED

LAMP: BRIDGELUX V10 ARRAY
1x13.8W/500mA,
1474lm/CRI80/3000K, 1167lm/CRI90/3000K
EXCL. LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE: 35°, 50°. CRI 80/90

AVAILABLE COLOR:
WHI/BLK
BLK/GLD
WHI/GLD
WHI
BLK

IP20/ROHS/CE/

Ø82 H60



EVA FIXED ED

LED 1x9W




MATERIAL: ALUMINUM DIE-CAST
ADJUSTABLE ANGLE: FIXED

LAMP: BRIDGELUX V10 ARRAY 1x9.3W/350mA,
965lm/CRI80/3000K, 820lm/CRI90/3000K
INCL. LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz
REFLECTOR ANGLE: 35°, 50°. CRI 80/90

AVAILABLE COLOR:
WHI/BLK
BLK/GLD
WHI/GLD
WHI
BLK

IP20/ROHS/CE/



JIM




MATERIAL: ALU DIE-CAST+STEEL
ROTATES: 350°
SPOT HEAD ADJUST: 90°

AVAILABLE COLOR: Sand White, Sand Black, Champagne

IP20/ROHS/CE/



MODEL NO.	POWER (W)	DRIVER (INCL.)	LUMINOUS FLUX (lm) 3000K/CRI80	LUMINOUS FLUX (lm) 3000K/CRI90	LAMP (BRIDGELUX)	REFLECTOR ANGLE	INPUT VOLTAGE (V)
JIM-9W	1x9.2W	500mA NO DIM	945	739	V8 Array	17°, 32°, 48°	100~240V
JIM-9W DIM	1x9.2W	500mA TRIAC DIMMING	945	739	V8 Array	17°, 32°, 48°	220~240V
JIM-14W	1x13.8W	500mA NO DIM	1474	1167	V10 Array	20°, 35°, 52°	220~240V
JIM-14W DIM	1x13.8W	500mA TRIAC DIMMING	1474	1167	V10 Array	20°, 35°, 52°	220~240V







UNIVERSAL

Universal, it is one of the star products of NSL. It was born like an "all-rounder", owning a flexible lamp head of 350/90° rotation/adjustment, which gives it a multifunctional character can be used no matter on the ceiling or on the wall. Meanwhile, its unique appearance of decorative "HALO" also makes it very characteristic, and very attractive!

To perfect this series, now we have developed the new mini size, it has 6W-9W outputs for options, with a compact dimension of 75mm. Together with the original 9W-14W/100mm version, they have become a completed series of luminaire!

MATERIAL:ALU DIE-CAST+STEEL
 ROTATES:350° SPOT HEAD ADJUST: 90°
 AVAILABLE COLOR:Sand White/Black, Sand Black, Sand White, Chrome, Champagne IP20/ROHS/CE/☑/☑/☑

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP (BRIDGELUX)	REFLECTOR ANGLE	SIZE(mm) ØxH	INPUT VOLTAGE (V)
UNIVERSAL MINI	1x6.2W	350mA NO DIM	703	550	V8 Array	23°, 34°, 50°	75x91	100~240V
UNIVERSAL MINI-9W	1x9.2W	500mA NO DIM	945	739	V8 Array	23°, 34°, 50°	75x91	100~240V
UNIVERSAL MINI-9W DIM	1x9.2W	500mA TRIAC DIMMING	945	739	V8 Array	23°, 34°, 50°	75x91	220~240V
UNIVERSAL-9W	1x9.2W	500mA NO DIM	945	739	V8 Array	17°, 32°, 48°	100x103	100~240V
UNIVERSAL-9W DIM	1x9.2W	500mA TRIAC DIMMING	945	739	V8 Array	17°, 32°, 48°	100x103	220~240V
UNIVERSAL-14W	1x13.8W	500mA NO DIM	1474	1167	V10 Array	20°, 35°, 52°	100x103	220~240V
UNIVERSAL-14W DIM	1x13.8W	500mA TRIAC DIMMING	1474	1167	V10 Array	20°, 35°, 52°	100x103	220~240V

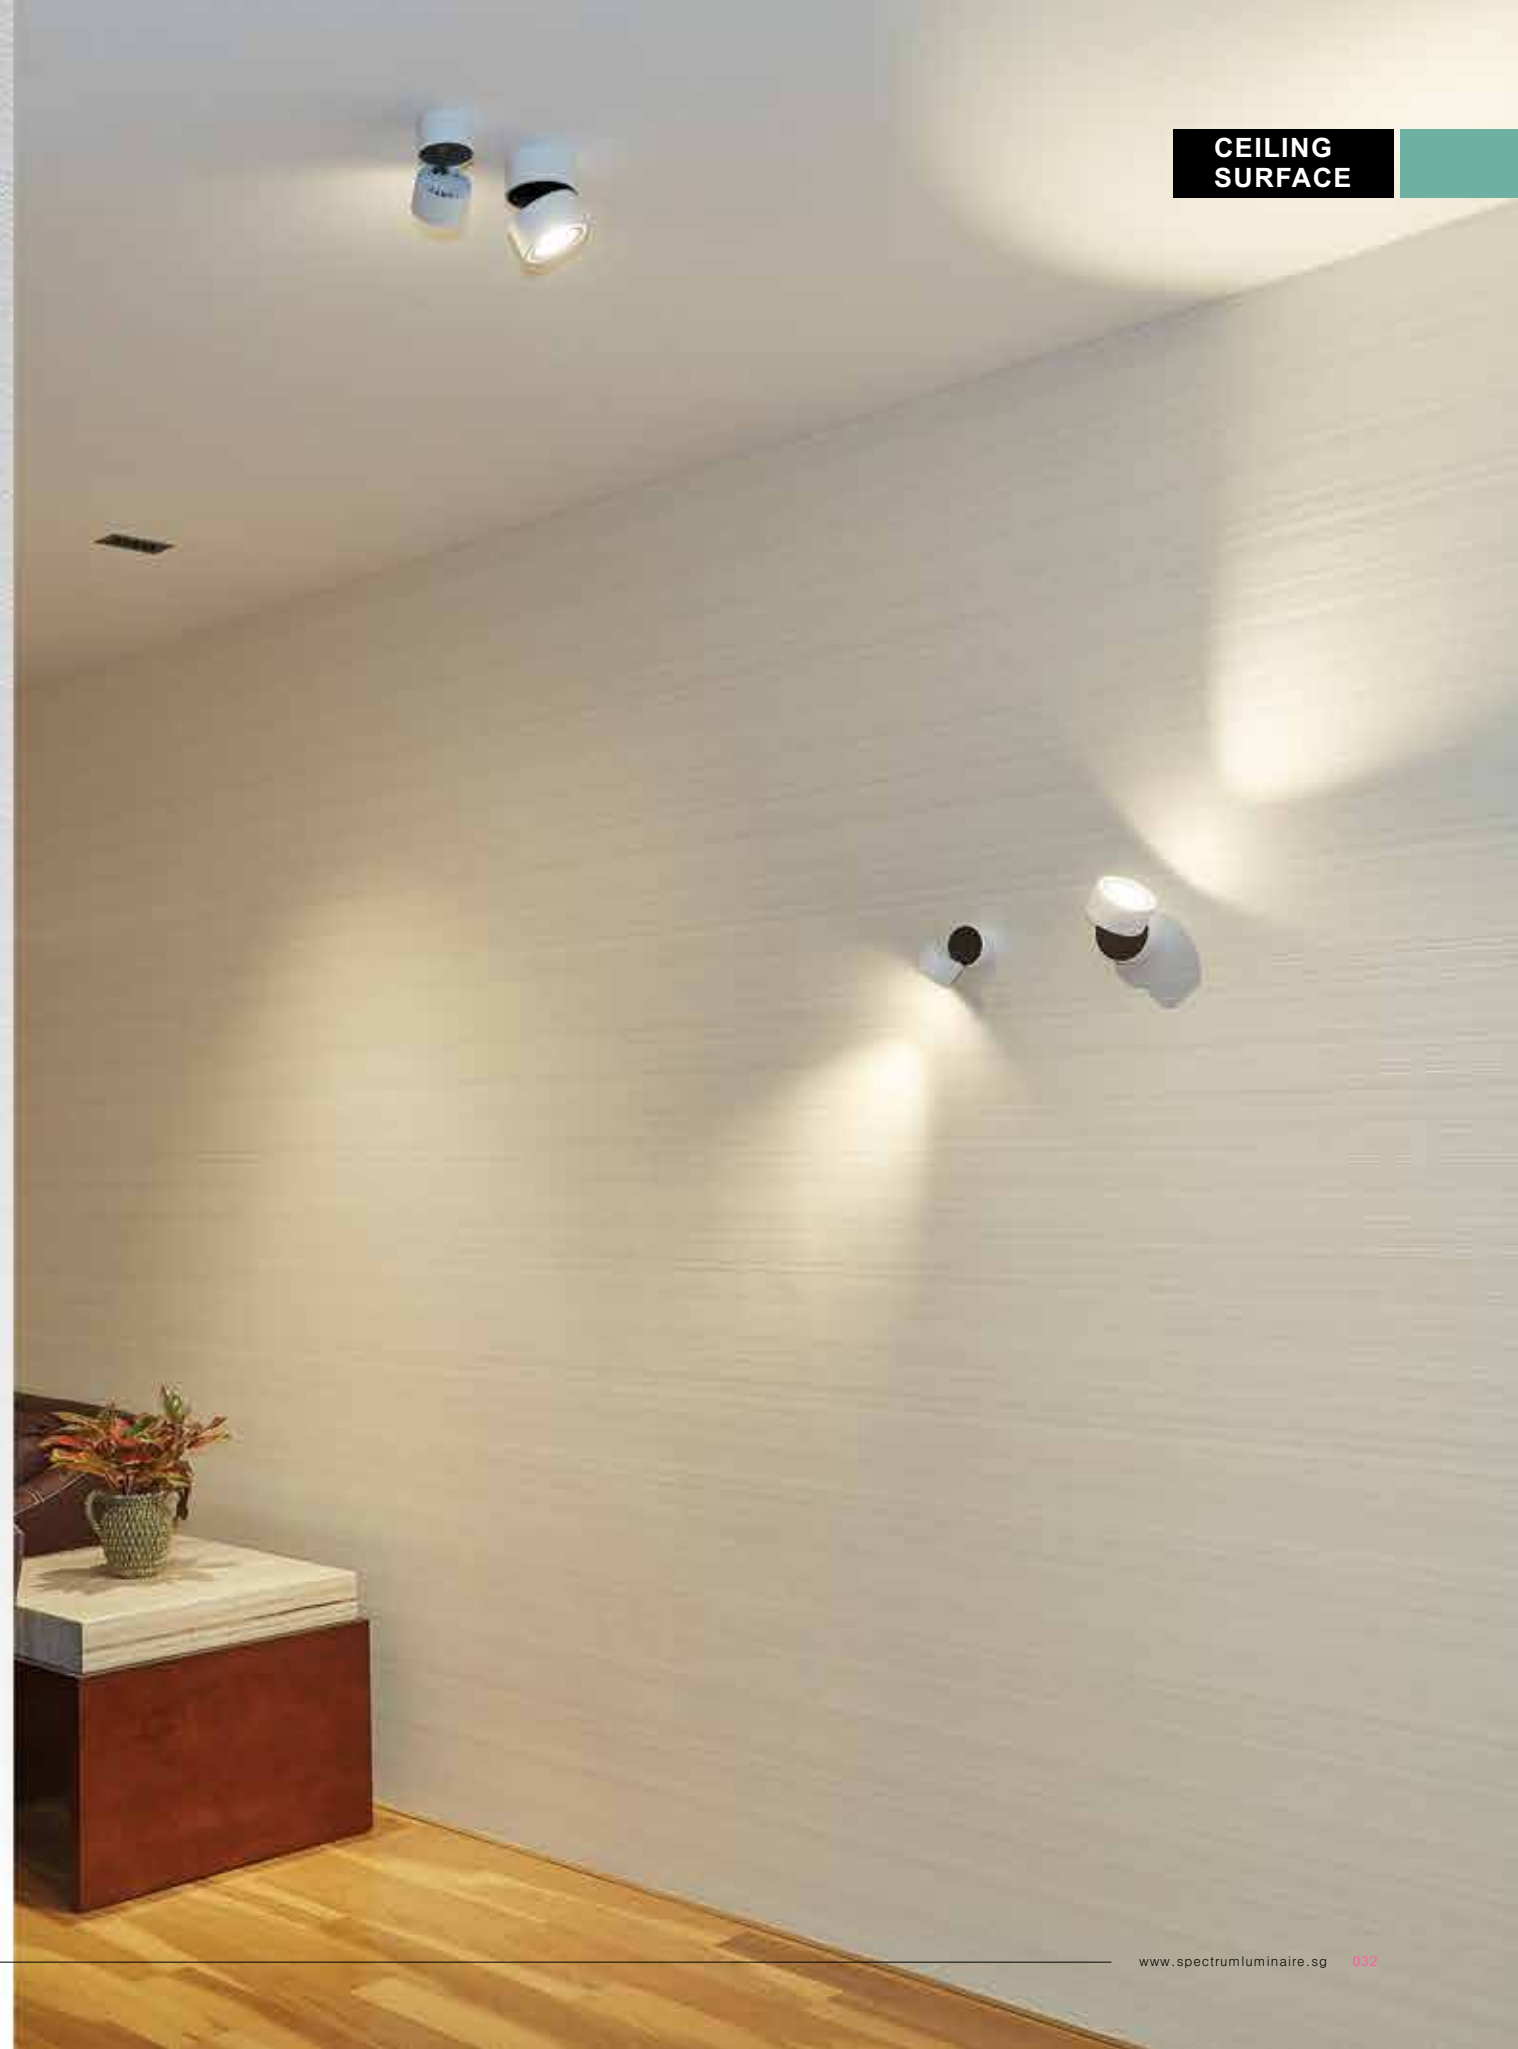




TWINS MINI H125 ED-GU10

GU10 1x50W



MATERIAL:ALUMINUM
ROTATES:350°
SPOT HEAD ADJUST: 90°
LAMP:1xGU10 50W
GU10 220-240V/50-60Hz

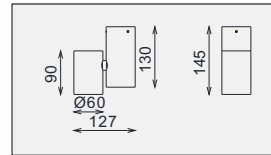


IP20/ROHS/CE

TWINS MINI H125 ED-MR16

MR16 1x50W



MATERIAL:ALUMINUM
ROTATES:350°
SPOT HEAD ADJUST: 90°
LAMP:1xMR16 LED 50W
GU5.3/12V INCL.TRANSFO
AC 100-240V/50-60Hz

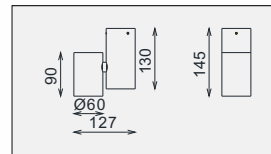


IP20/ROHS/CE

TWINS MINI H130 ED-9W

LED 1x9W



MATERIAL:ALUMINUM DIE-CAST
ROTATES:350°
SPOT HEAD ADJUST: 90°
LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm/CRI80/3000K,739lm/CRI90/3000K,
INCL.LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

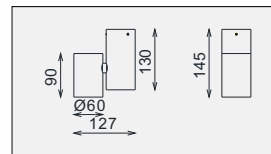

IP20/ROHS/CE


AVAILABLE COLOR:WHI/GLD,WHI/BLK,BLK/GLD,SLV GRY/BLK

BROTHERS BOBO ED-14W

LED 1x14W



MATERIAL:ALUMINUM DIE-CAST
ROTATES:350°
SPOT HEAD ADJUST: 90°
LAMP:BRIDGELUX VERO 10 1x13.7W/500mA,
1354lm/CRI80/3000K,1074lm/CRI90/3000K,
890lm/CRI97/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90/97

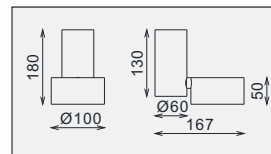


IP20/ROHS/CE

BROTHERS BOBO ED-14W DIM

LED 1x14W



MATERIAL:ALUMINUM DIE-CAST
ROTATES:350°
SPOT HEAD ADJUST: 90°
LAMP:BRIDGELUX VERO 10 1x13.7W/500mA,
1354lm/CRI80/3000K,1074lm/CRI90/3000K,
890lm/CRI97/3000K,
INCL. LED POWER SUPPLY 500mA-DC TRIAC DIM
AC 100-240V/50-60Hz
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90/97

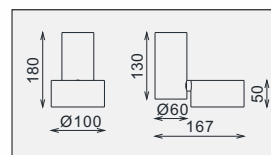

IP20/ROHS/CE

AVAILABLE COLOR:SAND WHITE, SAND BLACK, CHAMPAGNE




BROTHERS ED-23W

LED 1x23W



MATERIAL:ALUMINUM DIE-CAST
ROTATES:350°
SPOT HEAD ADJUST: 90°
LAMP:BRIDGELUX V13 Array LED 1x23.4W
2540lm/3000K/CRI 80 1969lm/3000K/CRI90
INCL.LED POWER SUPPLY 700mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE:16°, 34°, 50°.CRI 80/90.

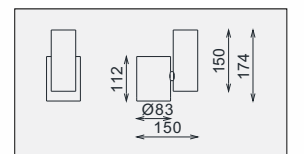

AVAILABLE COLOR:
WHI/GLD
WHI/BLK
BLK/GLD
SLV GRY/BLK


IP20/ROHS/CE

BROTHERS ED-33W

LED 1x33W



MATERIAL:ALUMINUM DIE-CAST
ROTATES:350°
SPOT HEAD ADJUST: 90°
LAMP:BRIDGELUX V15 Array 1x33.3W/900mA,
3550lm/CRI80/3000K,2793lm/CRI90/3000K,
INCL. LED POWER SUPPLY 900mA-DC
AC 100-240V/50-60Hz
REFLECTOR ANGLE:19°, 31°, 43°.CRI 80/90.

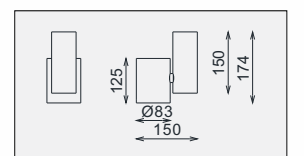

AVAILABLE COLOR:
WHI/GLD
WHI/BLK
BLK/GLD
SLV GRY/BLK

IP20/ROHS/CE

CEILING
SURFACE




TELESCOPE



MATERIAL:ALU DIE-CAST+ALU ADJUSTABLE ANGLE:FIXED
AVAILABLE COLOR:Sand White, Sand Black, Champagne IP40/ROHS/CE/LED

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP (BRIDGELUX)	REFLECTOR ANGLE	SIZE(mm) ØxH	INPUT VOLTAGE (V)
TELESCOPE	1x6.2W	350mA NO DIM	703	550	V8 Array	32°, 48°	90x112	100~240V
TELESCOPE L-9W	1x9.2W	500mA NO DIM	945	739	V8 Array	32°, 48°	90x150	100~240V
TELESCOPE L-9W DIM	1x9.2W	500mA TRIAC DIMMING	945	739	V8 Array	32°, 48°	90x150	220~240V




CEILING
SURFACE



MUSIC BOX

MATERIAL:ALU DIE-CAST ADJUSTABLE ANGLE:FIXED
AVAILABLE COLOR:Sand White, Sand Black, Champagne IP40/ROHS/CE/LED

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP (BRIDGELUX)	REFLECTOR ANGLE	INPUT VOLTAGE (V)
MUSIC BOX -9W	1x9.2W	500mA NO DIM	945	739	V8 Array	32°, 48°	100~240V
MUSIC BOX-9W DIM	1x9.2W	500mA TRIAC DIMMING	945	739	V8 Array	32°, 48°	220~240V
MUSIC BOX-14W	1x13.8W	500mA NO DIM	1474	1167	V10 Array	35°, 52°	220~240V
MUSIC BOX-14W DIM	1x13.8W	500mA TRIAC DIMMING	1474	1167	V10 Array	35°, 52°	220~240V



CEILING SURFACE


CEILING SURFACE



FASHION ED

MATERIAL:ALU DIE-CAST+ALU ADJUSTABLE ANGLE:0~20°/350°
 AVAILABLE COLOR:WH/BK/WH, Champagne, Sand Black, WH/BK IP20/ROHS/CE/☑/♻️

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CR180	LUMINOUS FLUX(lm) 3000K/CR190	LAMP (BRIDGELUX)	REFLECTOR ANGLE	SIZE(mm) WxLxH	INPUT VOLTAGE (V)
FASHION ED-6W	1x6.2W	350mA	703	550	V8 Array	17, 32°, 48°	93x93x130	100~240V
FASHION ED-9W	1x9.2W	500mA	945	739	V8 Array	17, 32°, 48°	93x93x130	100~240V
FASHION ED-MR16	1x50W	12V TRANSFO	/	/	MR16	/	93x93x120	220~240V
FASHION ED-GU10	1x50W	/	/	/	GU10	/	93x93x120	220~240V
FASHION 2 ED-6W	2x6.2W	350mA	2x703	2x550	V8 Array	17, 32°, 48°	186x93x130	100~240V
FASHION 2 ED-9W	2x9.2W	500mA	2x945	2x739	V8 Array	17, 32°, 48°	186x93x130	100~240V
FASHION 2 ED-MR16	2x50W	12V TRANSFO	/	/	MR16	/	186x93x120	220~240V
FASHION 2 ED-GU10	2x50W	/	/	/	GU10	/	186x93x120	220~240V

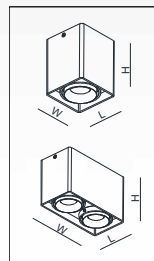


HDL-5600 MR16 1x50W

MATERIAL:ALUMINUM
 ADJUSTABLE ANGLE:0~28°/350°

LAMP:1xMR16 MAX.50W
 GU5.3/12V INCL.TRANSFO
 AC 220~240V/50~60Hz ☑

AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush

IP20/ROHS/CE/♻️




HDL-5600 GU10 1x50W

MATERIAL:ALUMINUM
 ADJUSTABLE ANGLE:0~28°/350°

LAMP:1XGU10 MAX.50W
 GU10 220~240V/50~60Hz ☑

AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush

IP20/ROHS/CE/♻️




HDL-5601 MR16 1x50W

MATERIAL:ALUMINUM
 ADJUSTABLE ANGLE:0~28°/350°

LAMP:1xMR16 MAX.50W
 GU5.3/12V INCL.TRANSFO
 AC220~240V/50~60Hz ☑

AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush

IP20/ROHS/CE/♻️




HDL-5601 GU10 1x50W

MATERIAL:ALUMINUM
 ADJUSTABLE ANGLE:0~28°/350°

LAMP:1XGU10 MAX.50W
 GU10 220~240V/50~60Hz ☑

AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush

IP20/ROHS/CE/♻️




HDL-5602 MR16 2x50W

MATERIAL:ALUMINUM
 ADJUSTABLE ANGLE:0~28°/350°

LAMP:2xMR16 MAX.50W
 GU5.3/12V INCL.TRANSFO
 AC 220~240V/50~60Hz ☑

AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush

IP20/ROHS/CE/♻️




HDL-5602 GU10 2x50W

MATERIAL:ALUMINUM
 ADJUSTABLE ANGLE:0~28°/350°

LAMP:2XGU10 MAX.50W
 GU10 220~240V/50~60Hz ☑

AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush

IP20/ROHS/CE/♻️





TONY

Very simple appearance presents a classic style. Offering changeable black or gold color front rings, which enriched the color matching of the product, customers can change the product style very freely.

Abundant product series give more options to customers, there are various versions like single light, three lights, four lights or linear four lights, etc.

Using Bridgelux led chip, which has steady performance, high lighting output and high CRI. We can make good control on the color binning within 2 SDCM in continuous supply.

There are three sizes of the cylinder, different outputs, TRIAC dimming and non-dimmable versions for options.




TONY MINI LED 1x5W

MATERIAL: ALUMINUM
ADJUSTABLE ANGLE: FIXED

LAMP: BRIDGELUX V6 ARRAY 1x4.6W/500mA, 440lm/CRI80/3000K, 375lm/CRI90/3000K, REFLECTOR ANGLE: 26°, 38°. CRI 80/90.
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz
LENS ANGLE: 20°, 30°. CRI 80/90.

IP20/ROHS/CE/



TONY MINI H200: H=200mm
TONY MINI H400: H=400mm

TONY LED 1x9W

MATERIAL: ALUMINUM
ADJUSTABLE ANGLE: FIXED

LAMP: BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K, 739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz
REFLECTOR ANGLE: 32°, 48°. CRI 80/90.


IP20/ROHS/CE/

TONY DIM LED 1x9W

MATERIAL: ALUMINUM
ADJUSTABLE ANGLE: FIXED

LAMP: BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K, 739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC TRIAC DIM
AC 220-240V/50-60Hz
REFLECTOR ANGLE: 32°, 48°. CRI 80/90.

IP20/ROHS/CE/



TONY H250: H=250mm
TONY H400: H=400mm
TONY DIM H250: H=250mm
TONY DIM H400: H=400mm

TONY MIDI LED 1x14W

MATERIAL: ALUMINUM DIE-CAST
ADJUSTABLE ANGLE: FIXED

LAMP: BRIDGELUX V10 ARRAY 1x13.8W/500mA, 1474lm/CRI80/3000K, 1167lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE: 35°, 50°. CRI 80/90



IP20/ROHS/CE/

TONY MIDI DIM LED 1x14W

MATERIAL: ALUMINUM DIE-CAST
ADJUSTABLE ANGLE: FIXED

LAMP: BRIDGELUX V10 ARRAY 1x13.8W/500mA, 1474lm/CRI80/3000K, 1167lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC TRIAC DIM
AC 220-240V/50-60Hz
REFLECTOR ANGLE: 35°, 50°. CRI 80/90

IP20/ROHS/CE/

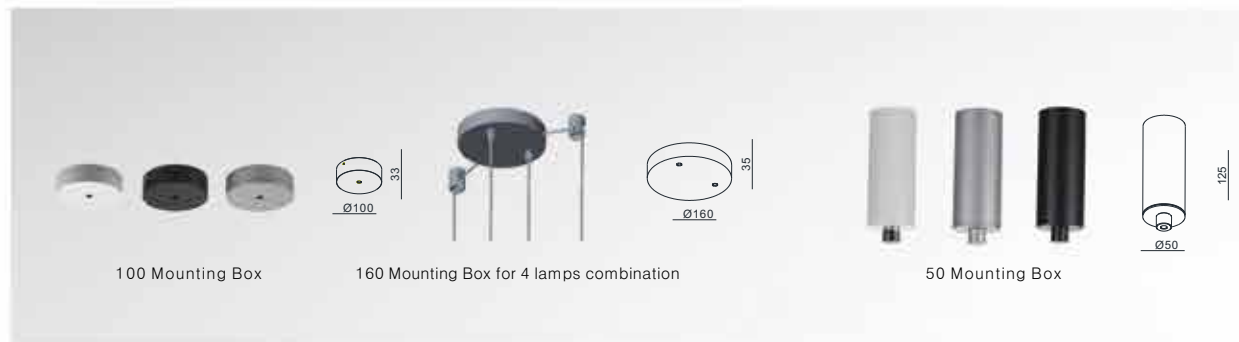


TONY MINI 4 DIM LED 4x5W

MATERIAL: ALUMINUM
ADJUSTABLE ANGLE: FIXED

LAMP: BRIDGELUX V6 ARRAY 4x4.6W/500mA, 4x440lm/CRI80/3000K, 4x375lm/CRI90/3000K, REFLECTOR ANGLE: 26°, 38°. CRI 80/90.
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz
LENS ANGLE: 20°, 30°. CRI 80/90.

IP20/ROHS/CE/




TONY MINI 4 DIM H200: H=200mm
TONY MINI 4 DIM H400: H=400mm

TONY 4 DIM LED 4x9W

MATERIAL: ALUMINUM
ADJUSTABLE ANGLE: FIXED

LAMP: BRIDGELUX V8 ARRAY 4x9.2W/500mA, 4x945lm/CRI80/3000K, 4x739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC TRIAC DIM
AC 220-240V/50-60Hz
REFLECTOR ANGLE: 32°, 48°. CRI 80/90.

IP20/ROHS/CE/




TONY 4 DIM H250: H=250mm
TONY 4 DIM H400: H=400mm

INTERIOR

CEILING RECESSED



EVA DESIGN P047



TOM P058



UNIVERSAL RD P075



FOCUS COLD RD P082



DE-20 P093



DL-560 P119



GD-165 P132



MAKE P049



X-SKY P060



JANE OK P077



X-HALO P084



ON-20 P101



DY-168 P125



DL-562 P133



EVA P052



NEW 130 P062



X-EVA P078



HALO P086



HIDE-20 P107



ALLEN P126



DL-660 P134



EVA FIXED P055



DANNY MINI P065



MIKE P080



HALO OK P087



GD-174 P111



FASHION P130



DE-20 F P136



MAKE WALLWASH P056



X-DANNY P071



FOCUS COLD RD P083



DE-20 FIX P091



DE-26 P115



EASY P131



CEILING
RECESSED



EVA DESIGN

This series is owning a simple appearance. It provided the lamp head a 400mm elasticity (stretch out and draw back) based on ingeniously designed. Meanwhile it can be a 350°/30° adjustment of rotating/ tilting.

Using Luxeon MZ led from Philips Lumileds company, which has very steady performance.

Customers can freely use single unit or combine with 3 units, 5 units, 7 units or multi units as a group, It will looks more fashionable and active when in a combination.

Using superior European reflector, which assured a outstanding optical data and natural comfortable lighting performance!

PHILIPS
LUMILEDS

CEILING
RECESSED




EVA DESIGN LX MZ LED 1x8W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP: LUXEON MZ 1x7.8W/700mA
780lm/CRI80/3000K,
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 33°.CRI 80.

AVAILABLE COLOR:
WHI
BLK
WHI/GLD
WHI/BLK
BLK/GLD
SLV GRY/BLK

IP20/ROHS/CE/▽
Ø83



EVA DESIGN-LUXEON MZ H250:H=250mm

EVA DESIGN-LUXEON MZ H400:H=400mm


EVA DESIGN HIDE-LX MZ LED 1x8W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP: LUXEON MZ 1x7.8W/700mA
780lm/CRI80/3000K,
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 33°.CRI 80.
INCL MOUNTING KIT 5


AVAILABLE COLOR:
WHI
BLK
WHI/GLD
WHI/BLK
BLK/GLD
SLV GRY/BLK

IP20/ROHS/CE/▽
KIT 5




EVA DESIGN HIDE-LUXEON MZ H250:H=250mm

EVA DESIGN HIDE-LUXEON MZ H400:H=400mm

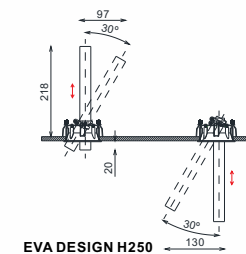

EVA DESIGN H250

MOUNTING KIT 5
MATERIAL:ALUMINUM



Ø114 H150



MAKE

BRIDGELUX
LED CHIPS



WHI/BLK/GLD



WHI/BLK/WHI/BLK



WHI/BLK/BLK



WHI/BLK



WHI/SLV



WHII/GLD



SLV GRY/BLK/SLV GRY/BLK



SLV GRY/BLK



BLK



BLK/GLD



Silver
RING-37S



Black
RING-37B




Gold
RING-37G




Honeycomb-35



Linear Spread-35



Softening Lens-35




Spread Lens-35



MAKE -9W LED 1x9W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°/355°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°. CRI 80/90.



IP20/ROHS/CE/▽


86x86 H140



MAKE 2-9W LED 2x9W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°/355°

LAMP:BRIDGELUX V8 ARRAY 2x9.2W/500mA
2x945lm/CRI80/3000K,2x739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°. CRI 80/90.



IP20/ROHS/CE/▽


168x86 H140



MAKE HIDE-9W LED 1x9W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°/360°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°. CRI 80/90.
INCL MOUNTING KIT 1




IP20/ROHS/CE/▽

KIT 1 H140

MOUNTING KIT 1
MATERIAL:ALU+STEEL


110x110 H140



MAKE 2 HIDE-9W LED 2x9W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°/360°

LAMP:BRIDGELUX V8 ARRAY 2x9.2W/500mA
2x945lm/CRI80/3000K,2x739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°. CRI 80/90.
INCL MOUNTING KIT 2




IP20/ROHS/CE/▽

KIT 2 H140

MOUNTING KIT 2
MATERIAL:ALU+STEEL

191x110 H140




EVA

EVA LED 1x9W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°/360°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°. CRI 80/90.

IP20/ROHS/CE/▽
Ø83 H150





EVA HIDE LED 1x9W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°/360°


LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°. CRI 80/90.
INCL MOUNTING KIT 5

IP20/ROHS/CE/▽
KIT 5 H150



MOUNTING KIT 5
MATERIAL:ALUMINUM

Ø114 H150



CEILING
RECESSED



EVA OK

EVA OK-6W LED 1x6W




MATERIAL: ALU DIE-CAST + ALU
ADJUSTABLE ANGLE: 0~20°/360°

LAMP: BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/CRI80/3000K, 550lm/CRI90/3000K, EXCL. LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE: 23°, 34°, 50°. CRI 80/90.

IP20/ROHS/CE/▽

Ø83 H90



EVA OK HIDE-6W LED 1x6W




MATERIAL: ALU DIE-CAST + ALU
ADJUSTABLE ANGLE: 0~20°/360°

LAMP: BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/CRI80/3000K, 550lm/CRI90/3000K, EXCL. LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE: 23°, 34°, 50°. CRI 80/90.
INCL. MOUNTING KIT 5


IP20/ROHS/CE/▽

KIT 5 H90



MOUNTING KIT 5
MATERIAL: ALUMINUM

Ø114 H150



CEILING
RECESSED



WHI/BLK/GLD



WHI/BLK/WHI/BLK



WHI/BLK/BLK



WHI/BLK



WHI/SLV



WHI/GLD



SLV GRY/BLK/SLV GRY/BLK



SLV GRY/BLK



BLK



BLK/GLD



WHI/BLK



WHI/SLV



WHI/GLD



SLV GRY/BLK



BLK



BLK/GLD



Silver
RING-57S



Black
RING-57B



Gold
RING-57G



Honeycomb-35



Linear Spread-35



Softening Lens-35



Spread Lens-35



EVA FIXED - 9W LED 1x9W

MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:FIXED


LAMP:BRIDGELUX V10 ARRAY 1x9.3W/350mA
1075lm/CRI80/3000K,851lm/CRI90/3000K
EXCL.LED POWER SUPPLY 350mA-DC

REFLECTOR ANGLE:35°, 50°.CRI 80/90

AVAILABLE COLOR:
WHI
BLK
SLV GRY
GLD

IP20/ROHS/CE/

Ø83 H150



EVA FIXED HIDE - 9W LED 1x9W

MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:FIXED


LAMP:BRIDGELUX V10 ARRAY 1x9.3W/350mA
1075lm/CRI80/3000K,851lm/CRI90/3000K
EXCL.LED POWER SUPPLY 350mA-DC

REFLECTOR ANGLE:35°, 50°.CRI 80/90
INCL. MOUNTING KIT 5

AVAILABLE COLOR:
WHI
BLK
SLV GRY
GLD


IP20/ROHS/CE/

KIT 5 H150



MOUNTING KIT 5
MATERIAL:ALUMINUM

Ø114



EVA FIXED MIDI - 14W LED 1x14W

MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:FIXED


LAMP:BRIDGELUX VERO 10 1x13.7W/350mA
1354lm/CRI80/3000K,1074lm/CRI90/3000K,
890lm/CRI97/3000K,
EXCL.LED POWER SUPPLY 350mA-DC

REFLECTOR ANGLE:31°, 49°.CRI 80/90/97

AVAILABLE COLOR:
WHI
BLK
SLV GRY
GLD

IP20/ROHS/CE/

Ø102 H150



EVA FIXED MIDI HIDE - 14W LED 1x14W

MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:FIXED


LAMP:BRIDGELUX VERO 10 1x13.7W/350mA,
1354lm/CRI80/3000K,1074lm/CRI90/3000K,
890lm/CRI97/3000K,
EXCL.LED POWER SUPPLY 350mA-DC

REFLECTOR ANGLE:31°, 49°.CRI 80/90/97
INCL. MOUNTING KIT 12

AVAILABLE COLOR:
WHI
BLK
SLV GRY
GLD


IP20/ROHS/CE/

KIT 12 H150



MOUNTING KIT 12
MATERIAL:ALUMINUM

Ø127



MAKE WALLWASH LED 1x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:FIXED 30°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:48°.CRI 80/90.

AVAILABLE COLOR:
WHI
BLK
SLV GRY
WHI/BLK

IP20/ROHS/CE/

83x83 H135



MAKE WALLWASH-MR16 1x50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED 30°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WHI
BLK
SLV GRY
WHI/BLK

IP20/ROHS/CE/

83x83 H170



MAKE WALLWASH-GU10 1x50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED 30°

LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WHI
BLK
SLV GRY
WHI/BLK

IP20/ROHS/CE/

83x83 H170



EVA WALLWASH LED 1x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:FIXED 30°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:48°.CRI 80/90.

AVAILABLE COLOR:
WHI
BLK
SLV GRY
WHI/BLK

IP20/ROHS/CE/

Ø83 H135



EVA WALLWASH-MR16 1x50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED 30°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WHI
BLK
SLV GRY
WHI/BLK

IP20/ROHS/CE/

Ø83xH170



EVA WALLWASH-GU10 1x50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED 30°

LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WHI
BLK
SLV GRY
WHI/BLK

IP20/ROHS/CE/

Ø83xH170





TOM


TOM 2 LED 2x8W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:FIXED

LAMP:OSLON Square 2x4X2W/ 700mA, 2x896lm/CRI80, 2x776lm/CRI90,
EXCL. LED POWER SUPPLY 700mA-DC
LENS ANGLE:30°, 50°.CRI 80/90.

AVAILABLE COLOR:
WH/WH
WH/BK
WH/GLD
BK/BK
BK/GLD

IP20/ROHS/CE/▽
168x86 H100




TOM LED 1x8W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:FIXED

LAMP:OSLON Square 1x4X2W/ 700mA, 896lm/CRI80, 776lm/CRI90,
EXCL. LED POWER SUPPLY 700mA-DC
LENS ANGLE:30°, 50°.CRI 80/90.

AVAILABLE COLOR:
WH/WH
WH/BK
WH/GLD
BK/BK
BK/GLD

IP20/ROHS/CE/▽
86x86 H100



TOM HIDE LED 1x8W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:FIXED


LAMP:OSLON Square 1x4X2W/ 700mA, 896lm/CRI80, 776lm/CRI90,
EXCL. LED POWER SUPPLY 700mA-DC
LENS ANGLE:30°, 50°.CRI 80/90.
INCL. MOUNTING KIT 1

AVAILABLE COLOR:
WH/WH
WH/BK
WH/GLD
BK/BK
BK/GLD

IP20/ROHS/CE/▽
KIT 1 H100


MOUNTING KIT 1
MATERIAL:ALU DE-CAST

110x110



MOUNTING KIT 1
MATERIAL:ALU DE-CAST

191x110





TOM 2 HIDE LED 2x8W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:FIXED

LAMP:OSLON Square 2x4X2W/ 700mA, 2x896lm/CRI80, 2x776lm/CRI90,
EXCL. LED POWER SUPPLY 700mA-DC
LENS ANGLE:30°, 50°.CRI 80/90.
INCL. MOUNTING KIT 2

AVAILABLE COLOR:
WH/WH
WH/BK
WH/GLD
BK/BK
BK/GLD

IP20/ROHS/CE/▽
KIT 2 H100



CEILING
RECESSED



CEILING
RECESSED



X-SKY


X-SKY is a series for essential lighting, its appearance design is consistent with the own minimalist style of NSL, classic and good-looking. During these two years, it has become a star product of NSL.

With the development of LED technology, meanwhile benefited from LUXEON 3030 2D(2 chip)SMD and a PMMA lens with superior diffusing effect, X-SKY series has got further technology upgrading, now it has higher output and more competitive price!

MATERIAL:ALU DIE-CAST + PMMA ADJUSTABLE ANGLE:FIXED
AVAILABLE COLOR:Sand White、Sand Black IP44/ROHS/CE/LED



MODEL NO.	POWER (W)	DRIVER(EXCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP	SIZE(mm) WxLxH	Cut-Out(mm) WxLxH
X-SKY-10W	1x10W	500mA	1120	902	LUXEON 3030 2D	102x102x76	93x93x86
X-SKY MIDI-16W	1x16W	500mA	1700	1501	LUXEON 3030 2D	145x145x82	130x130x92
X-SKY MAX-22W	1x22W	700mA	2420	2145	LUXEON 3030 2D	175x175x82	163x163x102
X-SKY MM-22W	1x22W	700mA	2420	2145	LUXEON 3030 2D	200x200x82	183x183x102
X-SKY MM-33W	1x33W	1050mA	3580	3157	LUXEON 3030 2D	200x200x82	183x183x102




MOUNTING KIT 3A	MOUNTING KIT 14	MOUNTING KIT 13	MOUNTING KIT 24
MATERIAL:ALUMINUM 116x116 H100	MATERIAL:ALUMINUM 185x185 H110	MATERIAL:ALUMINUM 154x154 H110	MATERIAL:ALUMINUM 205x205 H110

MATERIAL:ALU DIE-CAST + PMMA ADJUSTABLE ANGLE:FIXED
AVAILABLE COLOR:Sand White、Sand Black IP44/ROHS/CE/LED



MODEL NO.	POWER (W)	DRIVER(EXCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP	SIZE(mm) WxLxH	INCL MOUNTING KIT
X-SKY HIDE-10W	1x10W	500mA	1120	902	LUXEON 3030 2D	92x92x76	MOUNTING KIT 3A
X-SKY MIDI HIDE-16W	1x16W	500mA	1700	1501	LUXEON 3030 2D	128x128x82	MOUNTING KIT 13
X-SKY MAX HIDE-22W	1x22W	700mA	2420	2145	LUXEON 3030 2D	159x159x82	MOUNTING KIT 14
X-SKY MM HIDE-22W	1x22W	700mA	2420	2145	LUXEON 3030 2D	182x182x82	MOUNTING KIT 24
X-SKY MM HIDE-33W	1x33W	1050mA	3580	3157	LUXEON 3030 2D	182x182x82	MOUNTING KIT 24





NEW 130 MINI-6W


MATERIAL:ALU DIE-CAST + PMMA
ADJUSTABLE ANGLE:FIXED

LAMP:LUXEON 3030 2D 6x1.07W/500mA
663lm/CRI80/3000K,585lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
3000K/4000K/5000K.CRI 80/90

AVAILABLE COLOR:
Sand Black
Sand White
Silver Grey
Sand Black/Sand Gold
Sand White/Sand Gold

IP44/ROHS/CE/▽

Ø83 H87



NEW 130-10W


MATERIAL:ALU DIE-CAST + PMMA
ADJUSTABLE ANGLE:FIXED

LAMP:LUXEON 3030 2D 9x1.07W/500mA,
1120lm/CRI80/3000K,902lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
3000K/4000K/5000K.CRI 80/90

AVAILABLE COLOR:
Sand Black
Sand White
Silver Grey
Sand Black/Sand Gold
Sand White/Sand Gold

IP44/ROHS/CE/▽

Ø102 H95



NEW 130 MIDI-13W


MATERIAL:ALU DIE-CAST + PMMA
ADJUSTABLE ANGLE:FIXED

LAMP:LUXEON 3030 2D 12x1.07W/500mA,
1436lm/CRI80/3000K,1267lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
3000K/4000K/5000K.CRI 80/90

AVAILABLE COLOR:
Sand Black
Sand White
Silver Grey
Sand Black/Sand Gold
Sand White/Sand Gold

IP44/ROHS/CE/▽

Ø133 H105



NEW 130 MAX-13W


MATERIAL:ALU DIE-CAST + PMMA
ADJUSTABLE ANGLE:FIXED

LAMP:LUXEON 3030 2D 12x1.07W/500mA,
1436lm/CRI80/3000K,1267lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
3000K/4000K/5000K.CRI 80/90

AVAILABLE COLOR:
Sand Black
Sand White
Silver Grey
Sand Black/Sand Gold
Sand White/Sand Gold

IP44/ROHS/CE/▽

Ø163 H105



NEW 130 MAX-19W


MATERIAL:ALU DIE-CAST + PMMA
ADJUSTABLE ANGLE:FIXED

LAMP:LUXEON 3030 2D 18x1.07W/500mA,
2100lm/CRI80/3000K,1852lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
3000K/4000K/5000K.CRI 80/90

AVAILABLE COLOR:
Sand Black
Sand White
Silver Grey
Sand Black/Sand Gold
Sand White/Sand Gold

IP44/ROHS/CE/▽

Ø163 H105



CEILING
RECESSED



CEILING
RECESSED



DANNY MINI

This series products have strong mechanical performance. Its lamp head is very flexible. It can be extended out like a spot light with a turning adjustment of 90°/350° (Different styles has different angles). Or totally hide into the fixture like a normal recessed downlight.

Using Bridgelux V8 led chip, which has steady performance, high lighting output and high CRI. We can make good control on the color binning within 2 SDCM in continuous supply.

The luminaire can also apply with latest Luxeon MZ led chip from Philips Lumileds. The feature is the minimal lighting size, provide a more compact beam angle and stronger centre luminous intensity. We have got an efficient data: This led chip can achieve an excellent parameters as $cd/lm=19.3$ when using 9° reflector!

Professional reflector, make sure its excellent luminous data and natural comfortable performance.

There are multi lighting versions like standard recessed mounting, rimless hide mounting, and other two different versions with HALO decorating for customers' options.



PHILIPS
LUMILEDS

BRIDGELUX
LED CHIPS



**DANNY
MINI** LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP20/ROHS/CE/▽


Ø89 H126



**DANNY
MINI-LX MZ** LED 1x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:LUXEON MZ 1x7.8W/700mA,
780lm/CRI80/3000K
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.



**DANNY
MINI 1** LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP20/ROHS/CE/▽


Ø89 H126



**DANNY
MINI 1-LX MZ** LED 1x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:LUXEON MZ 1x7.8W/700mA,
780lm/CRI80/3000K
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.



**DANNY
MINI x2** LED 2x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:BRIDGELUX V8 ARRAY 2x9.2W/500mA,
2x945lm/CRI80/3000K,2x739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP20/ROHS/CE/▽


Ø89, L-100 H126



**DANNY
MINI x2-LX MZ** LED 2x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:LUXEON MZ 2x7.8W/700mA,
2x780lm/CRI80/3000K
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.



**DANNY
MINI 2** LED 2x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:BRIDGELUX V8 ARRAY 2x9.2W/500mA,
2x945lm/CRI80/3000K,2x739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP20/ROHS/CE/▽


Ø89, L-100 H126



**DANNY
MINI 2-LX MZ** LED 2x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:LUXEON MZ 2x7.8W/700mA,
2x780lm/CRI80/3000K
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.



**HALO DANNY
MINI** LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm/CRI80/3000K,739lm/CRI90/3000K,
EVERLIGHT SMD 12x0.1W,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP20/ROHS/CE/▽


Ø89 H126



**HALO DANNY
MINI-LX MZ** LED 1x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:LUXEON MZ 1x7.8W/700mA,
780lm/CRI80/3000K
EVERLIGHT SMD 12x0.1W,
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.



**HALO DANNY
MINI 1** LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm/CRI80/3000K,739lm/CRI90/3000K,
EVERLIGHT SMD 12x0.1W,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP20/ROHS/CE/▽


Ø89 H126



**HALO DANNY
MINI 1-LX MZ** LED 1x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:LUXEON MZ 1x7.8W/700mA,
780lm/CRI80/3000K
EVERLIGHT SMD 12x0.1W,
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.



**HALO DANNY
MINI x2** LED 2x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:BRIDGELUX V8 ARRAY 2x9.2W/500mA,
2x945lm/CRI80/3000K,2x739lm/CRI90/3000K,
EVERLIGHT SMD 12x0.1W,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP20/ROHS/CE/▽


Ø89, L-100 H126



**HALO DANNY
MINI x2-LX MZ** LED 2x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:LUXEON MZ 2x7.8W/700mA,
2x780lm/CRI80/3000K
EVERLIGHT SMD 12x0.1W,
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.



**HALO DANNY
MINI 2** LED 2x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
2x945lm/CRI80/3000K,2x739lm/CRI90/3000K,
EVERLIGHT SMD 12x0.1W,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP20/ROHS/CE/▽


Ø89, L-100 H126



**HALO DANNY
MINI 2-LX MZ** LED 2x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°

LAMP:LUXEON MZ 2x7.8W/700mA,
2x780lm/CRI80/3000K
EVERLIGHT SMD 12x0.1W,
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.






DANNY MINI HIDE LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°
LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K, 739lm/CRI90/3000K, EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.
INCL. MOUNTING KIT 8

IP20/ROHS/CE/▽
KIT 8 H126



DANNY MINI HIDE-LX MZ LED 1x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°
LAMP: LUXEON MZ 1x7.8W/700mA, 780lm /CRI80/3000K
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9° 11°
CRI 80.




HALO DANNY MINI HIDE LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°
LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K, 739lm/CRI90/3000K, EVERLIGHT SMD 12x0.1W, EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.
INCL. MOUNTING KIT 8

IP20/ROHS/CE/▽
KIT 8 H126

HALO DANNY MINI HIDE-LX MZ LED 1x8W


MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~90°/350°
LAMP: LUXEON MZ 1x7.8W/700mA, 780lm /CRI80/3000K
EVERLIGHT SMD 12x0.1W, EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°
CRI 80.

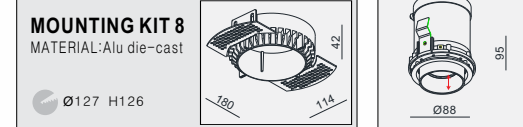

X-HALO DANNY MINI LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~80°/350°
LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K, 739lm/CRI90/3000K, EVERLIGHT SMD 12x0.1W, EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP20/ROHS/CE/▽
Ø89 H123



X-HALO DANNY MINI-LX MZ LED 1x8W


MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~80°/350°
LAMP: LUXEON MZ 1x7.8W/700mA, 780lm /CRI80/3000K
EVERLIGHT SMD 12x0.1W, EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11° CRI 80.



X-DANNY MINI LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~80°/350°
LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K, 739lm/CRI90/3000K, EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP20/ROHS/CE/▽
Ø89 H123



X-DANNY MINI-LX MZ LED 1x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~80°/350°
LAMP: LUXEON MZ 1x7.8W/700mA, 780lm /CRI80/3000K
EVERLIGHT SMD 12x0.1W, EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11° CRI 80.



EVA DANNY MINI H61 LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~45°/350°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.


IP20/ROHS/CE/▽
Ø102 H80



EVA DANNY MINI H61-LX MZ LED 1x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~45°/350°

LAMP:LUXEON MZ 1x7.8W/700mA
780lm/CRI80/3000K
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.



EVA DANNY MINI H61 HIDE LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~45°/350°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.
INCL MOUNTING KIT 12


IP20/ROHS/CE/▽
KIT 12 H80



EVA DANNY MINI H61 HIDE-LX MZ LED 1x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~45°/350°

LAMP:LUXEON MZ 1x7.8W/700mA
780lm/CRI80/3000K
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.
INCL MOUNTING KIT 12

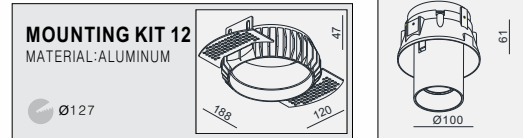

EVA DANNY MINI LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~45°/350°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.


IP20/ROHS/CE/▽
Ø102 H156



EVA DANNY MINI-LX MZ LED 1x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~45°/350°

LAMP:LUXEON MZ 1x7.8W/700mA
780lm/CRI80/3000K
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.



EVA DANNY MINI HIDE LED 1x9W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~45°/350°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.
INCL MOUNTING KIT 12


IP20/ROHS/CE/▽
KIT 12 H156




EVA DANNY MINI HIDE-LX MZ LED 1x8W

MATERIAL:Alu die-cast
ADJUSTABLE ANGLE:0~45°/350°

LAMP:LUXEON MZ 1x7.8W/700mA
780lm/CRI80/3000K
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:9°, 11°.CRI 80.
INCL MOUNTING KIT 12



WHI/SLV



WHI/BLK



WHI/BLK/WHI/BLK



SLV GRY/BLK



WHI/GLD



WHI/GLD/WHI/GLD




BLK



BLK/WHI/BLK



BLK/BLK/GLD

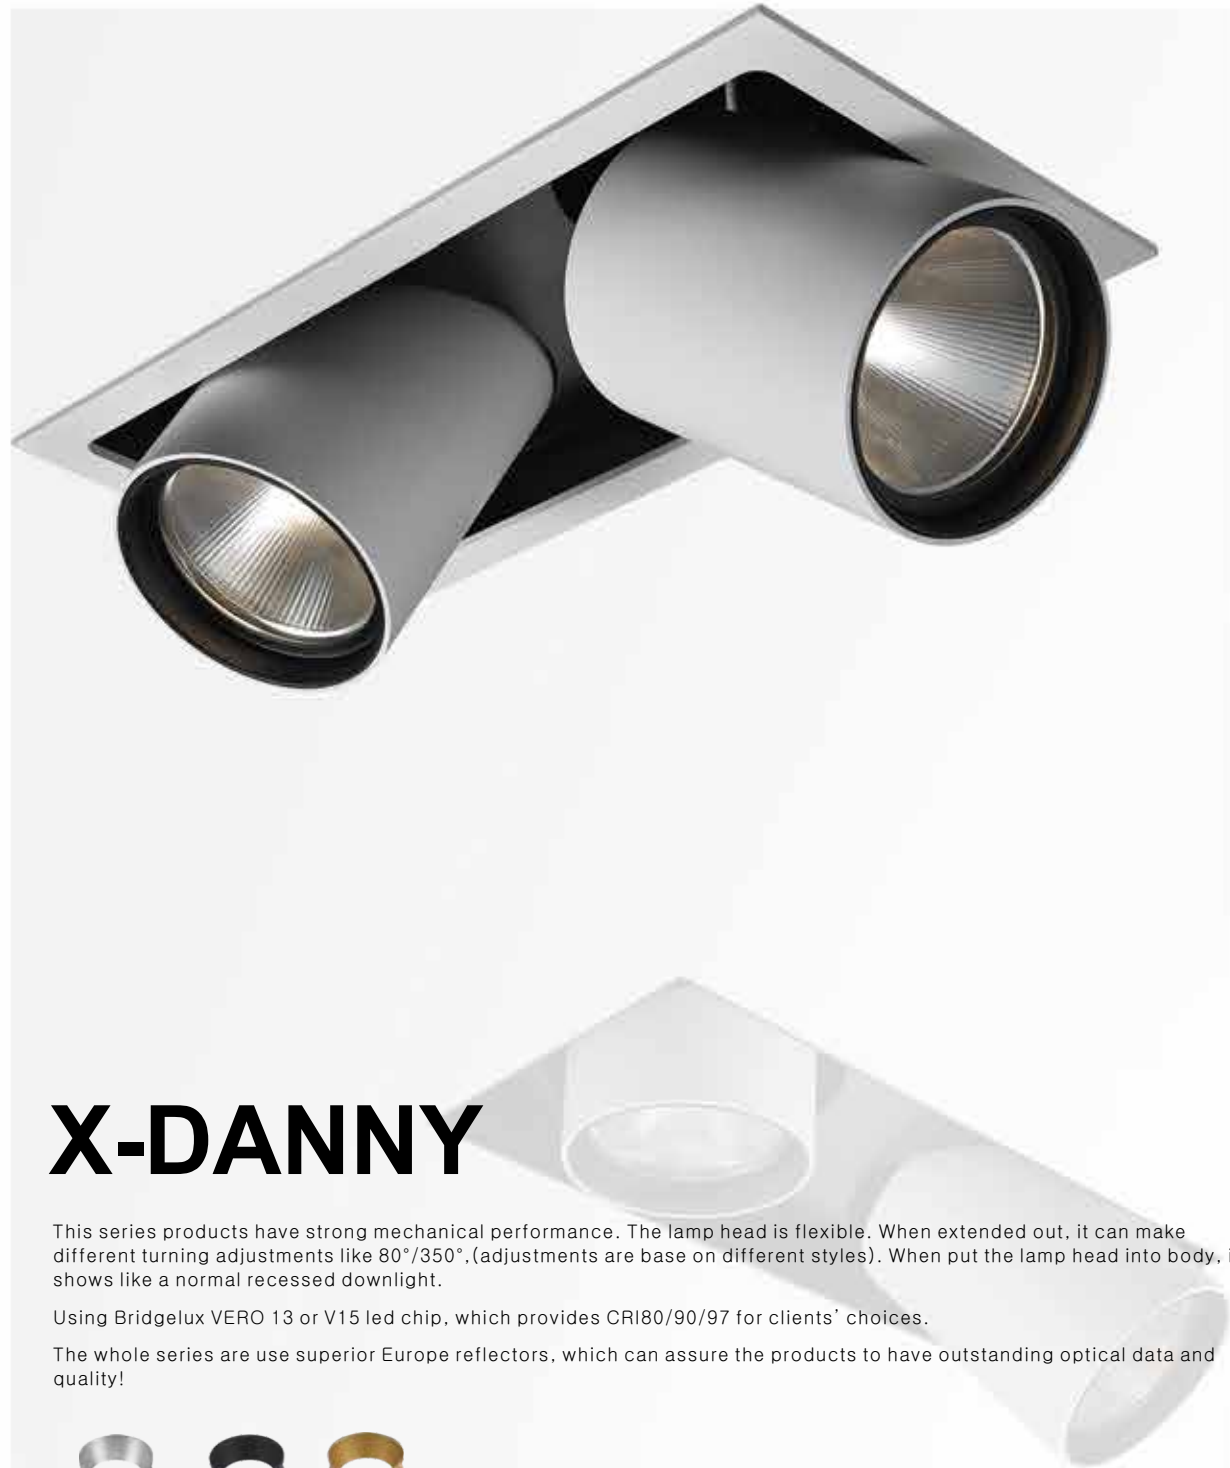

X-DANNY

This series products have strong mechanical performance. The lamp head is flexible. When extended out, it can make different turning adjustments like 80°/350°. (adjustments are base on different styles). When put the lamp head into body, it shows like a normal recessed downlight.

Using Bridgelux VERO 13 or V15 led chip, which provides CRI80/90/97 for clients' choices.

The whole series are use superior Europe reflectors, which can assure the products to have outstanding optical data and quality!



X-DANNY -33W LED 1x33W


MATERIAL:Alu die-cast +Steel
ADJUSTABLE ANGLE:0~80°/350°

LAMP: BRIDGELUX V15 Array
1x25.2/33.3W/500mA/900mA, ◇
2840~3550lm/CRI80/3000K,
2234~2793lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA~900mA-DC
REFLECTOR ANGLE:19°, 31°, 43°.CRI 80/90.

AVAILABLE COLOR:WHI, BLK, WHI/BLK/WHI/BLK, SLV GRY/BLK/SLV GRY/BLK

IP20/ROHS/CE/▽

132x132 H150

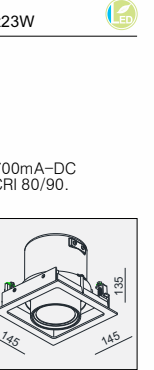

X-DANNY -23W LED 1x23W

MATERIAL:Alu die-cast +Steel
ADJUSTABLE ANGLE:0~80°/350°

LAMP: BRIDGELUX VERO 13
1x16.2/23.4W~500mA/700mA, ◇
1910~2540lm/CRI80/3000K,
1480~1969lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA~700mA-DC
REFLECTOR ANGLE:16°, 34°, 50°.CRI 80/90.

X-DANNY 2 -33W LED 2x33W

MATERIAL:Alu die-cast +Steel
ADJUSTABLE ANGLE:0~80°/350°

LAMP: BRIDGELUX V15 Array
2x25.2/33.3W/500mA/900mA, ◇
2840~3550lm/CRI80/3000K,
2234~2793lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA~900mA-DC
REFLECTOR ANGLE:19°, 31°, 43°.CRI 80/90.

AVAILABLE COLOR:WHI, BLK, WHI/BLK/WHI/BLK, SLV GRY/BLK/SLV GRY/BLK

IP20/ROHS/CE/▽

272x132 H150

X-DANNY 2 -23W LED 2x23W

MATERIAL:Alu die-cast +Steel
ADJUSTABLE ANGLE:0~80°/350°

LAMP: BRIDGELUX VERO 13
2x16.2/23.4W~500mA/700mA, ◇
1910~2540lm/CRI80/3000K,
1480~1969lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA~700mA-DC
REFLECTOR ANGLE:16°, 34°, 50°.CRI 80/90.



X-DANNY HIDE -33W LED 1x33W

MATERIAL:Alu die-cast +Steel
ADJUSTABLE ANGLE:0~80°/350°

LAMP: BRIDGELUX V15 Array
1x25.2/33.3W/500mA/900mA, ◇
2840~3550lm/CRI80/3000K,
2234~2793lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA~900mA-DC
REFLECTOR ANGLE:19°, 31°, 43°.CRI 80/90.
INCL MOUNTING KIT 10

AVAILABLE COLOR:WHI, BLK, WHI/BLK/WHI/BLK, SLV GRY/BLK/SLV GRY/BLK

IP20/ROHS/CE/▽

KIT 10 H150

X-DANNY HIDE -23W LED 1x23W

MATERIAL:Alu die-cast +Steel
ADJUSTABLE ANGLE:0~80°/350°

LAMP: BRIDGELUX VERO 13
1x16.2/23.4W~500mA/700mA, ◇
1910~2540lm/CRI80/3000K,
1480~1969lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA~700mA-DC
REFLECTOR ANGLE:16°, 34°, 50°.CRI 80/90.
INCL MOUNTING KIT 10



X-DANNY 2 HIDE-33W LED 2x33W

MATERIAL:Alu die-cast +Steel
ADJUSTABLE ANGLE:0~80°/350°

LAMP: BRIDGELUX V15 Array
2x25.2/33.3W/500mA/900mA, ◇
2840~3550lm/CRI80/3000K,
2234~2793lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA~900mA-DC
REFLECTOR ANGLE:19°, 31°, 43°.CRI 80/90.
INCL MOUNTING KIT 11

AVAILABLE COLOR:WHI, BLK, WHI/BLK/WHI/BLK, SLV GRY/BLK/SLV GRY/BLK

IP20/ROHS/CE/▽

KIT 11 H150

X-DANNY HIDE2 -23W LED 2x23W

MATERIAL:Alu die-cast +Steel
ADJUSTABLE ANGLE:0~80°/350°

LAMP: BRIDGELUX VERO 13
2x16.2/23.4W~500mA/700mA, ◇
1910~2540lm/CRI80/3000K,
1480~1969lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA~700mA-DC
REFLECTOR ANGLE:16°, 34°, 50°.CRI 80/90.
INCL MOUNTING KIT 11

CEILING
RECESSED



CEILING
RECESSED



DANNY S



DANNY S
-33W LED 1x33W

MATERIAL: Alu die-cast +Steel
ADJUSTABLE ANGLE: 0~80°/350°

LAMP: BRIDGELUX V15 Array
1x25.2/33.3W/500mA/900mA
2840~3550lm/CRI80/3000K,
2234~2793lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 500mA-900mA-DC
REFLECTOR ANGLE: 19°, 31°, 43°.CRI 80/90.

AVAILABLE COLOR:
WHI
BLK
WHI/BLK
SLV GRY/BLK

IP20/ROHS/CE/▽

Ø127xH130



DANNY S
-23W LED 1x23W


MATERIAL: Alu die-cast +Steel
ADJUSTABLE ANGLE: 0~80°/350°

LAMP: BRIDGELUX VERO 13
1x16.2/23.4W-500mA/700mA
1910~2540lm/CRI80/3000K,
1480~1969lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 500mA-700mA-DC
REFLECTOR ANGLE: 16°, 34°, 50°.CRI 80/90.

AVAILABLE COLOR:
WHI
BLK
WHI/BLK
SLV GRY/BLK

IP20/ROHS/CE/▽

Ø127xH130



Silver
RING-83S



Black
RING-83B



Gold
RING-83G




Honeycomb-70



Linear Spread-70



Softening Lens-70




Spread Lens-70

CEILING
RECESSED




UNIVERSAL RD

MATERIAL: ALU DIE-CAST ADJUSTABLE ANGLE: 0~90°/350°
 AVAILABLE COLOR: Sand White, Sand Black, Sand White/Black, Chrome, Champagne
 IP20/ROHS/CE/LED



MODEL NO.	POWER (W)	DRIVER(EXCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP (BRIDGELUX)	REFLECTOR ANGLE	INCL. MOUNTING KIT
UNIVERSAL RD	1x9.2W	500mA	945	739	V8 Array	17°, 32°, 48°	/
UNIVERSAL RD-14W	1x13.8W	500mA	1354	1074	V10 Array	20°, 35°, 52°	/
UNIVERSAL RD HIDE	1x9.2W	500mA	945	739	V8 Array	17°, 32°, 48°	INCL. MOUNTING KIT 15
UNIVERSAL RD HIDE-14W	1x13.8W	500mA	1354	1074	V10 Array	20°, 35°, 52°	INCL. MOUNTING KIT 15



CEILING
RECESSED






KEVIN-6W LED 1x6W



MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:18°
LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA,
703lm /CRI80/3000K,550lm /CRI90/3000K,
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:23°, 34°, 50°.
CRI 80/90.

AVAILABLE COLOR:
BLK
WHI
SLV GRY
IP20/ROHS/CE/▽

Ø76xH98




KEVIN-9W LED 1x9W



MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:18°
LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm /CRI80/3000K,739lm /CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°.
CRI 80/90

AVAILABLE COLOR:
BLK
WHI
SLV GRY
IP20/ROHS/CE/▽

Ø76xH118




KEVIN-MR16 MR16 1x50W



MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°
LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
BLK
WHI
SLV GRY
IP20/ROHS/CE/▽

Ø76xH135




KEVIN-GU10 GU10 1x50W



MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°
LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
BLK
WHI
SLV GRY
IP20/ROHS/CE/▽

Ø76xH135




JANE OK-6W LED 1x6W



MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~18°
LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA,
703lm /CRI80/3000K,550lm /CRI90/3000K,
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:23°, 34°, 50°.
CRI 80/90.

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK
IP20/ROHS/CE/▽

Ø76xH98




JANE OK-9W LED 1x9W



MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~18°
LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm /CRI80/3000K,739lm /CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°.
CRI 80/90

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK
IP20/ROHS/CE/▽

Ø76xH118




JANE OK-MR16 MR16 1x50W



MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°
LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK
IP20/ROHS/CE/▽

Ø76xH135




JANE OK-GU10 GU10 1x50W



MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°
LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK
IP20/ROHS/CE/▽

Ø76xH135




X-EVA-9W LED 1x9W



MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:18°
LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm /CRI80/3000K,739lm /CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°.
CRI 80/90.

AVAILABLE COLOR:
WHI
BLK
SLV GRY
IP20/ROHS/CE/▽

Ø83xH130




X-EVA HIDE-9W LED 1x9W



MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:18°
LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,
945lm /CRI80/3000K,739lm /CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°.
CRI 80/90.
INCL MOUNTING KIT 5

AVAILABLE COLOR:
WHI
BLK
SLV GRY
IP20/ROHS/CE/▽

KIT 5 H130




X-EVA-MR16 MR16 1x50W



MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°/355°
LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WHI
BLK
SLV GRY
IP20/ROHS/CE/▽

Ø83xH160




X-EVA-GU10 GU10 1x50W



MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°/355°
LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WHI
BLK
SLV GRY
IP20/ROHS/CE/▽

Ø83xH160




X-EVA HIDE-MR16 MR16 1x50W



MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°/355°
LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO
INCL MOUNTING KIT 5

AVAILABLE COLOR:
WHI
BLK
SLV GRY
IP20/ROHS/CE/▽

KITxH130




X-EVA HIDE-GU10 GU10 1x50W



MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°/355°
LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz
INCL MOUNTING KIT 5

AVAILABLE COLOR:
WHI
BLK
SLV GRY
IP20/ROHS/CE/▽

KITxH160





MIKE-9W LED 1x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:18°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°.
CRI 80/90.

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK

IP20/ROHS/CE/

86x86 H136



MIKE HIDE-9W LED 1x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:18°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
945lm/CRI80/3000K,739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°.
CRI 80/90.
INCL. MOUNTING KIT 1

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK


IP20/ROHS/CE/

KIT 1 H136



MOUNTING KIT 1
MATERIAL:ALU DIE-CAST

110x110 H140



MIKE-MR16 MR16 1x 50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK

IP20/ROHS/CE/

86x86 H145



MIKE -GU10 GU10 1x 50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°

LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK

IP20/ROHS/CE/

86x86 H145



MIKE HIDE-MR16 MR16 1x 50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO
INCL. MOUNTING KIT 1

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK

IP20/ROHS/CE/

KIT 1 H125



MIKE HIDE -GU10 GU10 1x 50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°

LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz
INCL. MOUNTING KIT 1

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK

IP20/ROHS/CE/

KIT 1 H145



MIKE 2-9W LED 2x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:18°

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA
2x945lm/CRI80/3000K,2x739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°.
CRI 80/90.

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK

IP20/ROHS/CE/

168x86 H136



MIKE 2 HIDE-9W LED 2x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:18°

LAMP:BRIDGELUX V8 ARRAY 2x9.2W/500mA
2x945lm/CRI80/3000K,2x739lm/CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:23°, 34°, 50°.
CRI 80/90.
INCL. MOUNTING KIT 2

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK


IP20/ROHS/CE/

KIT 2 H136



MOUNTING KIT 2
MATERIAL:ALU DIE-CAST

191x110 H140



MIKE-MR16 MR16 2x 50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°

LAMP:2xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK

IP20/ROHS/CE/

168x86 H160



MIKE -GU10 GU10 2x 50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°

LAMP:2xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK

IP20/ROHS/CE/

168x86 H160



MIKE HIDE-MR16 MR16 2x 50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°

LAMP:2xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO
INCL. MOUNTING KIT 2

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK

IP20/ROHS/CE/

KIT 2 H125



MIKE HIDE -GU10 GU10 2x 50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~18°

LAMP:2xGU10 MAX.50W
GU10 220-240V/50-60Hz
INCL. MOUNTING KIT 2

AVAILABLE COLOR:
BLK
WHI/BLK
SLV GRY/BLK
WHI+BLK/BLK

IP20/ROHS/CE/

KIT 2 H145








FAST

FAST, the idea comes from two concepts:

1. More and more customers desire to have bathroom luminaire of exquisite and fashion design.
2. Customers prefer to have multi-style products while paying the same amount of money.

FAST is a waterproof product which can meet these two requirements. It offers "TOP MINI", "TOP MINI SQ" and "BOBO" three styles of IP44 waterproof frames for customers' quickly and freely matching. Based on this character, customers can separately purchase the lamp and different frames, makes the best use of money.

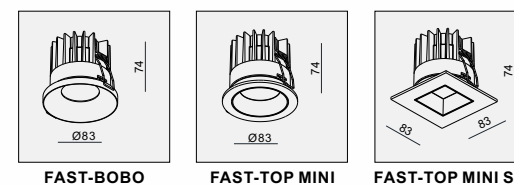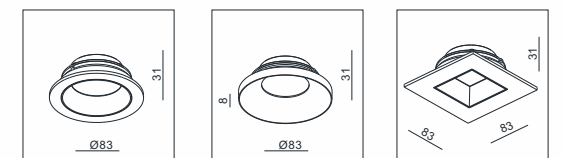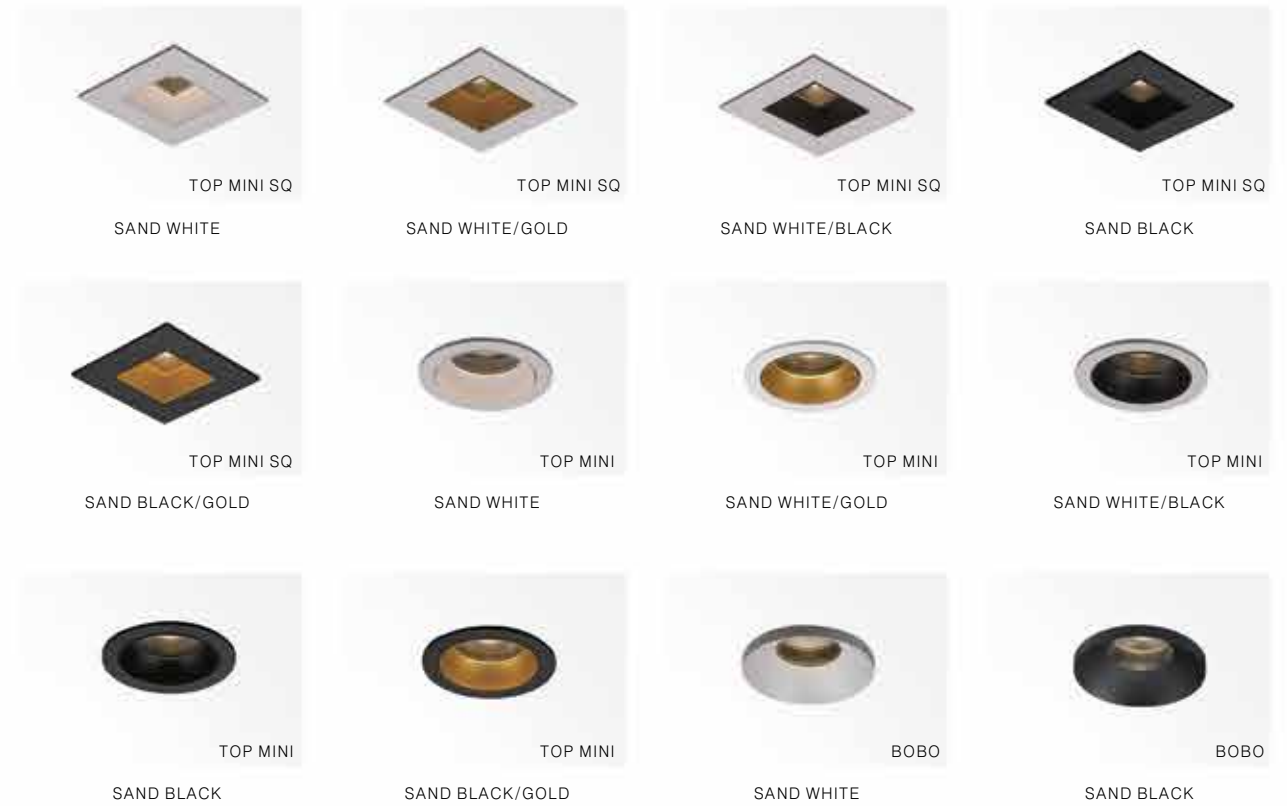


MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA,◇
945lm /CRI80/3000K,739lm /CRI90/3000K,
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:Black

⊙ 68 H88

IP44/ROHS/CE/▽



LAMP FOR FAST
LED 1x9W

CEILING
RECESSED



FOCUS COLD RD


FOCUS COLD RD LED 5x2~3W

MATERIAL:ALU DIE-CAST+ ALU+PC
ADJUSTABLE ANGLE:0~90°/355°

LAMP:OSLON Square EC 5X2~3W/700~1000mA
1120~1512lm/CRI80,870~1175lm/CRI90
EXCL.LED POWER SUPPLY 700~1000mA-DC
REFLECTOR ANGLE:32°, 46°.CRI 80/90.


AVAILABLE COLOR:Sand White, Sand Black

IP20/ROHS/CE/LED Ø51xH70



FOCUS COLD RD + **MOUNTING KIT 18** = **FOCUS COLD HIDE**

MOUNTING KIT 18
MATERIAL:ALUMINUM



Black
RASTER 5 B



Silver
RASTER 5 S

CEILING
RECESSED

X-HALO

X-HALO range is different with HALO.
It has a round light with different color on the ceiling but keeping good lighting quality.

X-HALO -9W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V8 Array, 1x9.2W
EVERLIGHT SMD, 15x0.1W 3000K/4000K/5600K
945lm/3000K/CRI 80, 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:Sand White, Sand Black

IP20/ROHS/CE/LED


Ø83xH109




**CEILING
RECESSED**



**CEILING
RECESSED**

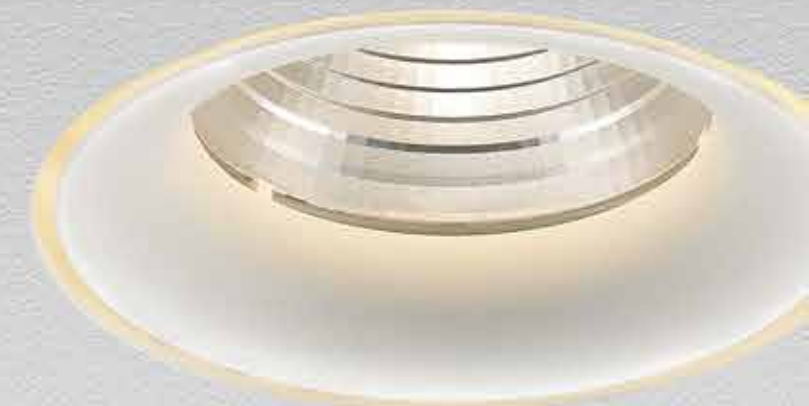

HALO range is a continuously hot sell product. When lighting on, there will be a round circle light on the surface. Its fashion design is not only for lighting but also decorated atmosphere. HALO range can be 5W, 10W, 17W and 24W, also with three different sizes for options. Moreover, there are recessed design and trimless design for choices.

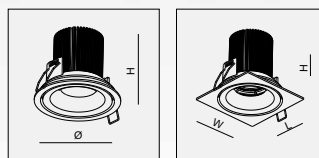

MATERIAL:ALU DIE-CAST + ALU ADJUSTABLE ANGLE:FIXED
AVAILABLE COLOR:Sand White, Sand Black IP40/ROHS/CE/◇/▽

MODEL NO.	POWER (W)	DRIVER(EXCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP (BRIDGELUX)	REFLECTOR ANGLE	SIZE(mm)	CUT-OUT
HALO MINI-7W	1x6.8W	700mA	609	528	V6 Array	30°, 48°	Ø75xH46	Ø68xH65
HALO-9W	1x9.2W	500mA	945	739	V8 Array	32°, 48°	Ø100xH89	Ø92xH109
HALO-24W	1x16.8~24.2W	500~700mA	2540	1969	VERO13 Array	38°, 60°	Ø140xH70	Ø127xH100
HALO 1 MINI-7W	1x6.8W	700mA	609	528	V6 Array	30°, 48°	W75xL75xH46	Ø68xH65
HALO 1-9W	1x9.2W	500mA	945	739	V8 Array	32°, 48°	W100xL100xH89	Ø92xH109
HALO 1-24W	1x16.8~24.2W	500~700mA	2540	1969	VERO13 Array	38°, 60°	W140xL140xH70	Ø127xH100

MOUNTING KIT 7
MATERIAL:ALU+STEEL

Ø89 H80

MOUNTING KIT 5
MATERIAL:ALU+STEEL

Ø114 H109

MOUNTING KIT 6
MATERIAL:ALU+STEEL

Ø152 H100

MATERIAL:ALU DIE-CAST + ALU ADJUSTABLE ANGLE:FIXED
AVAILABLE COLOR:Sand White, Sand Black IP40/ROHS/CE/◇/▽

MODEL NO.	POWER (W)	DRIVER(EXCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP (BRIDGELUX)	REFLECTOR ANGLE	SIZE(mm)	INCL MOUNTING KIT
HALO MINI HIDE-7W	1x6.8W	700mA	609	528	V6 Array	30°, 48°	Ø62xH55	INCL MOUNTING KIT 7
HALO HIDE-9W	1x9.2W	500mA	945	739	V8 Array	32°, 48°	Ø86xH89	INCL MOUNTING KIT 5
HALO HIDE-24W	1x16.2~23.4W	500~700mA	1910~2540	1480~1969	VERO13	38°, 60°	Ø122xH70	INCL MOUNTING KIT 6



HALO OK LED 1x9W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~45°/355°

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/

Ø98xH75



HALO 1 OK LED 1x9W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~45°/355°

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/

Ø98xH75



HALO x2 OK LED 2x9W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~45°/355°

LAMP:BRIDGELUX V8 Array 2x 9.2W
2x945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/

Ø98, L-103 H75



HALO 2 OK LED 2x9W



MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~45°/355°

LAMP:BRIDGELUX V8 Array 2x 9.2W
2x945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.


AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/

Ø98, L-103 H75

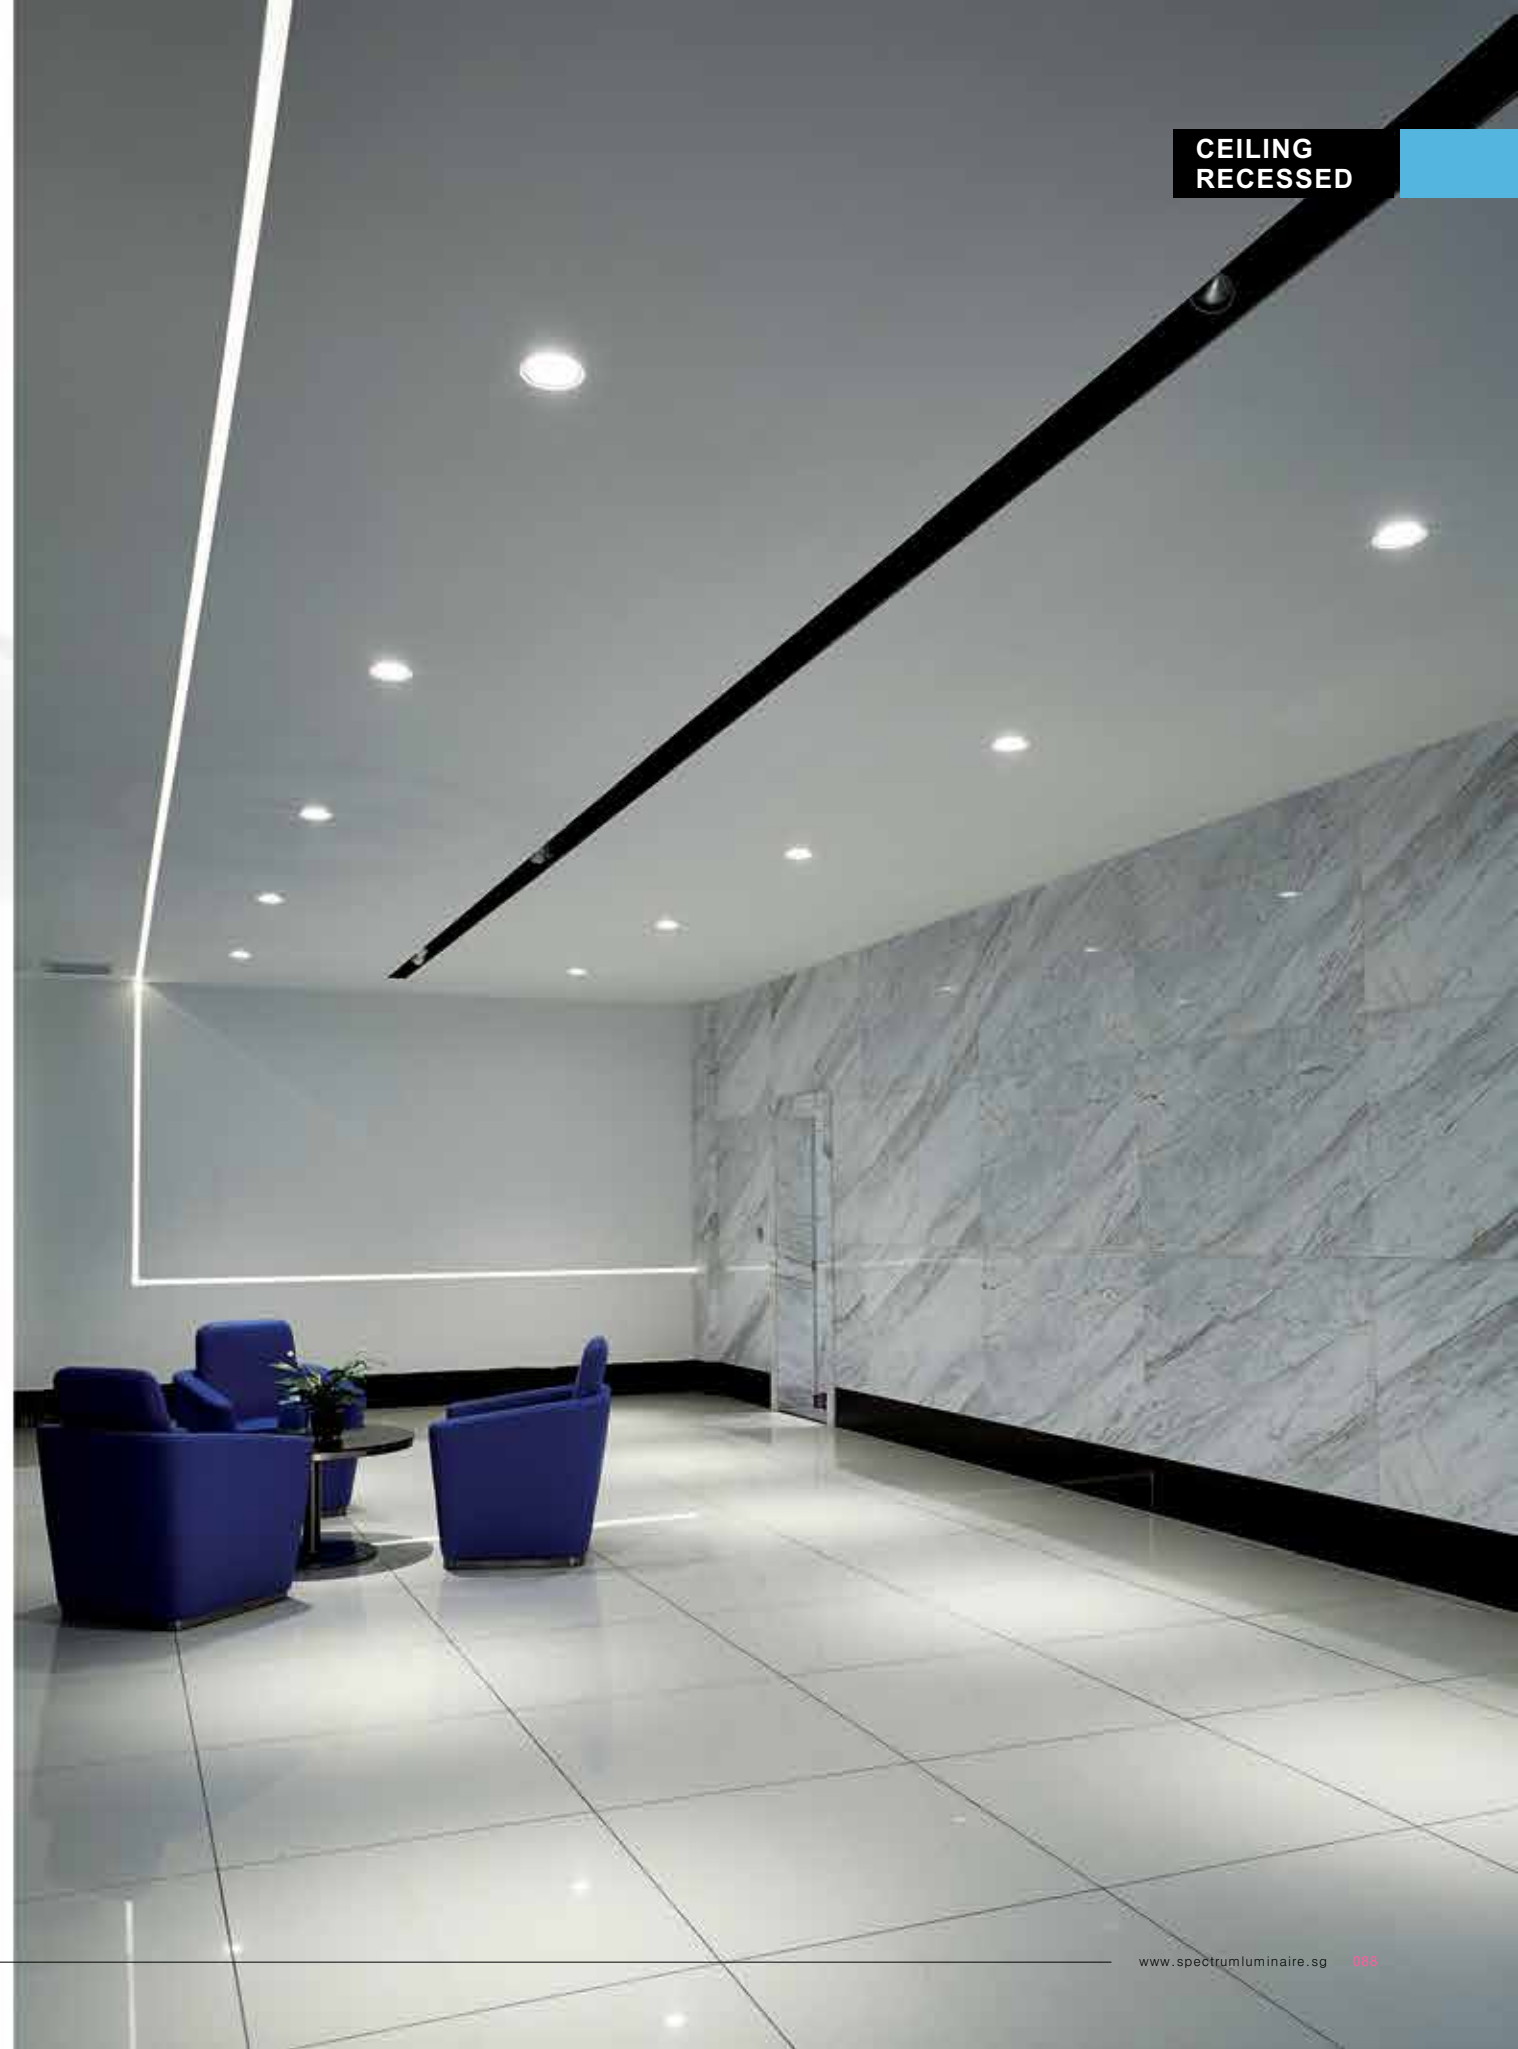

CEILING
RECESSED

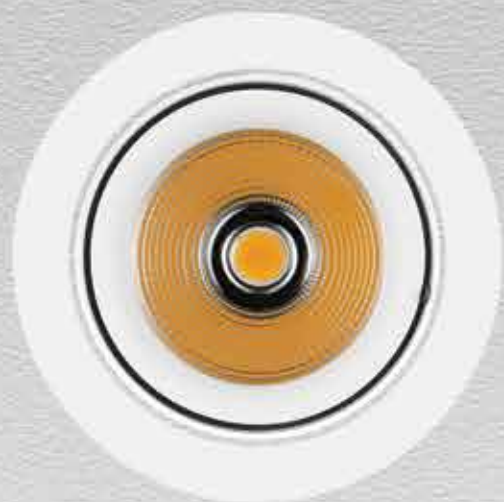

CEILING
RECESSED



DE-20 SERIES



DE-20 series with curved design, it is an attractive product.
DE-20 series have been hot sell since 2012 and developed bigger size in 2013 to meet customer's requirements.
BRIDGELUX LED with 600LM~4500LM. It can widely used in commercial and family.



DE-200 F-5W LED 1x5W




MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE::FIXED

LAMP:BRIDGELUX V6 Array 1x 6.8W
609lm/3000K/CRI 80 528lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:30°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Chrome

IP40/ROHS/CE/

Ø50xH65



DE-200 FIX-9W LED 1x9W





MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Chrome

IP54/ROHS/CE/

Ø68xH70



DE-200 FIX M-9W LED 1x9W




MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP54/ROHS/CE/

Ø83xH70



DE-200 FIX-24W LED 1x24W




MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX VERO13 24.2W
2540lm/3000K/CRI 80 1969lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:38°, 60°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP54/ROHS/CE/

Ø114xH100





DE-200-6W LED 1x6W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98xH97



DE-200-9W LED 1x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98xH117



DE-200 MR16 1x50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~30°/355°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98xH140



DE-200-GU10 GU10 1x50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~30°/355°

LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98xH140



DE-201-6W LED 1x6W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98xH97



DE-201-9W LED 1x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98xH117



DE-201 MR16 1x50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~30°/355°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98xH140



DE-201-GU10 GU10 1x50W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:0~30°/355°

LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98xH140



DE-200x2-6W LED 2x6W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V8 Array 2x 6.2W
2x703lm/3000K/CRI 80 2x550lm/3000K/
CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98, L-103 H97



DE-200x2-9W LED 2x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V8 Array 2x 9.2W
2x945lm/3000K/CRI 80 739lm/3000K/
CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98, L-103 H117



DE-200x2 MR16 1x50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:2xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98, L-103 H140



DE-200x2-GU10 GU10 1x50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:2xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98, L-103 H140



DE-202-6W LED 2x6W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V8 Array 2x 6.2W
2x703lm/3000K/CRI 80 2x550lm/3000K/
CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98, L-103 H97



DE-202-9W LED 2x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V8 Array 2x 9.2W
2x945lm/3000K/CRI 80 739lm/3000K/
CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98, L-103 H117



DE-202 MR16 2x50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:2xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98, L-103 H140



DE-202-GU10 GU10 2x50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:2xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø98, L-103 H140






DE-200 MIDI-20W LED 1X20W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V10 ARRAY. 1x20.3W
1939lm/3000K/CRI80 1535lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90.

AVAILABLE COLOR:
WH/BK
BK/BK



IP20/ROHS/CE/

Ø121xH82




DE-200 MIDI QR70 1X50W

MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:0~30°/355°

LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black



IP20/ROHS/CE/

Ø121xH145




DE-201 MIDI-20W LED 1X20W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V10 ARRAY. 1x20.3W
1939lm/3000K/CRI80 1535lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90.

AVAILABLE COLOR:
WH/BK
BK/BK



IP20/ROHS/CE/

Ø121xH82




DE-201 MIDI QR70 1x50W

MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:0~30°/355°

LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black



IP20/ROHS/CE/

Ø121xH145




DE-200x2 MIDI-20W LED 2X20W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V10 ARRAY. 2x20.3W
2x1939lm/3000K/CRI80 2x1535lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90.

AVAILABLE COLOR:
WH/BK
BK/BK



IP20/ROHS/CE/

Ø121,L-128 H82




DE-200x2 MIDI QR70 2X50W

MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:0~30°/355°

LAMP:2xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black



IP20/ROHS/CE/

Ø121,L-128 H145




DE-202 MIDI-20W LED 2X20W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V10 ARRAY. 2x20.3W
2x1939lm/3000K/CRI80 2x1535lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90.

AVAILABLE COLOR:
WH/BK
BK/BK



IP20/ROHS/CE/

Ø121,L-128 H82




DE-202 MIDI QR70 2x50W

MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:0~30°/355°

LAMP:2xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black



IP20/ROHS/CE/

Ø121,L-128 H145






DE-200M-31W LED 1x31W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO 18 ARRAY . 1x31W
3662lm/3000K/CRI80 2842lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø160xH110




DE-200M-42W LED 1x42W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO18 42.3W
4664lm/3000K/CRI 80 3620lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1400mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø160xH130



DE-200M QR111 1x50W


DE-200M CDM-R111 1x70W

MATERIAL:ALU DIE-CAST + STEEL
ADJUSTABLE ANGLE:0~36°/350°
LAMP:1xQR111 MAX.50W
G53/12V EXCL.TRANSFO
LAMP:1xCDM-R111 MAX.70W
GX10/220-240V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø160xH140




DE-200M-G8.5 G8.5 1x70W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~36°/350°
LAMP:1xCDM-TC MAX.70W
REFLECTOR ANGLE:10°, 26°, 40°, 32x55°
G8.5/220-240V EXCL.BALLAST

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø160xH160




DE-201M-31W LED 1x31W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO 18 ARRAY . 1x31W
3662lm/3000K/CRI80 2842lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø160xH110




DE-201M-42W LED 1x42W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO18 42.3W
4664lm/3000K/CRI 80 3620lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1400mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø160xH130



DE-201M QR111 1x50W


DE-201M CDM-R111 1x70W

MATERIAL:ALU DIE-CAST + STEEL
ADJUSTABLE ANGLE:0~36°/350°
LAMP:1xQR111 MAX.50W
G53/12V EXCL.TRANSFO
LAMP:1xCDM-R111 MAX.70W
GX10/220-240V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø160xH140




DE-201M-G8.5 G8.5 1x70W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~36°/350°
LAMP:1xCDM-TC MAX.70W
REFLECTOR ANGLE:10°, 26°, 40°, 32x55°
G8.5/220-240V EXCL.BALLAST

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø160xH160




DE-200x2M-31W LED 2x31W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO 18 ARRAY . 2x31W
2x3662lm/3000K/CRI80 2x2842lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø158, L-166 H100




DE-200x2M-42W LED 2x42W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO18 2x42.3W
2x4664lm/3000K/CRI 80 2x3620lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1400mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø158, L-166 H130



DE-200x2M QR111 2x50W


DE-200x2M CDM-R111 2x70W

MATERIAL:ALU DIE-CAST + STEEL
ADJUSTABLE ANGLE:0~36°/350°
LAMP:2xQR111 MAX.50W
G53/12V EXCL.TRANSFO
LAMP:2xCDM-R111 MAX.70W
GX10/220-240V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø158, L-166 H140




DE-200x2M-G8.5 G8.5 2x70W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~36°/350°
LAMP:2xCDM-TC MAX.70W
REFLECTOR ANGLE:10°, 26°, 40°, 32x55°
G8.5/220-240V EXCL.BALLAST

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø158, L-166 H160




DE-202M-31W LED 2x31W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO 18 ARRAY . 2x31W
2x3662lm/3000K/CRI80 2x2842lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø158, L-166 H100




DE-202M-42W LED 2x42W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO18 2x42.3W
2x4664lm/3000K/CRI 80 2x3620lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1400mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø158, L-166 H130



DE-202M QR111 2x50W


DE-202M CDM-R111 2x70W

MATERIAL:ALU DIE-CAST + STEEL
ADJUSTABLE ANGLE:0~36°/350°
LAMP:2xQR111 MAX.50W
G53/12V EXCL.TRANSFO
LAMP:2xCDM-R111 MAX.70W
GX10/220-240V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø158, L-166 H140




DE-202M-G8.5 G8.5 2x70W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~36°/350°
LAMP:2xCDM-TC MAX.70W
REFLECTOR ANGLE:10°, 26°, 40°, 32x55°
G8.5/220-240V EXCL.BALLAST

AVAILABLE COLOR:
Sand White
Sand Black

IP20/ROHS/CE/▽

Ø158, L-166 H160



CEILING
RECESSED



CEILING
RECESSED



ON-20 SERIES

ON-20 series with curved adjustable ring. It not only has an attractive design but also can anti-glare.
ON-20 series has big, middle and small size to meet different height ceiling.
BRIDGELUX LED with 900LM~4000LM. It can widely used in commercial and family.



ON-201-9W LED 1x9W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~22°/355°

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK

IP20/ROHS/CE/

100x100 H116



ON-201 MR16 1x50W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK

IP20/ROHS/CE/

100x100 H135



ON-201-9W LED 2x9W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~22°/355°

LAMP:BRIDGELUX V8 Array 2x 9.2W
2x945lm/3000K/CRI 80 2x739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK

IP20/ROHS/CE/

180x100 H116



ON-202 MR16 2x50W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:2xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK

IP20/ROHS/CE/

180x100 H135



ON-201 MIDI-20W LED 1x20W




MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V10 ARRAY, 1x20.3W
1939lm/3000K/CRI80 1535lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90.

AVAILABLE COLOR:
WH/BK
BK/BK

IP20/ROHS/CE/

122x122 H116



ON-201 MIDI QR70 1x50W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~45°/355°

LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK

IP20/ROHS/CE/

122x122 H125



ON-202 MIDI-20W LED 2x20W




MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V10 ARRAY, 2x20.3W
2x1939lm/3000K/CRI80 2x1535lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90.

AVAILABLE COLOR:
WH/BK
BK/BK

IP20/ROHS/CE/

230x122 H116



ON-202 MIDI QR70 2x50W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~45°/355°

LAMP:2xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK

IP20/ROHS/CE/

230x122 H125






ON-201 M-31W LED 1x31W

MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX VERO 18 ARRAY . 1x31W
3662lm/3000K/CRI80 2842lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK



IP20/ROHS/CE/


152x152 H160

ON-201 M-36W LED 1x36W

MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX VERO18 35.6W
4211lm/3000K/CRI 80 3268lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1200mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK



IP20/ROHS/CE/

152x152 H160




ON-201 M-QR111 QR111 1x50W

MATERIAL:ALU DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~40°/350°

LAMP:1xQR111 MAX.100W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK



IP20/ROHS/CE/


152x152x140H

ON-201 M-G8.5 CTM-TC 1x70W

MATERIAL:ALU DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xCDM-TC MAX.70W
REFLECTOR ANGLE:10°, 26°, 40°, 32x55°
G8.5/220-240V EXCL.BALLAST

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK



IP20/ROHS/CE/

152x152x160H




ON-202 M-31W LED 2x31W

MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX VERO 18 ARRAY . 2x31W
2x3662lm/3000K/CRI80 2x2842lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK



IP20/ROHS/CE/


298x152 H160

ON-202 M-36W LED 2x36W

MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX VERO18 2x35.6W
2x4211lm/3000K/CRI 80 2x3268lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1200mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK



IP20/ROHS/CE/

298x152 H160




ON-202 M-QR111 QR111 2x50W

MATERIAL:ALU DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~45°/350°

LAMP:2xQR111 MAX.2x100W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK



IP20/ROHS/CE/


298x152x140H

ON-202 M-G8.5 CTM-TC 2x70W

MATERIAL:ALU DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~30°/350°

LAMP:2xCDM-TC MAX.70W
REFLECTOR ANGLE:10°, 26°, 40°, 32x55°
G8.5/220-240V EXCL.BALLAST

AVAILABLE COLOR:
WH/WH
WH/BK
BK/BK



IP20/ROHS/CE/

298x152 H160



CEILING
RECESSED

CEILING
RECESSED

HIDE-20 SERIES

HIDE-20 series is trimless design. It can be well combined with ceiling after installation.
HIDE-20 series with curved adjustable ring. It not only has an attractive design but also can anti-glare.
HIDE-20 has big, middle and small size to meet different height ceiling.
BRIDGELUX LED with 900LM~4000LM. It can widely used in commercial and family.





HIDE-201-9W LED 1x9W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~22°/355°

LAMP:BRIDGELUX V8 Array 1x9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.
INCL MOUNTING KIT 3


AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH

IP20/ROHS/CE/▽
KIT 1 H116



MOUNTING KIT 3

MATERIAL:STEEL



100x100 H116



HIDE-201 MR16 1x50W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO
INCL MOUNTING KIT 3

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH

IP20/ROHS/CE/▽
KIT 3 H135



HIDE-201 MIDI-20W LED 1x20W




MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V10 ARRAY. 1x20.3W
1939lm/3000K/CRI80 1535lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90.

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH

IP20/ROHS/CE/▽

116x116 H116



HIDE-201 MIDI QR70 1x50W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~45°/355°

LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH

IP20/ROHS/CE/▽

116x116 H125



HIDE-202-9W LED 2x9W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~35°/355°

LAMP:BRIDGELUX V8 Array 2x9.2W
2x945lm/3000K/CRI 80 2x739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.
INCL MOUNTING KIT 4


AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH

IP20/ROHS/CE/▽
KIT 4 H116



MOUNTING KIT 4

MATERIAL:STEEL



185x100 H116



HIDE-202 MR16 2x50W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:2xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO
INCL MOUNTING KIT 4

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH

IP20/ROHS/CE/▽
KIT 2 H135



HIDE-202 MIDI-20W LED 2x20W




MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°

LAMP:BRIDGELUX V10 ARRAY. 2x20.3W
2x1939lm/3000K/CRI80 2x1535lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 35°, 52°.CRI 80/90.

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH

IP20/ROHS/CE/▽

230x116 H116



HIDE-202 MIDI QR70 2x50W




MATERIAL:ALU DIE-CAST + ALU + STEEL
ADJUSTABLE ANGLE:0~45°/355°

LAMP:2xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH

IP20/ROHS/CE/▽

230x116 H125






HIDE-201M-31W LED 1x31W

MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°
LLAMP:BRIDGELUX VERO 18 ARRAY . 1x31W
3662lm/3000K/CRI80 2842lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH




IP20/ROHS/CE/▽

150x150 H160

HIDE-201M-36W LED 1x36W

MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO18 1x35.6W
4211lm/3000K/CRI 80 3268lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1200mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH



IP20/ROHS/CE/▽


150x150 H160



HIDE-201M QR111 1x100W

MATERIAL:ALU DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~40°/350°
LAMP:1xQR111 MAX.100W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH




IP20/ROHS/CE/▽

150x150x135H

HIDE-201M-G8.5 G8.5 1x70W

MATERIAL:ALU DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~30°/350°
LAMP:1xCDM-TC MAX.70W
REFLECTOR ANGLE:10°, 26°, 40°, 32x55°
G8.5/220-240V EXCL.BALLAST

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH



IP20/ROHS/CE/▽


150x150x135H



HIDE-202M-31W LED 2x31W

MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO 18 ARRAY . 2x31W
2x3662lm/3000K/CRI80 2x2842lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH




IP20/ROHS/CE/▽

298x150 H160

HIDE-202M-42W LED 2x42W

MATERIAL:ALUMINUM+STEEL
ADJUSTABLE ANGLE:0~30°/355°
LAMP:BRIDGELUX VERO18 2x35.6W
2x4211lm/3000K/CRI 80 2x3268lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1200mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH



IP20/ROHS/CE/▽


298x150 H160



HIDE-202M QR111 2x100W

MATERIAL:ALU DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~45°/350°
LAMP:2xQR111 MAX.2x100W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH




IP20/ROHS/CE/▽

298x150x135H

HIDE-202M-G8.5 G8.5 2x70W

MATERIAL:ALU DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~30°/350°
LAMP:2xCDM-TC MAX.70W
REFLECTOR ANGLE:10°, 26°, 40°, 32x55°
G8.5/220-240V EXCL.BALLAST

AVAILABLE COLOR:
BK/WH
BK/BK
WH/WH



IP20/ROHS/CE/▽


298x150x160H



HIDE-20 M



GD-1X4 SERIES

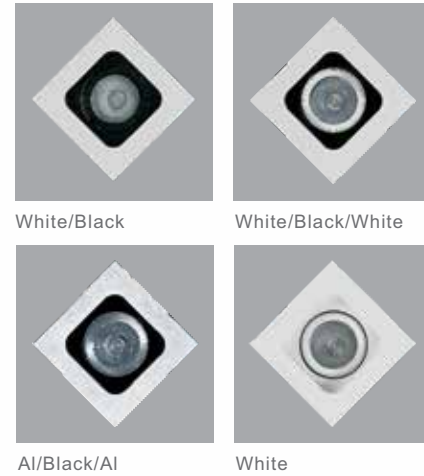

- ①The major parts are made by pure aluminum and treated by CNC lathe machine accurately. It is popular and easily installation.
- ②Different product size for MR16, AR70, QR111 and COB LED etc...




GDE-1641-6W LED 1x6W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~28°/350°
LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH, WH/BK/BK
AL/BK/AL, AL/BK/BK
WH/WH/WH, BK/BK/BK

IP20/ROHS/CE/▽
Ø89xH115




GDE-1641-9W LED 1x9W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~28°/350°
LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH, WH/BK/BK
AL/BK/AL, AL/BK/BK
WH/WH/WH, BK/BK/BK

IP20/ROHS/CE/▽
Ø89xH135




GD-1641 MR16 1x50W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~28°/350°
LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK/WH, WH/BK/BK
AL/BK/AL, AL/BK/BK
WH/WH/WH, BK/BK/BK

IP20/ROHS/CE/▽
Ø89xH150




GD-1641 GU10 1x50W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~28°/350°
LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK/WH, WH/BK/BK
AL/BK/AL, AL/BK/BK
WH/WH/WH, BK/BK/BK

IP20/ROHS/CE/▽
Ø89xH150




GDE-1642-6W LED 2x6W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~28°/350°
LAMP:BRIDGELUX V8 Array 1x 6.2W
2x703lm/3000K/CRI 80 2x550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH, WH/BK/BK
AL/BK/AL, AL/BK/BK
WH/WH/WH, BK/BK/BK

IP20/ROHS/CE/▽
188x85 H115




GDE-1642-9W LED 2x9W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~28°/350°
LAMP:BRIDGELUX V8 Array 2x 9.2W
2x945lm/3000K/CRI 80 2x739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH, WH/BK/BK
AL/BK/AL, AL/BK/BK
WH/WH/WH, BK/BK/BK

IP20/ROHS/CE/▽
188x85 H135




GD-1642 MR16 2x50W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/350°
LAMP:2xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK/WH, WH/BK/BK
AL/BK/AL, AL/BK/BK
WH/WH/WH, BK/BK/BK

IP20/ROHS/CE/▽
188x85 H150




GD-1642 GU10 2x50W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/350°
LAMP:2xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK/WH, WH/BK/BK
AL/BK/AL, AL/BK/BK
WH/WH/WH, BK/BK/BK

IP20/ROHS/CE/▽
188x85 H150





GDE-1741-14W LED 1x14W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~21°/350°

LAMP:BRIDGELUX V10 ARRAY . 1x13.8W
1474lm/3000K/CRI80 1167lm/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

Ø114xH140



GDE-1741-20W LED 1x20W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~21°/350°

LAMP:BRIDGELUX V10 ARRAY . 1x20.1W
1939lm/3000K/CRI80 1535lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

Ø114xH160



GD-1741 QR70 1x50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~21°/350°

LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

Ø114xH150



GD-1741 PAR20 1x50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~21°/350°

LAMP:1xPAR20 MAX.50W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

Ø114xH150



GDE-1742-14W LED 2x14W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~21°/350°

LAMP:BRIDGELUX V10 ARRAY . 2x13.8W
2x1474lm/3000K/CRI80 2x1167lm/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

220X110 H140



GDE-1742-20W LED 2x20W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~21°/350°

LAMP:BRIDGELUX V10 ARRAY . 2x20.1W
2x1939lm/3000K/CRI80 2x1535lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

220X110 H160



GD-1742 QR70 2x50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~21°/350°

LAMP:2xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

220X110 H150
220X110 H150



GD-1742 PAR20 2x50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~21°/350°

LAMP:2xPAR20 MAX.50W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

220X110 H150
220X110 H150



GDE-1941-31W LED 1x31W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX VERO 18 ARRAY . 1x30.6W
3050lm/3000K/CRI80 2470lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

Ø180xH150



GDE-1941-36W LED 1x36W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX VERO 18 ARRAY . 1x35.5W
3500lm/3000K/CRI80 2840lm/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

Ø180xH165



GD-1941 QR111 1x50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xQR111 MAX.50W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

Ø180xH160



GD-1941 PAR30 1x75W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xPAR30 MAX.75W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

Ø180xH160



GDE-1942-31W LED 2x31W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX VERO 18 ARRAY . 2x30.6W
3050lmx2/3000K/CRI80 2470lmx2/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

335x165 H150



GDE-1942-36W LED 2x36W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX VERO 18 ARRAY . 2x35.5W
3500lmx2/3000K/CRI80 2840lmx2/3000K/CRI90
EXCL.LED POWER SUPPLY 1050mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

335x165 H165



GD-1942 QR111 2x50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/350°

LAMP:2xQR111 MAX.50W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

335x165 H160



GD-1942 PAR30 2x75W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~30°/350°

LAMP:2xPAR30 MAX.75W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK/WH
AL/BK/AL
WH/BK
WH/WH/WH

IP20/ROHS/CE/▽

335x165 H160





DE-260-6W LED 1x6W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°

LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK

IP20/ROHS/CE/▽

Ø80xH95



DE-260-9W LED 1x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK

IP20/ROHS/CE/▽

Ø80xH115



DE-260 MR16 1x 50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK

IP20/ROHS/CE/▽

Ø80xH95



DE-260-GU10 GU10 1x 50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°

LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK

IP20/ROHS/CE/▽

Ø80xH115



DE-261-6W LED 1x6W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°

LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK

IP20/ROHS/CE/▽

80x80 H95



DE-261-9W LED 1x9W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK

IP20/ROHS/CE/▽

80x80 H115



DE-261 MR16 1x 50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK

IP20/ROHS/CE/▽

80x80xH95



DE-261-GU10 GU10 1x 50W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°

LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK

IP20/ROHS/CE/▽

80x80xH115






DE-260 MIDI-14W LED 1x 14W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:BRIDGELUX V10 ARRAY . 1x13.8W
1340lm/3000K/CRI80 1135lm/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
Ø98xH135



DE-260 MIDI-20W LED 1x 20W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:BRIDGELUX V10 ARRAY . 1x20.1W
1710lm/3000K/CRI80 1455lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
Ø98xH155



DE-260 MIDI QR70 1x 50W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
Ø98xH150



DE-260 MIDI-PAR20 PAR20 1x 50W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:1xPAR20 MAX.50W
E27 220-240V/50-60Hz


AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush
IP20/ROHS/CE/▽
Ø105xH150



DE-261 MIDI-14W LED 1x 14W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:BRIDGELUX V10 ARRAY . 1x13.8W
1340lm/3000K/CRI80 1135lm/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
95x95 H135



DE-261 MIDI-20W LED 1x 20W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:BRIDGELUX V10 ARRAY . 1x20.1W
1710lm/3000K/CRI80 1455lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
95x95 H155



DE-261 MIDI QR70 1x 50W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
95x95 H150



DE-261 MIDI-PAR20 PAR20 1x 50W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:1xPAR20 MAX.50W
E27 220-240V/50-60Hz


AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush
IP20/ROHS/CE/▽
95x95 H150



DE-260M-17W LED 1x 17W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:BRIDGELUX VERO 13 ARRAY . 1x16.8W
1750lm/3000K/CRI80 1310lm/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
Ø146xH150



DE-260M-24W LED 1x 24W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:BRIDGELUX VERO 13 ARRAY . 1x24.2W
2030lm/3000K/CRI80 1680lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
Ø146xH165



DE-260M QR111 1x 50W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:1xQR111 MAX.50W
G53/12V EXCL.TRANSFO



AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
Ø146xH155



DE-260M-PAR30 PAR30 1x 75W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:1xPAR30 MAX.75W
E27 220-240V/50-60Hz


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
Ø146xH155

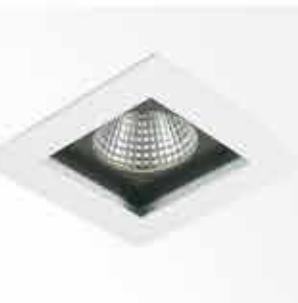

DE-261M-17W LED 1x 17W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:BRIDGELUX VERO 13 ARRAY . 1x16.8W
1750lm/3000K/CRI80 1310lm/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
140x140 H150



DE-261M-24W LED 1x 24W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:BRIDGELUX VERO 13 ARRAY . 1x24.2W
2030lm/3000K/CRI80 1680lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:18°, 28°, 42°.CRI 80/90


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
140x140 H165



DE-261M QR111 1x 50W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:1xQR111 MAX.50W
G53/12V EXCL.TRANSFO


AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
140x140 H155



DE-261M-PAR30 PAR30 1x 75W

MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE:0~20°
LAMP:1xPAR30 MAX.75W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK
WH/WH
BK/BK
IP20/ROHS/CE/▽
140x140 H155





DLE-5X0 SERIES

- ① Simple design, Easy installation, it is a hot sell product for many years.
- ② Different product size for MR16, AR70, QR111, CDM-T, High Power LED and COB LED etc...



DL-5600 MR16 1x50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~28°/350°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø82xH100



DL-5600-GU10 GU10 1x50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~28°/350°

LAMP:1XGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø82xH100



DLE-5600-6W LED 1x6W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~28°/350°

LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø82xH105



DLE-5600-9W LED 1x9W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~28°/350°

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø82xH125



DL-5601 MR16 1x50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~28°/350°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø82xH100



DL-5601-GU10 GU10 1x50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~28°/350°

LAMP:1XGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø82xH100



DLE-5601-6W LED 1x6W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~28°/350°

LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø82xH105



DLE-5601-9W LED 1x9W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~28°/350°

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø82xH125





DL-5602 MR16 2x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:2xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

162x82 H100



DL-5602-GU10 GU10 2x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:2xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

162x82 H100



DLE-5602-6W LED 2x 6W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~28°/350°

LAMP:BRIDGELUX V8 Array 2x 6.2W
2x703lm/3000K/CRI 80 2x550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

162x82 H105



DLE-5602-9W LED 2x 9W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~28°/350°

LAMP:BRIDGELUX V8 Array 2x 9.2W
2x945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

162x82 H125



DL-5700 QR70 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø105xH110



DL-5700-PAR20 PAR20 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xPAR20 MAX.50W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø105xH145



DLE-5700-14W LED 1x 14W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX V10 ARRAY, 1x13.8W
1340lm/3000K/CRI80 1135lm/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø105xH120



DLE-5700-20W LED 1x 20W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX V10 ARRAY, 1x20.1W
1710lm/3000K/CRI80 1455lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø105xH140



DL-5701 QR70 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø105xH110



DL-5701-PAR20 PAR20 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xPAR20 MAX.50W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø105xH145



DLE-5701-14W LED 1x 14W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX V10 ARRAY, 1x13.8W
1340lm/3000K/CRI80 1135lm/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø105xH120



DLE-5701-20W LED 1x 20W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX V10 ARRAY, 1x20.1W
1710lm/3000K/CRI80 1455lm/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø105xH140





DL-5702 QR70 2x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:2xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

225x105 H110



DL-5702-PAR20 PAR20 2x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:2xPAR20 MAX.50W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

225x105 H145



DLE-5702-14W LED 2x 14W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX V10 ARRAY. 2x13.8W
1340lmx2/3000K/CRI80 1135lmx2/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

225x105 H120



DLE-5702-20W LED 2x 20W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX V10 ARRAY. 2x20.1W
1710lmx2/3000K/CRI80 1455lmx2/3000K/CRI90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

225x105 H140



DL-5900 QR111 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xQR111 MAX.50W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø150xH125



DL-5900-PAR30 PAR30 1x 75W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xPAR30 MAX.75W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø150xH130



DL-5901 QR111 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xQR111 MAX.50W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø150xH125



DL-5901-PAR30 PAR30 1x 75W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xPAR30 MAX.75W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø150xH130



DL-5902 QR111 2x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:2xQR111 MAX.50W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

320x150 H125



DL-5902-PAR30 PAR30 2x 75W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:2xPAR30 MAX.75W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

320x150 H130



CEILING
SURFACE

CEILING
SURFACE

DY-1X8 SERIES



DY-1680 MR16 1x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~25°/355°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

Ø90xH165



DY-1680 GU10 1x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~25°/355°

LAMP:1XGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

Ø90xH165



DY-1681 MR16 1x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~25°/355°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

95x95 H165



DY-1681 GU10 1x50W



MATERIAL:ALUMINUM DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~25°/355°

LAMP:1XGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

95x95 H165

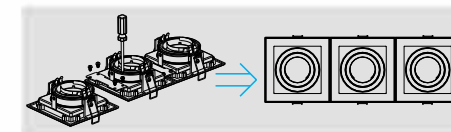

DIY series features:

- 1)The user can assemble the single unit into double unit, triple unit, "L" shape triple unit, quadruple unit easily in a short time.
- 2)Customer can only purchase single unit. In this case, it not only reduce stock but also save the working capital.
- 3)It can assemble flexibly with several different light source. By this matching way, it not only save energy but also highlight the commercial lighting effect.



DY-1780 QR70 1x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~28°/355°

LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

Ø120xH165



DY-1780 PAR20 1x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~28°/355°

LAMP:1xPAR20 MAX.50W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

Ø120xH165



DY-1781 QR70 1x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~28°/355°

LAMP:1xQR70 MAX.50W
BA15D/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

120x120 H165



DY-1781 PAR20 1x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~28°/355°

LAMP:1xPAR20 MAX.50W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

120x120 H165



DY-1980 QR111 1x50W


MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xQR111 MAX.50W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

Ø180xH150



DY-1980 PAR30 1x75W


MATERIAL:ALUMINUM DIE-CAST
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xPAR30 MAX.75W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

Ø180xH150



DY-1981 QR111 1x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xQR111 MAX.50W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

172x172 H150



DY-1981 PAR30 1x75W


MATERIAL:ALUMINUM DIE-CAST+STEEL
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xPAR30 MAX.75W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK
WH/WH

IP20/ROHS/CE/▽

172x172 H150







ALLEN

Minimalist appearance and exact production cost controlling which makes ALLEN series can be good at promotion.

New designed $\phi 35$ reflector, provides a 89% high efficiency output, the light is clean and uniform without any spots. What's more there are three beam angles for options!

Using Bridgelux COB which has strict managements on its color binning. It is guaranteed that color binning within 2sdcm in continuous supply.

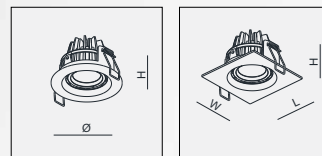

MATERIAL:ALUMINUM DIE-CAST+STEEL ADJUSTABLE ANGLE:0~22°/360° IP40/ROHS/CE/◇/▽

MODEL NO.	POWER (W)	DRIVER(EXCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP (BRIDGELUX)	REFLECTOR ANGLE	SIZE(mm)	CUT-OUT SIZE (mm)
ALLEN	1x6.2W	350mA	703	550	V8 Array	22°, 34°, 50°	Ø80xH52	Ø68xH67
ALLEN-V6	1x6.8W	700mA	609	512	V6 Array	18°, 30°, 48°	Ø80xH52	Ø68xH67
ALLEN 1	1x6.2W	350mA	703	550	V8 Array	22°, 34°, 50°	W80xL80xH52	Ø68xH67
ALLEN 1-V6	1x6.8W	700mA	609	512	V6 Array	18°, 30°, 48°	W80xL80xH52	Ø68xH67



FASHION-6W LED 1x6W


MATERIAL:ALUMINUM DIE-CAST+STEEL ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
WH/BK/BK
BK/BK/BK

IP20/ROHS/CE/▽

95x95x90H



FASHION-9W LED 1x9W


MATERIAL:ALUMINUM DIE-CAST+STEEL ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
WH/BK/BK
BK/BK/BK

IP20/ROHS/CE/▽

95x95x110H



FASHION 2-6W LED 2x6W


MATERIAL:ALUMINUM DIE-CAST+STEEL ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX V8 Array 2x 6.2W
2x703lm/3000K/CRI 80 550lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
WH/BK/BK
BK/BK/BK

IP20/ROHS/CE/▽

188x95x90H



FASHION 2-9W LED 2x9W


MATERIAL:ALUMINUM DIE-CAST+STEEL ADJUSTABLE ANGLE:0~30°/350°

LAMP:BRIDGELUX V8 Array 2x 9.2W
2x945lm/3000K/CRI 80 2x739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
WH/BK/WH
WH/BK/BK
BK/BK/BK

IP20/ROHS/CE/▽

188x95x110H



FASHION MR16 1x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL ADJUSTABLE ANGLE:0~30°/355°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK/WH
WH/BK/BK
BK/BK/BK

IP20/ROHS/CE/▽

95x95 H160



FASHION-GU10 GU10 1x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL ADJUSTABLE ANGLE:0~30°/355°

LAMP:1xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK/WH
WH/BK/BK
BK/BK/BK

IP20/ROHS/CE/▽

95x95 H160



FASHION 2 MR16 2x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL ADJUSTABLE ANGLE:0~30°/355°

LAMP:2xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
WH/BK/WH
WH/BK/BK
BK/BK/BK

IP20/ROHS/CE/▽

188x95 H160



FASHION 2-GU10 GU10 2x50W


MATERIAL:ALUMINUM DIE-CAST+STEEL ADJUSTABLE ANGLE:0~30°/355°

LAMP:2xGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
WH/BK/WH
WH/BK/BK
BK/BK/BK

IP20/ROHS/CE/▽


188x95 H160






EASY MR16 1x50W
 MATERIAL: STEEL + ALU
 ADJUSTABLE ANGLE: 0~20°/355°
 LAMP: 1xMR16 MAX. 50W
 GU5.3/12V EXCL. TRANSFO
 AVAILABLE COLOR:
 Silver Grey
 Sand White
 Sand Black
 IP20/ROHS/CE/▽
 80x80 H90

EASY-GU10 GU10 1x50W
 MATERIAL: ALUMINUM
 ADJUSTABLE ANGLE: 0~20°/350°
 LAMP: 1xGU10 MAX. 50W
 GU10 220-240V/50-60Hz
 AVAILABLE COLOR:
 Silver Grey
 Sand White
 Sand Black
 IP20/ROHS/CE/▽
 80x80 H90




EASY 2 MR16 2x50W
 MATERIAL: STEEL + ALU
 ADJUSTABLE ANGLE: 0~20°/355°
 LAMP: 2xMR16 MAX. 50W
 GU5.3/12V EXCL. TRANSFO
 AVAILABLE COLOR:
 Silver Grey
 Sand White
 Sand Black
 IP20/ROHS/CE/▽
 160x80 H90

EASY 2-GU10 GU10 2x50W
 MATERIAL: ALUMINUM
 ADJUSTABLE ANGLE: 0~20°/350°
 LAMP: 2xGU10 MAX. 50W
 GU10 220-240V/50-60Hz
 AVAILABLE COLOR:
 Silver Grey
 Sand White
 Sand Black
 IP20/ROHS/CE/▽
 160x80 H90




EASY HIDE MR16 1x50W
 MATERIAL: STEEL + ALU
 ADJUSTABLE ANGLE: 0~20°/355°
 LAMP: 1xMR16 MAX. 50W
 GU5.3/12V EXCL. TRANSFO
 AVAILABLE COLOR:
 Silver Grey
 Sand White
 Sand Black
 IP20/ROHS/CE/▽
 80x80 H90

EASY HIDE-GU10 GU10 1x50W
 MATERIAL: ALUMINUM
 ADJUSTABLE ANGLE: 0~20°/350°
 LAMP: 1xGU10 MAX. 50W
 GU10 220-240V/50-60Hz
 AVAILABLE COLOR:
 Silver Grey
 Sand White
 Sand Black
 IP20/ROHS/CE/▽
 80x80 H90




EASY 2 HIDE MR16 2x50W
 MATERIAL: STEEL + ALU
 ADJUSTABLE ANGLE: 0~20°/355°
 LAMP: 2xMR16 MAX. 50W
 GU5.3/12V EXCL. TRANSFO
 AVAILABLE COLOR:
 Silver Grey
 Sand White
 Sand Black
 IP20/ROHS/CE/▽
 160x80 H90

EASY 2 HIDE-GU10 GU10 2x50W
 MATERIAL: ALUMINUM
 ADJUSTABLE ANGLE: 0~20°/350°
 LAMP: 2xGU10 MAX. 50W
 GU10 220-240V/50-60Hz
 AVAILABLE COLOR:
 Silver Grey
 Sand White
 Sand Black
 IP20/ROHS/CE/▽
 160x80 H90




GD-1651 MR16 1x50W
 MATERIAL: ALUMINUM
 ADJUSTABLE ANGLE: 0~20°/350°
 LAMP: 1xMR16 MAX. 50W
 GU5.3/12V EXCL. TRANSFO
 AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush
 IP20/ROHS/CE/▽
 82x82 H100

GD-1651-GU10 GU10 1x50W
 MATERIAL: ALUMINUM
 ADJUSTABLE ANGLE: 0~20°/350°
 LAMP: 1xGU10 MAX. 50W
 GU10 220-240V/50-60Hz
 AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush
 IP20/ROHS/CE/▽
 82x82 H100




GD-1652 MR16 2x50W
 MATERIAL: ALUMINUM
 ADJUSTABLE ANGLE: 0~20°/350°
 LAMP: 2xMR16 MAX. 50W
 GU5.3/12V EXCL. TRANSFO
 AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush
 IP20/ROHS/CE/▽
 170x90 H100

GD-1652-GU10 GU10 2x50W
 MATERIAL: ALUMINUM
 ADJUSTABLE ANGLE: 0~20°/350°
 LAMP: 2xGU10 MAX. 50W
 GU10 220-240V/50-60Hz
 AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush
 IP20/ROHS/CE/▽
 170x90 H100



GD-1653 MR16 3x50W
 MATERIAL: ALUMINUM
 ADJUSTABLE ANGLE: 0~20°/350°
 LAMP: 3xMR16 MAX. 50W
 GU5.3/12V EXCL. TRANSFO
 AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush
 IP20/ROHS/CE/▽
 170x90 H100

GD-1653-GU10 GU10 3x50W
 MATERIAL: ALUMINUM
 ADJUSTABLE ANGLE: 0~20°/350°
 LAMP: 3xGU10 MAX. 50W
 GU10 220-240V/50-60Hz
 AVAILABLE COLOR:
 Sand White
 Sand Black
 Alu Brush
 IP20/ROHS/CE/▽
 170x90 H100





DL-5620 MR16 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~20°/350°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø68xH140



DL-5620-GU10 GU10 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~20°/350°

LAMP:1XGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø68xH140



DL-5621 MR16 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~20°/350°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø68xH140



DL-5621-GU10 GU10 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~20°/350°

LAMP:1XGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø68xH140



DL-6600 MR16 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~25°/350°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø92xH85



DL-6600-GU10 GU10 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~25°/350°

LAMP:1XGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø92xH150



DLE-6600-6W LED 1x 6W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~25°/350°

LAMP:BRIDGELUX V8 Array. 1x6.2W
635lm/3000K/CRI80 515lm/3000K/CRI90
EXCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø82xH130



DLE-6600-9W LED 1x 9W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~25°/350°

LAMP:BRIDGELUX V8 Array. 1x9.3W
870lm/3000K/CRI80 705lm/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø82xH150



DL-6900 QR111 1x 50W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1xQR111 MAX.50W
G53/12V EXCL.TRANSFO

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø185xH150



DL-6900-PAR30 PAR30 1x 75W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~30°/350°

LAMP:1XPAR30 MAX.75W
E27 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush


IP20/ROHS/CE/▽

Ø185xH200





DE-200 FM-1 /700 LED 1x2W




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:OSLON Square. 1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.


AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø48xH56 H51



DE-200 FM-1 LED 1x3W




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.


AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø48xH56 H51



DE-200 F-1 /700 LED 1x2W




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:OSLON Square. 1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.


AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø36xH56 H51



DE-200 F-1 LED 1x3W




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø36xH56 H51



DE-200 F-5W LED 1x5W




MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V6 Array 1x 6.8W
609lm/3000K/CRI 80 528lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
REFLECTOR ANGLE:30°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Chrome

IP40/ROHS/CE/▽

Ø50xH65





DE-200-1 /700 LED 1x2W


MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:0~20°/355°

LAMP:OSLON Square. 1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/

Ø54xH51



DE-200-1 LED 1x3W


MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:0~20°/355°

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/

Ø54xH51



DE-201-1 /700 LED 1x2W


MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:0~20°/355°

LAMP:OSLON Square. 1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/

Ø54xH51



DE-201-1 LED 1x3W


MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:0~20°/355°

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/

Ø54xH51



DE-221-1 /700 LED 1x2W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~15°/350°

LAMP:OSLON Square. 1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/

Ø54xH55



DE-202-1 /700 LED 2x2W


MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:0~20°/355°

LAMP:OSLON Square. 1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/

Ø54, L-58 H51



DE-202-1 LED 2x3W


MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:0~20°/355°

LAMP:BRIDGELUX V6 Array 2x 3.2W
2x348lm/3000K/CRI 80 2x292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/

Ø54, L-58 H51



DE-222-1 /700 LED 2x2W


MATERIAL:ALUMINUM
ADJUSTABLE ANGLE:0~20°/350°

LAMP:OSLON Square. 1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/

Ø54, L-52 H55





DE-230F-1 /700

LED 1x2W



DE-230F-1

LED 1x3W




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:OSLON Square.1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø36xH43




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø36xH43



DE-230-1 /700

LED 1x2W



DE-230-1

LED 1x3W




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:0°~15°

LAMP:OSLON Square.1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø45xH42




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:0°~15°

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø45xH42



DE-240-1H /700

LED 1x2W



DE-240-1H

LED 1x3W




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:0°~15°

LAMP:OSLON Square.1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø45xH55




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:0°~15°

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø45xH55



DE-220F-1 /700

LED 1x2W



DE-220F-1

LED 1x3W




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:OSLON Square.1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø36xH45





MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø36xH45

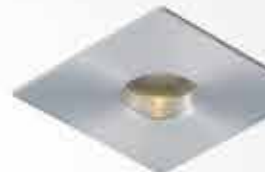

DE-221F-1 /700

LED 1x2W



DE-221F-1

LED 1x3W




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:OSLON Square.1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø36xH45




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø36xH45



DE-221F-1 /700

LED 1x2W



DE-221F-1

LED 1x3W




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:OSLON Square.1x2.1W
224lm/3000K/CRI 80 194lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 700mA-DC
LENS ANGLE:12°, 30°, 40°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø36xH45




MATERIAL:ALU DIE-CAST+ALU
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush

IP20/ROHS/CE/▽

Ø36xH45



INTERIOR

WALL RECESSED



WE-1926 P144



WE-1927 P144



WE-1927 K1 P144



WE-1927 K2 P144



WE-1926 L P145



WE-1927 L P145



K1 MINI P146



RITA P146




WE-1928 P146



WE-1906 P147



WE-1907 P147

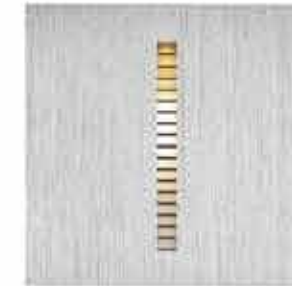

WE-1926 LED1x1~2W


MATERIAL:ALUMINUM

LAMP:OSLON Square.1x1~2.1W
138~224lm/CRI80/3000K,
120~194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 350~700mA-DC
CRI 80/90.

AVAILABLE COLOR:
Alu Brush. Sand White

IP20/ROHS/CE/

65x65 H55



WE-1927 LED1x1~2W


MATERIAL:ALUMINUM

LAMP:OSLON Square.1x1~2.1W
138~224lm/CRI80/3000K,
120~194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 350~700mA-DC
CRI 80/90.

AVAILABLE COLOR:
Alu Brush. Sand White

IP20/ROHS/CE/

65x65 H55



WE-1927 K1 LED1x1~2W


MATERIAL:ALUMINUM

LAMP:OSLON Square.1x1~2.1W
138~224lm/CRI80/3000K,
120~194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 350~700mA-DC
CRI 80/90.

AVAILABLE COLOR:
Alu Brush. Sand White

IP20/ROHS/CE/

65x65 H55



WE-1927 K2 LED1x1~2W


MATERIAL:ALUMINUM

LAMP:OSLON Square.1x1~2.1W
138~224lm/CRI80/3000K,
120~194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 350~700mA-DC
CRI 80/90.

AVAILABLE COLOR:
Alu Brush. Sand White

IP20/ROHS/CE/

65x65 H55





WE-1926L LED1x1~2W


MATERIAL:ALUMINUM

LAMP:OSLON Square, 1x1~2.1W
138~224lm/CRI80/3000K,
120~194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 350~700mA-DC
CRI 80/90.

AVAILABLE COLOR:
Alu Brush, Sand White

IP20/ROHS/CE/

170x26 H55



WE-1927L LED1x1~2W


MATERIAL:ALUMINUM

LAMP:OSLON Square, 1x1~2.1W
138~224lm/CRI80/3000K,
120~194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 350~700mA-DC
CRI 80/90.

AVAILABLE COLOR:
Alu Brush, Sand White

IP20/ROHS/CE/

170x45 H55



K1 MINI LED1x1~2W


MATERIAL:ALUMINUM

LAMP:OSLON Square, 1x1~2.1W
138~224lm/CRI80/3000K,
120~194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 350~700mA-DC
CRI 80/90.

AVAILABLE COLOR:
Alu Brush, Sand White

IP20/ROHS/CE/

62x26 H55



RITA LED1x1~2W


MATERIAL:ALUMINUM+PC

LAMP:OSLON Square, 1x1~2.1W
138~224lm/CRI80/3000K,
120~194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 350~700mA-DC
CRI 80/90.

AVAILABLE COLOR:
Alu Brush, Sand White

IP20/ROHS/CE/

45x45 H55



WE-1928 LED1x1~2W


MATERIAL:ALUMINUM

LAMP:OSLON Square, 1x1~2.1W
138~224lm/CRI80/3000K,
120~194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 350~700mA-DC
CRI 80/90.

AVAILABLE COLOR:
Alu Brush, Sand White


IP43/ROHS/CE/

75x75 H70



**WALL
RECESSED**

**WALL
RECESSED**

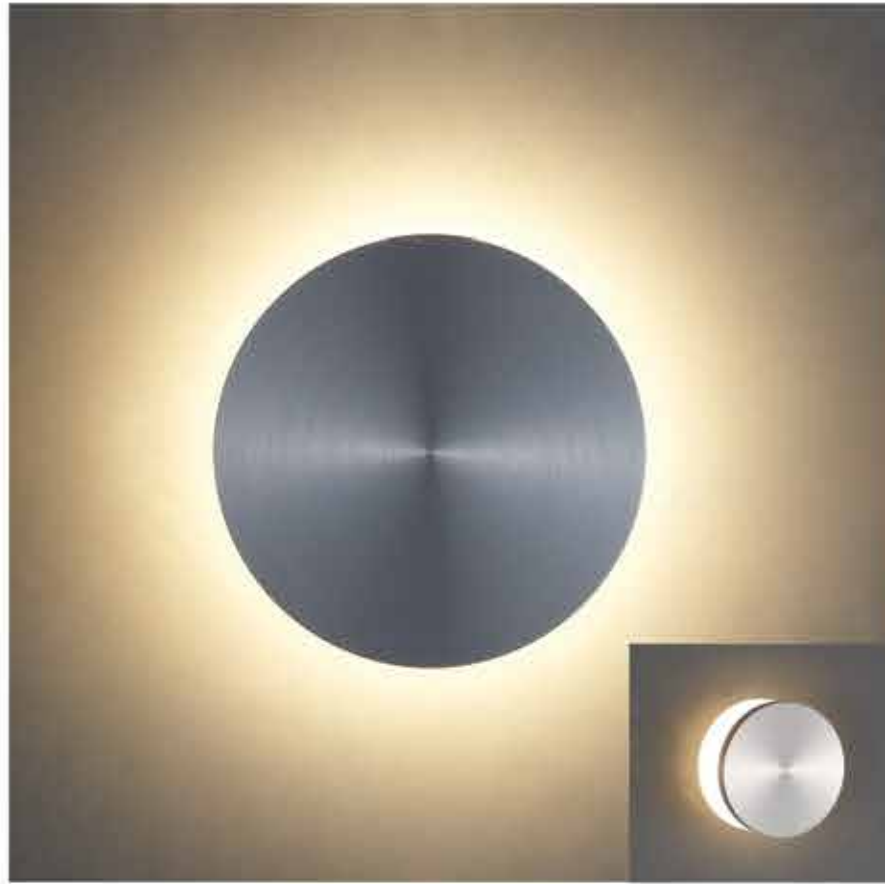

WE-1906 G2 LED1x2W



WE-1906 MAX G2 LED1x5W




MATERIAL:ALUMINUM+PMMA

MATERIAL:ALUMINUM+PMMA


LAMP:OSLON Square. 1x2.1W
224lm/CRI80/3000K,194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 700mA-DC
CRI 80/90.

LAMP:BRIDGELUX V6 ARRAY 1x4.6W/500mA
471lm/CRI80/3000K,399lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 500mA-DC
CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush



AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush



IP43/ROHS/CE/▽

IP43/ROHS/CE/▽

Ø40xH42

Ø68xH35

WE-1907 G2 LED1x2W



WE-1907 MAX G2 LED1x5W




MATERIAL:ALUMINUM+PMMA

MATERIAL:ALUMINUM+PMMA


LAMP:OSLON Square. 1x2.1W
224lm/CRI80/3000K,194lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 700mA-DC
CRI 80/90.

LAMP:BRIDGELUX V6 ARRAY 1x4.6W/500mA
471lm/CRI80/3000K,399lm/CRI90/3000K,
EXCL. LED POWER SUPPLY 500mA-DC
CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush



AVAILABLE COLOR:
Sand White
Sand Black
Alu Brush




IP43/ROHS/CE/▽

IP43/ROHS/CE/▽


Ø40xH42

Ø68xH35

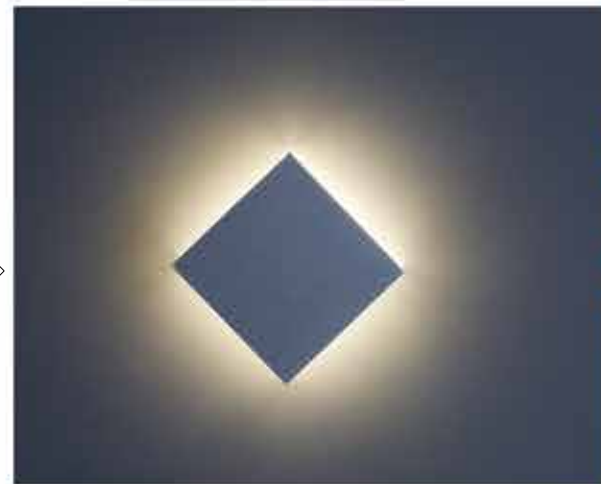

INTERIOR

WALL SURFACE

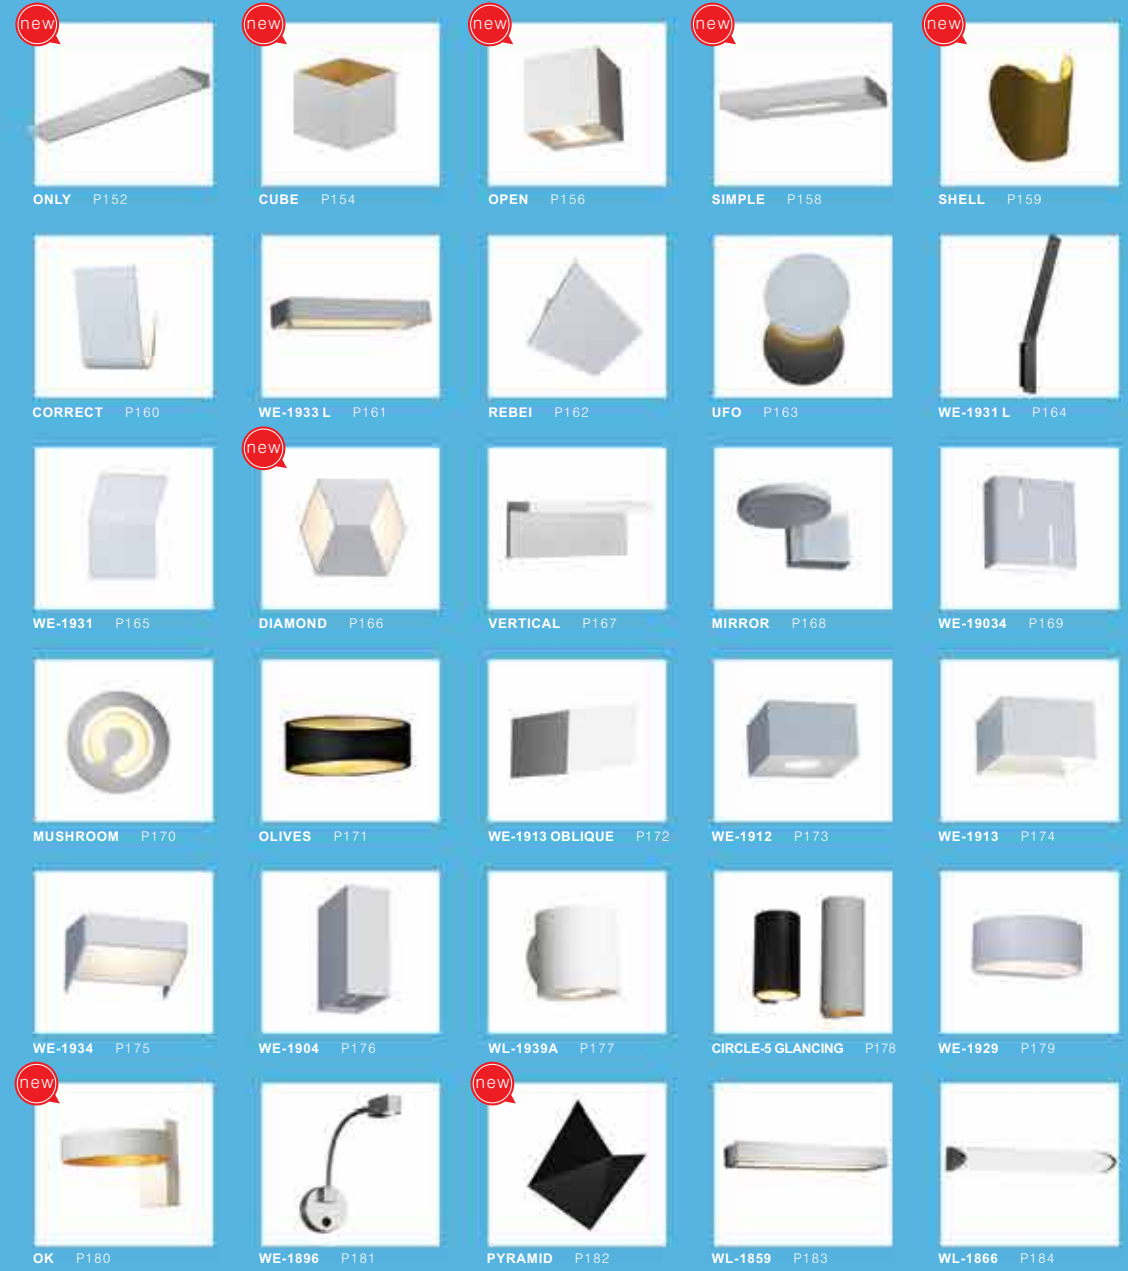



ONLY is wall light series for indirect lighting, with slender and exquisite design, it can be in the architecture environment harmoniously.

ONLY is applied with Lumileds SMD led with high stability, and 90° professional slender reflective lens, with high performance, grant a very efficiently and comfortable lighting environment.

ONLY series provide various sizes and outputs for options, 291mm/6W and 577mm/12W are driver built-in versions, other sizes are external driver version.

There are non-dimmable or TRIAC dimming or 1-10V dimming versions for customers' options.




ONLY

MATERIAL:ALUMINUM

AVAILABLE COLOR:Sand White Sand Black Sand Grey Champagne

IP20/ROHS/CE/




LAMP:LUXEON 3020 LEDSTRIP 285mm/12V/6W 720lm/3000K/CRI80 600lm/3000K/CRI90
INCL. LED POWER SUPPLY 12V/6W-DC AC 100-240V/50-60Hz.

MODEL NO.	LENGTH(mm)	POWER (W)	DRIVER(BUILT-IN)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	WEIGHT(g)
ONLY-6W	291	6	NO DIM	650	560	550
ONLY-12W	577	2x6	NO DIM	1300	1120	982

LAMP:LUXEON 3020 LEDSTRIP 285mm/700mA/6.5W 720lm/3000K/CRI80 600lm/3000K/CRI90
INCL. LED POWER SUPPLY 700mA-DC AC 100-240V/50-60Hz.

MODEL NO.	LENGTH(mm)	POWER (W)	DRIVER(EXTERNAL)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	WEIGHT(g)
ONLY-20W	865	19.5	NO DIM	2160	1800	1457
ONLY DIM-20W	865	19.5	TRIAC DIMMING	2160	1800	
ONLY 1-10V-20W	865	19.5	1~10V DIM	2160	1800	1927
ONLY-26W	1150	26	NO DIM	2880	2400	
ONLY DIM-26W	1150	26	TRIAC DIMMING	2880	2400	
ONLY 1-10V-26W	1150	26	1~10V DIM	2880	2400	2884
ONLY-39W	1723	39	NO DIM	4320	3600	
ONLY DIM-39W	1723	39	TRIAC DIMMING	4320	3600	
ONLY 1-10V-39W	1723	39	1~10V DIM	4320	3600	3300
ONLY-46W	2010	45.5	NO DIM	5040	4200	
ONLY 1-10V-46W	2010	45.5	1~10V DIM	5040	4200	
ONLY-59W	2583	58.5	NO DIM	6480	5400	4236
ONLY 1-10V-59W	2583	58.5	1~10V DIM	6480	5400	
ONLY-65W	2870	65	NO DIM	7200	6000	4700
ONLY 1-10V-65W	2870	65	1~10V DIM	7200	6000	

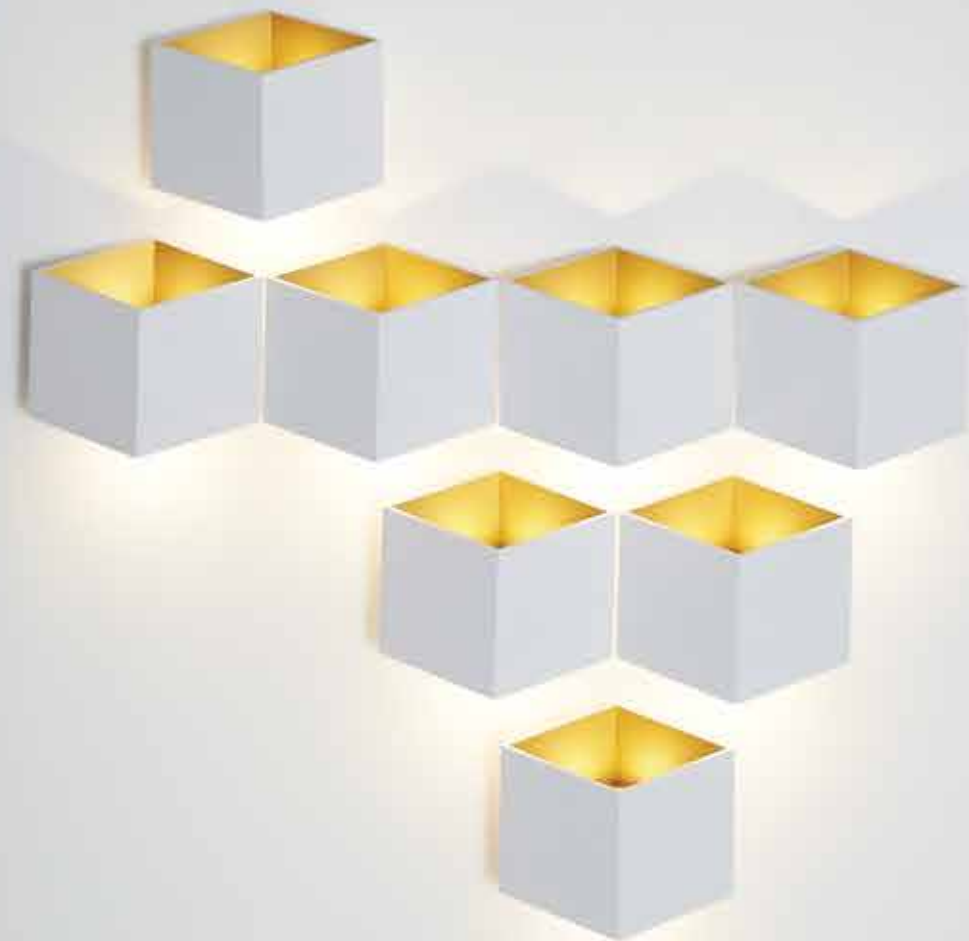


CUBE is a wall light luminaire with bright character, it can be single use on the wall, as well as use several pieces to make geometric patterns! But no matter what, CUBE is super attractive!

CUBE offers a variety of color matching, white, black, champagne, white/gold, black/gold.

CUBE series has 9W-12W different outputs, TRIAC dimming or non-dimmable different versions for customers' options.

DIAMOND is born as a brother product from CUBE, it is geometrical which consists of a multi-cutting faces, like a diamond, makes everybody impressed.

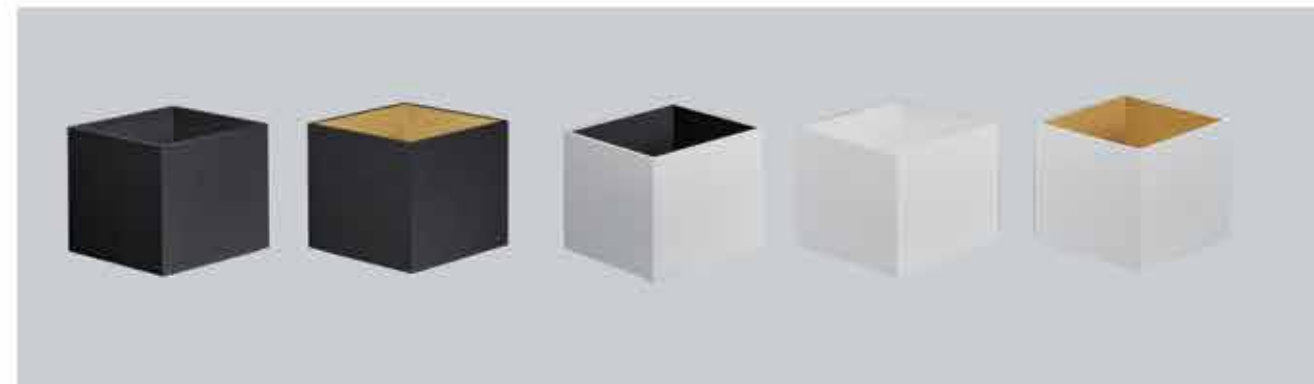

CUBE LED 2x6W



MATERIAL:ALU DIE-CAST + ALU+GLASS

LAMP:BRIDGELUX V8 ARRAY 2x6.2W/350mA, 2x703lm/CRI80/3000K,2x550lm/CRI90/3000K, INCL. LED POWER SUPPLY 350mA-DC AC 100-240V/50-60Hz. ⊕


AVAILABLE COLOR:Sand White, Sand White/Gold, Sand Black, Sand Black/Gold, Champagne
IP43/ROHS/CE/∇

CUBE DIM LED 2x6W



MATERIAL:ALU DIE-CAST + ALU+GLASS

LAMP:BRIDGELUX V8 ARRAY 2x6.2W/350mA, 2x703lm/CRI80/3000K,2x550lm/CRI90/3000K, INCL. LED POWER SUPPLY 350mA-DC TRIAC DIM AC 220-240V/50-60Hz. ⊕

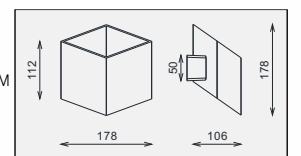

CUBE-9W LED 2x5W



MATERIAL:ALU DIE-CAST + ALU+GLASS

LAMP:BRIDGELUX V6 ARRAY 2x4.6W/500mA, 2x471lm/CRI80/3000K,2x399lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC AC 100-240V/50-60Hz. ⊕


AVAILABLE COLOR:Sand White, Sand White/Gold, Sand Black, Sand Black/Gold, Champagne
IP43/ROHS/CE/∇

CUBE DIM-9W LED 2x5W



MATERIAL:ALU DIE-CAST + ALU+GLASS

LAMP:BRIDGELUX V6 ARRAY 2x4.6W/500mA, 2x471lm/CRI80/3000K,2x399lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC TRIAC DIM AC 220-240V/50-60Hz. ⊕

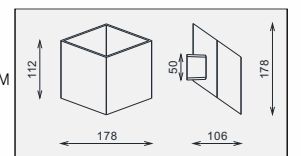



OPEN, a standard cube, which inside its fixture are two mechanisms on both up and down side for lighting beam angle adjustment, customers can freely adjust the angles rely on different scenes, achieve an absolutely flexibility.

Based on OPEN, we also developed a new basic wall light series of OPEN FIX, which looks the same with OPEN in appearance but has fixed light beam angle, its price is lower and more competitive!

Both of the two series used professional designed 85° reflector, it is made of high reflective white PC material, which improves the output lumen and central luminous intensity over 30%!

The above two series both have indoor and outdoor versions, 6W-9W different outputs, and TRIAC dimming or non-dimmable versions for customers' options.

If you have request for G9 halogen version, please feel free to contact our sales team!




OPEN

MATERIAL:ALU DIE-CAST+ ALU+GLASS

AVAILABLE COLOR:Sand White,Sand Black,Sand Grey,Sand White/Gold,Sand Black/Gold ROHS/CE/☑/☑

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP BRIDGELUX	INPUT VOLTAGE (V)	IP
OPEN-6W	2x3.2W	350mA NO DIM	2x348	2x292	V6 ARRAY	100~240V	43
OPEN	2x4.6W	500mA NO DIM	2x471	2x399	V6 ARRAY	100~240V	43
OPEN DIM	2x4.6W	500mA TRIAC DIMMING	2x471	2x399	V6 ARRAY	220~240V	43
OPEN OUT-6W	2x3.2W	350mA NO DIM	2x348	2x292	V6 ARRAY	100~240V	54
OPEN OUT	2x4.6W	500mA NO DIM	2x471	2x399	V6 ARRAY	100~240V	54
OPEN OUT DIM	2x4.6W	500mA TRIAC DIMMING	2x471	2x399	V6 ARRAY	220~240V	54

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP BRIDGELUX	INPUT VOLTAGE (V)	IP
OPEN FIX-6W	2x3.2W	350mA NO DIM	2x348	2x292	V6 ARRAY	100~240V	43
OPEN FIX	2x4.6W	500mA NO DIM	2x471	2x399	V6 ARRAY	100~240V	43
OPEN FIX DIM	2x4.6W	500mA TRIAC DIMMING	2x471	2x399	V6 ARRAY	220~240V	43
OPEN FIX OUT-6W	2x3.2W	350mA NO DIM	2x348	2x292	V6 ARRAY	100~240V	54
OPEN FIX OUT	2x4.6W	500mA NO DIM	2x471	2x399	V6 ARRAY	100~240V	54
OPEN FIX OUT DIM	2x4.6W	500mA TRIAC DIMMING	2x471	2x399	V6 ARRAY	220~240V	54

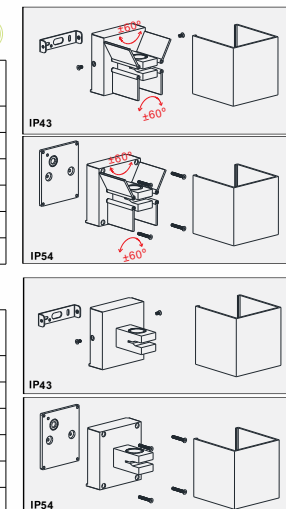



SIMPLE series is wall light for both indirect lighting and decorative lighting, the upper side of the fixture is the main direction of light distribution, through the reflector and linear spread glass, the light is disperses and distributes on the wall and ceiling very uniform. Moreover our designer ingeniously made a oval hole to make good use of the rest of the light, which create a unique selling point of decorative lighting for SIMPLE!

SIMPLE Series:
 Small version : 1000lm or 1400lm of luminance for options.
 Max version : 3000 lm of luminance.

There are non-dimmable or TRIAC dimming or 1-10V dimming versions for options.

MATERIAL:ALUMINUM DIE-CAST

AVAILABLE COLOR:Sand White, Sand Black, Sand Grey, Champagne IP20/ROHS/CE/Ⓢ/♻️


MODEL NO.	DIMENSION(mm) LxWxH	POWER (W)	DRIVER(BUILT-IN)	LUMINANCE(lm) 3000K/CRI80	LUMINANCE(lm) 3000K/CRI90	LAMP BRIDGELUX	INPUT VOLTAGE (V)
SIMPLE-V6	205x95x26	9.2	NO DIM	942	790	V6 ARRAY	100~240V
SIMPLE DIM-V6	205x95x26	9.2	TRIAC DIMMING	942	790	V6 ARRAY	220~240V
SIMPLE	205x95x26	12.4	NO DIM	1406	1100	V8 ARRAY	100~240V
SIMPLE DIM	205x95x26	12.4	TRIAC DIMMING	1406	1100	V8 ARRAY	220~240V
SIMPLE MAX	288x128x28	27.6	NO DIM	2948	2334	V10 ARRAY	100~240V
SIMPLE MAX DIM	288x128x28	27.6	TRIAC DIMMING	2948	2334	V10 ARRAY	220~240V
SIMPLE MAX 1~10V	288x128x28	27.6	1~10V DIMMING	2948	2334	V10 ARRAY	220~240V



WALL SURFACE

Shell, this wall light looks like a shell, with a smooth and natural appearance. The special of Shell is you can adjust the light beam by just turning its "shell", it is simply and directly!

Shell series have both indoor and outdoor versions, TRIAC dimming or non-dimmable versions for customers' options.

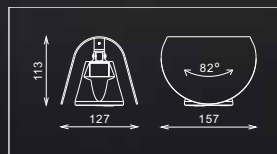

MATERIAL:ALU DIE-CAST + ALU+GLASS

AVAILABLE COLOR:Sand White, Sand Black, Sand Grey, Champagne

ROHS/CE/☑/☑



MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP BRIDGELUX	INPUT VOLTAGE (V)	IP
SHELL	2x4.6W	500mA NO DIM	2x471	2x399	V6 ARRAY	100~240V	43
SHELL DIM	2x4.6W	500mA TRIAC DIMMING	2x471	2x399	V6 ARRAY	220~240V	43
SHELL OUT	2x4.6W	500mA NO DIM	2x471	2x399	V6 ARRAY	100~240V	54
SHELL OUT DIM	2x4.6W	500mA TRIAC DIMMING	2x471	2x399	V6 ARRAY	220~240V	54

WALL SURFACE



CORRECT-6W LED 1x6W




MATERIAL:ALUMINUM

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/CRI80/3000K,550lm/CRI90/3000K, INCL. LED POWER SUPPLY 350mA-DC AC 100-240V/50-60Hz.☑

AVAILABLE COLOR:
Sand White
Sand Black
Sand Grey
Champagne

IP40/ROHS/CE/☑



CORRECT DIM LED 1x6W




MATERIAL:ALUMINUM

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/500mA, 703lm/CRI80/3000K,550lm/CRI90/3000K, INCL. LED POWER SUPPLY 350mA-DC TRIAC DIM AC 220-240V/50-60Hz.☑

AVAILABLE COLOR:
Sand White
Sand Black
Sand Grey
Champagne

IP40/ROHS/CE/☑





REBEI is a irregular product design. It is interesting that you can feel different lighting effect from different position. And all looks quite nice.

WE-1933

MATERIAL:ALU DIE-CAST + ALU+PMMA
 AVAILABLE COLOR:Sand Black, Sand White, Champagne IP40/ROHS/CE/☉/▽

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP	INPUT VOLTAGE (V)	SIZE(mm)		
							L	W	H
WE-1933-12	18x0.36W	350mA NO DIM	790	680	LUXEON 3020	100~240V	300	125	50
WE-1933-16	24x0.5W	500mA NO DIM	945	739	LUXEON 3020	100~240V	400	125	50
WE-1933-20	30x0.5W	500mA NO DIM	703	550	LUXEON 3020	100~240V	500	125	50




REBEI R G2 LED 1x6W

MATERIAL:ALUMINUM+STEEL+PMMA

LAMP:LUXEON 3020 18x0.36W
 790lm/CRI80/3000K, 680lm/CRI90/3000K,
 INCL. LED POWER SUPPLY 350mA-DC
 AC 100-240V/50-60Hz.☉CRI 80.

AVAILABLE COLOR:
 Sand Black, Sand White, Champagne

IP40/ROHS/CE/▽




REBEI G2 LED 1x6W

MATERIAL:ALUMINUM+STEEL+PMMA

LAMP:LUXEON 3020 18x0.36W
 790lm/CRI80/3000K, 680lm/CRI90/3000K,
 INCL. LED POWER SUPPLY 350mA-DC
 AC 100-240V/50-60Hz.☉CRI 80.

AVAILABLE COLOR:
 Sand Black, Sand White, Champagne

IP40/ROHS/CE/▽



WALL SURFACE



UFO G2 LED 1x6W

MATERIAL:ALUMINUM+PMMA

LAMP:LUXEON 3020 18x0.36W ☺
790lm/CRI80/3000K,680lm/CRI90/3000K,
INCL. LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz .CRI 80/90.

AVAILABLE COLOR:Sand Black, Sand White, Sand White/Gold, Sand Black/Gold, Champagne

IP40/ROHS/CE/☺/▽

UFO DIM G2 LED 1x6W

LAMP:LUXEON 3020 18x0.36W ☺
790lm/CRI80/3000K,680lm/CRI90/3000K,
INCL. LED POWER SUPPLY 350mA-DC TRIAC DIM
AC 220-240V/50-60Hz .CRI 80/90.




WALL SURFACE



AVAILABLE COLOR:Sand Black, Sand White, Champagne IP40/ROHS/CE/☺/▽

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP	INPUT VOLTAGE (V)	SIZE(mm)		
							L	W	H
WE-1931L-16	18x0.36W	350mA NO DIM	790	680	LUXEON 3020	100-240V	70	119	400
WE-1931L-23	24x0.5W	500mA NO DIM	1090	950	LUXEON 3020	220-240V	70	162	555
WE-1931L-28	30x0.5W	500mA NO DIM	1370	1180	LUXEON 3020	220-240V	70	197	700
WE-1931L DIM-16	18x0.36W	350mA ATRIAC DIMMING	790	680	LUXEON 3020	100-240V	70	119	400
WE-1931L DIM-23	24x0.5W	500mA ATRIAC DIMMING	1090	950	LUXEON 3020		70	162	555
WE-1931L DIM-28	30x0.5W	500mA ATRIAC DIMMING	1370	1180	LUXEON 3020	220~240V	70	197	700





WE-1931 G2 LED 1x6W

MATERIAL:ALUMINUM+PC

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL.LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz

AVAILABLE COLOR:Sand White, Sand Black, Chrome

IP20/ROHS/CE/


WE-1931 DIM G2 LED 1x6W

MATERIAL:ALUMINUM+PC

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL.LED POWER SUPPLY 350mA-DC TRIAC DIM
AC 100-240V/50-60Hz

AVAILABLE COLOR:Sand White, Sand Black, Chrome

IP20/ROHS/CE/




WE-1932 G2 LED 1x6W

MATERIAL:ALUMINUM+PC

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL.LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz

AVAILABLE COLOR:Sand White, Sand Black, Chrome

IP20/ROHS/CE/




DIAMOND LED 1x6W

MATERIAL:ALUMINUM

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/CRI80/3000K, 550lm/CRI90/3000K,
INCL. LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand White/Gold
Sand Black
Sand Black/Gold
Champagne

IP20/ROHS/CE/

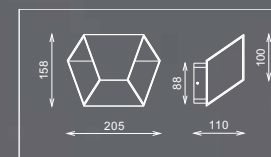


DIAMOND DIM LED 1x9W

MATERIAL:ALUMINUM


LAMP:BRIDGELUX V8 ARRAY 1x9.2W/500mA, 945lm/CRI80/3000K, 739lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
TRIAC DIM
AC 220-240V/50-60Hz

AVAILABLE COLOR:
Sand White
Sand White/Gold
Sand Black
Sand Black/Gold
Champagne

IP20/ROHS/CE/

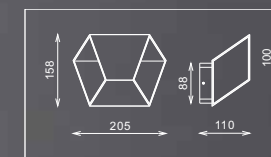

DIAMOND is born as a brother product from CUBE, it is geometrical which consists of a multi-cutting faces, like a diamond, makes everybody impressed.

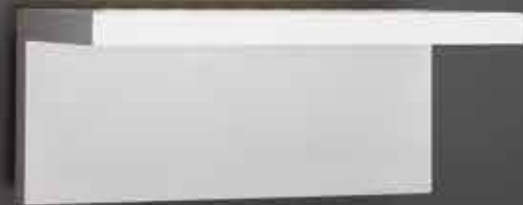

VERTICAL LED 1x6W




MATERIAL:ALUMINUM+GLASS

LAMP:LUXEON 3020 16x0.39W
810lm/CRI80/3000K,700lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz .CRI 80/90.

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White, Champagne

IP40/ROHS/CE/



VERTICAL L LED 1x6W




MATERIAL:ALUMINUM+GLASS

LAMP:LUXEON 3020 18x0.36W
790lm/CRI80/3000K,680lm/CRI90/3000K,
INCL. LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz .CRI 80/90.

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White, Champagne

IP40/ROHS/CE/



MIRROR G2 LED 1x6W




MATERIAL:ALUMINUM+GLASS

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA,
703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL.LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP20/ROHS/CE/





WE-1903 G2 LED 1x6W



MATERIAL:ALUMINUM+PC

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA,
703lm/3000K/CRI80,550lm/3000K/CRI90
INCL. LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz


AVAILABLE COLOR:Sand Black,Sand White,Alu Brush,Champagne

IP20/ROHS/CE/

WL-1903 G9 1x40W

MATERIAL:ALUMINUM

LAMP:1xG9 MAX.40W
G9 220-240V/50-60Hz



MUSHROOM DIM LED 1x6W

MATERIAL:ALU DIE-CAST+PMMA


LAMP:LUXEON 3020 18x0.36W
790lm/CRI80/3000K,680lm/CRI90/3000K,
INCL. LED POWER SUPPLY 350mA-DC TRIAC DIM
AC 100-240V/50-60Hz
CRI 80/90.

AVAILABLE COLOR:Sand Grey,Sand Black,Sand White

IP40/ROHS/CE/

MUSHROOM LED 1x6W

LAMP:LUXEON 3020 18x0.36W
790lm/CRI80/3000K,680lm/CRI90/3000K,
INCL. LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz
CRI 80/90.



WALL
SURFACE



OLIVES G2 LED 1x6W




MATERIAL:ALUMINUM

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA,
703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL. LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz

AVAILABLE COLOR:Sand Black, Sand White, Sand Black/Gold,
Sand White/Gold, Alu Brush/White, Champagne

IP20/ROHS/CE/



WALL
SURFACE



WE-1913 OBLIQUE G2 LED 1x5W




MATERIAL:ALUMINUM+PMMA

LAMP:BRIDGELUX V6 Array 1x 4.6W
471lm/3000K/CRI 80 399lm/3000K/CRI 90
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz

AVAILABLE COLOR:Sand Black, Sand White, Sand Black/Gold,
Sand White/Gold, Alu Brush/White, Champagne

IP20/ROHS/CE/






WE-1912-2 G2 LED 2x3W

MATERIAL:ALUMINUM+PC

LAMP:BRIDGELUX V6 Array 2x 3.2W ⊕
2x348lm/3000K/CRI 80 2x292lm/3000K/CRI 90
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz

AVAILABLE COLOR:
Sand Black, Sand White
Sand Black/Gold
Sand White/Gold
Alu Brush/White
Champagne

IP20/ROHS/CE/∇




WE-1912 G2 LED 1x3W

MATERIAL:ALUMINUM+PC

LAMP:BRIDGELUX V6 Array 1x 3.2W ⊕
348lm/3000K/CRI 80 292lm/3000K/CRI 90
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz

AVAILABLE COLOR:
Sand Black, Sand White
Sand Black/Gold
Sand White/Gold
Alu Brush/White
Champagne

IP20/ROHS/CE/∇




WE-1913 G2 LED 1x5W

MATERIAL:ALUMINUM+PC

LAMP:BRIDGELUX V6 Array 1x 4.6W ⊕
471lm/3000K/CRI 80 399lm/3000K/CRI 90
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz

AVAILABLE COLOR:Sand Black, Sand White, Sand Black/Gold
Sand White/Gold, Alu Brush/White, Champagne

IP20/ROHS/CE/∇



WALL
SURFACE




WE-1934 DIM G2 LED 1x6W

MATERIAL:ALUMINUM+PC

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA,
703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL.LED POWER SUPPLY 350mA-DC TRIAC DIM
AC 100-240V/50-60Hz

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA,
703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL.LED POWER SUPPLY 350mA-DC TRIAC DIM
AC 220-240V/50-60Hz



AVAILABLE COLOR:Sand Black,Sand White,Sand Black/Gold,Sand White/Gold,Alu Brush/White,Champagne


IP20/ROHS/CE/

WALL
SURFACE



AVAILABLE COLOR:Sand Black,Sand White,Alu Brush,Champagne IP20/ROHS/CE/

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP	INPUT VOLTAGE (V)
WE-1904-6W G2	2x3.2W	350mA NO DIM	2x348	2x292	BRIDGELUX V6 Array	100~240V
WE-1904 G2	2x4.6W	500mA NO DIM	2x471	2x399	BRIDGELUX V6 Array	220~240V
WE-1904 DIM G2	2x4.6W	500mA TRIAC DIMMING	2x471	2x399	BRIDGELUX V6 Array	220~240V
WL-1904	1x40W	NO DRIVER	/	/	G9	110/220V




WALL SURFACE

WALL SURFACE




WE-1939A G2 LED 1x6W

MATERIAL:ALU DIE-CAST+ALU+PC
LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL..LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz
AVAILABLE COLOR:
Sand Black
Sand White
Champagne
IP20/ROHS/CE/



WE-1939 G2 LED 1x6W

MATERIAL:ALU DIE-CAST+ALU+PC
LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL..LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz
AVAILABLE COLOR:
Sand Black
Sand White
Champagne
IP20/ROHS/CE/




CIRCLE-5 GLANCING LED 1x4W

MATERIAL:ALUMINUM
LAMP:CREE XM-L2 EZW. 1x4W
INCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE: 32.45. CRI 80.
AVAILABLE COLOR:
Sand Grey. Sand Black. Sand White
IP20/ROHS/CE/

CIRCLE-5 GLANCING GU10 1x 50W

MATERIAL:ALUMINUM
LAMP:1XGU10 MAX.50W
GU10 220-240V/50-60Hz
AVAILABLE COLOR:
Sand Grey. Sand Black. Sand White
IP20/ROHS/CE/




CIRCLE-8 GLANCING LED 2x4W

MATERIAL:ALUMINUM
LAMP:CREE XM-L2 EZW. 2x4W
INCL.LED POWER SUPPLY 350mA-DC
REFLECTOR ANGLE: 32.45. CRI 80.
AVAILABLE COLOR:
Sand Grey. Sand Black. Sand White
IP20/ROHS/CE/

CIRCLE-8 GLANCING GU10 2x 50W

MATERIAL:ALUMINUM
LAMP:2XGU10 MAX.50W
GU10 220-240V/50-60Hz
AVAILABLE COLOR:
Sand Grey. Sand Black. Sand White
IP20/ROHS/CE/



WALL
SURFACE



WE-1929 G2 LED 1x6W




MATERIAL:ALUMINUM+PC

LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL. LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz. Ⓢ

AVAILABLE COLOR:Sand Black, Sand White, Alu Brush

IP20/ROHS/CE/▽



WALL
SURFACE



OK LED 1x6W




MATERIAL:ALUMINUM

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA,
703lm/CRI80/3000K,550lm/CRI90/3000K,
INCL. LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz. Ⓢ

AVAILABLE COLOR:WHI, BLK, WHI/GLD, WHI/BLK
BLK/GLD, SLV GRY

IP20/ROHS/CE/▽






WE-1896/S4 LED 1x2W

MATERIAL:ALUMINUM+GLASS
 LAMP:OSLON Square.1x2.1W
 224lm/CRI80/3000K,194lm/CRI90/3000K,
 EXCL. LED POWER SUPPLY 700mA-DC
 CRI 80/90.



AVAILABLE COLOR:
 Alu Brush, Sand Black, Sand White
 IP20/ROHS/CE/



WE-1896/S4x2 LED 2x2W

MATERIAL:ALUMINUM+GLASS
 LAMP:OSLON Square.2x2.1W
 224lm/CRI80/3000K,194lm/CRI90/3000K,
 EXCL. LED POWER SUPPLY 700mA-DC
 CRI 80/90.


AVAILABLE COLOR:
 Alu Brush, Sand Black, Sand White
 IP40/ROHS/CE/

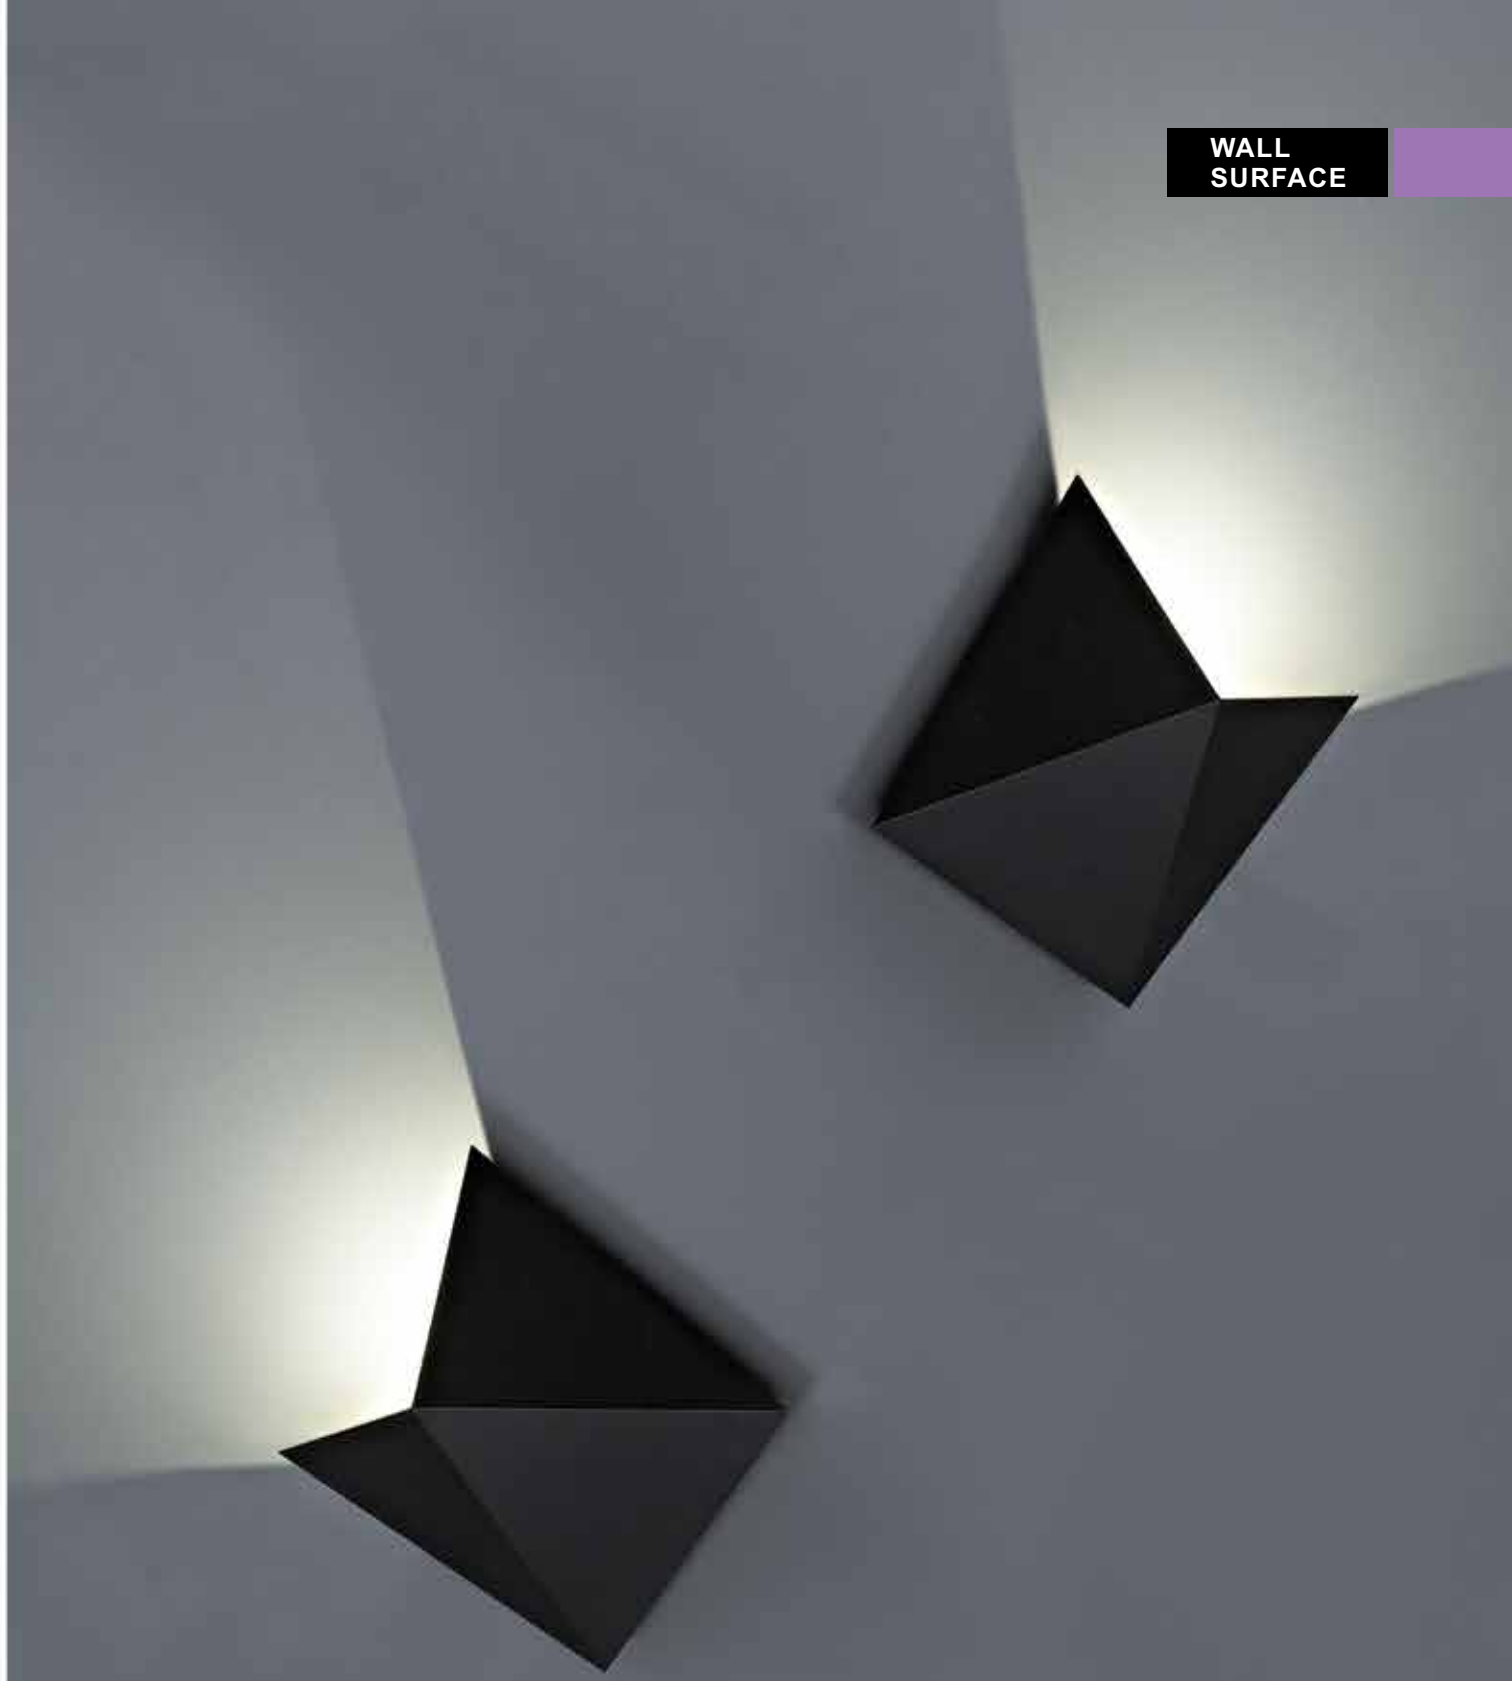



PYRAMID G2

MATERIAL:ALU DIE-CAST + ALU+PMMA
 AVAILABLE COLOR:Sand White, Sand Black, Champagne IP43/ROHS/CE/ /

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm)		LAMP	INPUT VOLTAGE (V)
			3000K/CRI80	3000K/CRI90		
PYRAMID G2	1x9.2W	500mA NO DIM	945	739	BRIDGELUX V8 Array	100~240V
PYRAMID DIM G2	1x9.2W	500mA TRIAC DIMMING	945	739	BRIDGELUX V8 Array	220~240V
PYRAMID G2-6W	1x6.2W	350mA NO DIM	703	550	BRIDGELUX V8 Array	100~240V



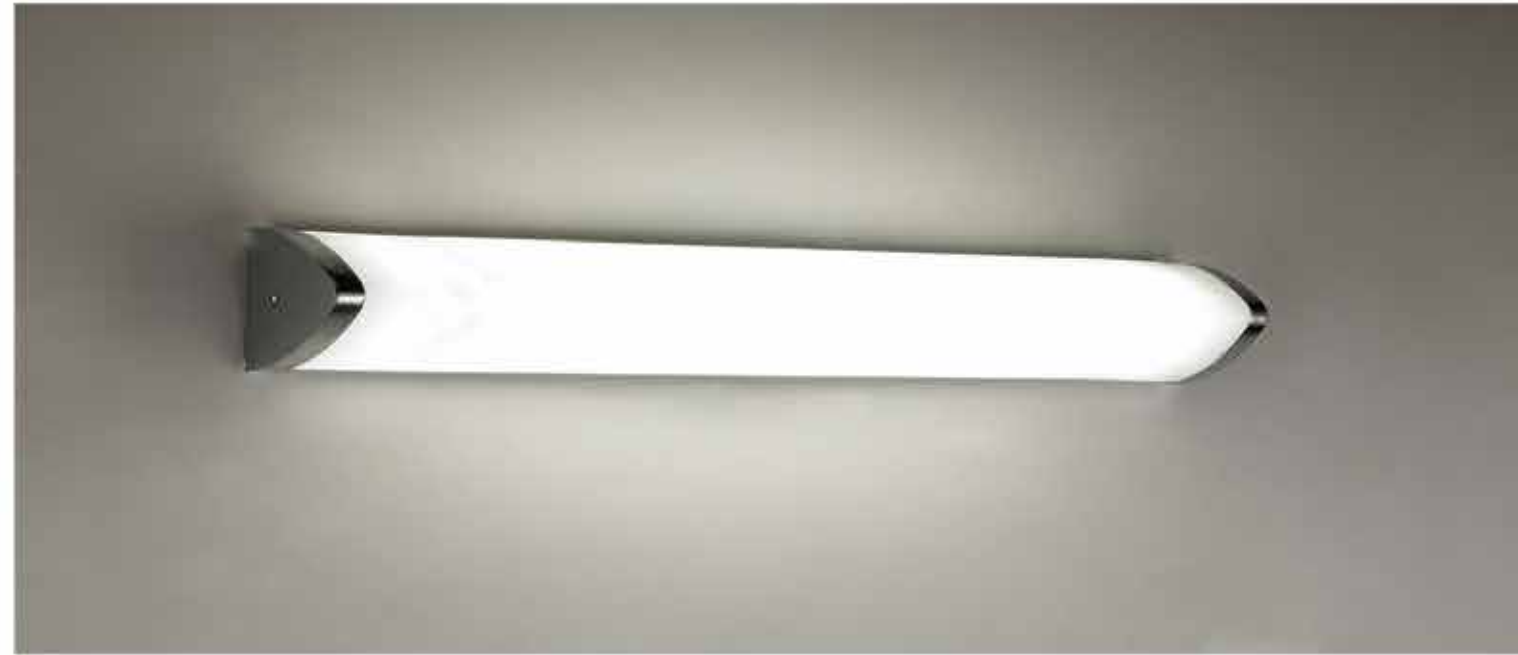

Aluminum+PMMA or Glass ----- L W H ----- L W H

WL-1859 SERIES

MATERIAL:ALUMINUM+PC
 LAMP:T5
 INCL.BALLAST
 AC 220-240V/50-60Hz ⊕
 AVAILABLE COLOR:
 Sand White, Alu Brush
 IP44/ROHS/CE/∇


W1859(G9)			G9 1x40W	150	105	60
W1859(G9)			G9 2x40W	250	105	60
W1859(PLC)			PLC 1x13W	250	105	60
W1859(PL)			PL 1x24W	400	105	60

W1859(PL)-24			PL 1x55W	610	105	60
W1859(T5)			T5 1x8W	350	105	60
W1859(T5)-24			T5 1x14W	610	105	60
W1859(T5)-36			T5 1x21W	910	105	60

WL-1866 SERIES



MATERIAL:ALUMINUM+PC
 LAMP:T5
 INCL.BALLAST
 AC 220-240V/50-60Hz ⊕
 AVAILABLE COLOR:
 Sand White/ White
 Sand White/Chrome
 IP44/ROHS/CE/∇



	L	W	H
W1866	338	75	75
W1866-24	600	75	75
W1866-36	900	75	75



OUT



EXTERIOR

CEILING RECESSED CEILING SURFACE



DE-200 F P188



DE-110 P194



NEW 130 P189



X-SKY P195



RISE P191



DL-2633 F P196



DL-2646 F P192



TELESCOPE OUT P197



AIRCRAFT P193

OUT CEILING



DE-200 FIX-9W LED 1x9W



MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL. LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black
Chrome

IP54/ROHS/CE/

Ø68xH70



DE-200 FIX-9W S



DE-200 FIX M-9W LED 1x9W


MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE::FIXED

LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL. LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP54/ROHS/CE/

Ø83xH70



DE-200 FIX MAXI-24W LED 1x24W


MATERIAL:ALU DIE-CAST + ALU
ADJUSTABLE ANGLE::FIXED

LAMP:BRIDGELUX VERO13 16.8~ 24.2W
2030lm/3000K/CRI 80 1680lm/3000K/CRI90
INCL. LED POWER SUPPLY 500~700mA-DC
AC 100-240V/50-60Hz
REFLECTOR ANGLE:22°, 38°, 60°.CRI 80/90/97.

AVAILABLE COLOR:
Silver Grey
Matt White
Matt Black

IP54/ROHS/CE/

Ø114xH100





X-SKY


X-SKY is a series for essential lighting, its appearance design is consistent with the own minimalist style of NSL, classic and good-looking. During these two years, it has become a star product of NSL.

With the development of LED technology, meanwhile benefited from LUXEON 3030 2D(2 chip)SMD and a PMMA lens with superior diffusing effect, X-SKY series has got further technology upgrading, now it has higher output and more competitive price!

MATERIAL:ALU DIE-CAST + PMMA ADJUSTABLE ANGLE:FIXED
 AVAILABLE COLOR:Sand White、 Sand Black IP44/ROHS/CE/LED



MODEL NO.	POWER (W)	DRIVER(EXCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP	SIZE(mm) WxLxH	Cut-Out(mm) WxLxH
X-SKY-10W	1x10W	500mA	1120	902	LUXEON3030 2D	102x102x76	93x93x86
X-SKY MIDI-16W	1x16W	500mA	1700	1501	LUXEON3030 2D	145x145x82	130x130x92
X-SKY MAX-22W	1x22W	700mA	2420	2145	LUXEON3030 2D	175x175x82	163x163x102
X-SKY MM-22W	1x22W	700mA	2420	2145	LUXEON3030 2D	200x200x82	183x183x102
X-SKY MM-33W	1x33W	1050mA	3580	3157	LUXEON3030 2D	200x200x82	183x183x102



PHILIPS
LUMILEDS

MOUNTING KIT 3A MATERIAL:ALUMINUM 116x116 H100 	MOUNTING KIT 14 MATERIAL:ALUMINUM 185x185 H110
MOUNTING KIT 13 MATERIAL:ALUMINUM 154x154 H110 	MOUNTING KIT 24 MATERIAL:ALUMINUM 205x205 H110

MATERIAL:ALU DIE-CAST + PMMA ADJUSTABLE ANGLE:FIXED
 AVAILABLE COLOR:Sand White、 Sand Black IP44/ROHS/CE/LED

MODEL NO.	POWER (W)	DRIVER(EXCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP	SIZE(mm) WxLxH	INCL MOUNTING KIT
X-SKY HIDE-10W	1x10W	500mA	1120	902	LUXEON3030 2D	92x92x76	MOUNTING KIT 3A
X-SKY MIDI HIDE-16W	1x16W	500mA	1700	1501	LUXEON3030 2D	128x128x82	MOUNTING KIT 13
X-SKY MAX HIDE-22W	1x22W	700mA	2420	2145	LUXEON3030 2D	159x159x82	MOUNTING KIT 14
X-SKY MM HIDE-22W	1x22W	700mA	2420	2145	LUXEON3030 2D	182x182x82	MOUNTING KIT 24
X-SKY MM HIDE-33W	1x33W	1050mA	3580	3157	LUXEON3030 2D	182x182x82	MOUNTING KIT 24



DE-110-9W LED 1x9W



MATERIAL:ALUMINUM+GLASS
ADJUSTABLE ANGLE:FIXED
LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:33°, 48°.CRI 80/90.

AVAILABLE COLOR:
Alu Brush
Black Brush
Matt White

IP54/ROHS/CE/▽

Ø68xH65



DE-110-9W S



Ø78

DE-110-14W LED 1x14W



MATERIAL:ALUMINUM+GLASS
ADJUSTABLE ANGLE:FIXED
LAMP:BRIDGELUX V10 ARRAY. 1x13.8W
1340lm/3000K/CRI80 1135lm/3000K/CRI90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:20°, 28°, 40°.CRI 80/90.

AVAILABLE COLOR:
Alu Brush
Black Brush
Matt White

IP54/ROHS/CE/▽

Ø89xH105



Ø89



RISE-5W LED 1x5W




MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE::FIXED

LAMP:BRIDGELUX V6 Array 1x 4.6W
500lm/3000K/CRI 80 410lm/3000K/CRI 90
EXCL.LED POWER SUPPLY 500mA-DC
REFLECTOR ANGLE:26°, 38°.CRI 80/90.

AVAILABLE COLOR:
Silver Grey
Matt White
Matt Black

IP44/ROHS/CE/▽

Ø50xH65



DL-2633F/C1

DL-2633F MR16 1x 50W




MATERIAL:ALUMINUM+GLASS+STEEL
ADJUSTABLE ANGLE:FIXED

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Alu Brush
Black Brush
Matt White

IP54/ROHS/CE/▽

Ø68xH135



Ø80

DL-2633F GU10 1x 50W




MATERIAL:ALUMINUM+GLASS+STEEL
ADJUSTABLE ANGLE:FIXED

LAMP:1XGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Alu Brush
Black Brush
Matt White

IP54/ROHS/CE/▽

Ø68xH135



Ø80



DL-2646F MR16 1x 50W




MATERIAL:ALUMINUM+GLASS
ADJUSTABLE ANGLE:0~30°

LAMP:1xMR16 MAX.50W
GU5.3/12V EXCL.TRANSFO

AVAILABLE COLOR:
Alu Brush
Black Brush
Matt White

IP54/ROHS/CE/▽

Ø70xH135



Ø92

DL-2646F GU10 1x 50W




MATERIAL:ALUMINUM+GLASS
ADJUSTABLE ANGLE:0~30°

LAMP:1XGU10 MAX.50W
GU10 220-240V/50-60Hz

AVAILABLE COLOR:
Alu Brush
Black Brush
Matt White

IP54/ROHS/CE/▽

Ø70xH135



Ø92



NEW 130 MINI-6W LED 1x6W




MATERIAL:ALU DIE-CAST + PMMA
ADJUSTABLE ANGLE:FIXED

LAMP:LUXEON 3030 2D 6x1.07W/500mA, 663lm/CRI80/3000K, 585lm/CRI90/3000K, EXCL.LED POWER SUPPLY 500mA-DC 3000K/4000K/5000K.CRI 80/90

AVAILABLE COLOR:
Sand Black,
Sand White
Silver Grey
Sand Black/Sand Gold
Sand White/Sand Gold

IP44/ROHS/CE/

Ø83 H87



NEW 130-10W LED 1x10W




MATERIAL:ALU DIE-CAST + PMMA
ADJUSTABLE ANGLE:FIXED

LAMP:LUXEON 3030 2D 9x1.07W/500mA, 1120lm/CRI80/3000K, 902lm/CRI90/3000K, EXCL.LED POWER SUPPLY 500mA-DC 3000K/4000K/5000K.CRI 80/90

AVAILABLE COLOR:
Sand Black,
Sand White
Silver Grey
Sand Black/Sand Gold
Sand White/Sand Gold

IP44/ROHS/CE/

Ø102 H95



NEW 130 MIDI-13W LED 1x13W




MATERIAL:ALU DIE-CAST + PMMA
ADJUSTABLE ANGLE:FIXED

LAMP:LUXEON 3030 2D 12x1.07W/500mA, 1436lm/CRI80/3000K, 1267lm/CRI90/3000K, EXCL.LED POWER SUPPLY 500mA-DC 3000K/4000K/5000K.CRI 80/90

AVAILABLE COLOR:
Sand Black,
Sand White
Silver Grey
Sand Black/Sand Gold
Sand White/Sand Gold

IP44/ROHS/CE/

Ø133 H105



NEW 130 MAX-13W LED 1x13W




MATERIAL:ALU DIE-CAST + PMMA
ADJUSTABLE ANGLE:FIXED

LAMP:LUXEON 3030 2D 12x1.07W/500mA, 1436lm/CRI80/3000K, 1267lm/CRI90/3000K, EXCL.LED POWER SUPPLY 500mA-DC 3000K/4000K/5000K.CRI 80/90

AVAILABLE COLOR:
Sand Black,
Sand White
Silver Grey
Sand Black/Sand Gold
Sand White/Sand Gold

IP44/ROHS/CE/

Ø163 H105



NEW 130 MAX-19W LED 1x19W





MATERIAL:ALU DIE-CAST + PMMA
ADJUSTABLE ANGLE:FIXED

LAMP:LUXEON 3030 2D 18x1.07W/500mA, 2100lm/CRI80/3000K, 1852lm/CRI90/3000K, EXCL.LED POWER SUPPLY 500mA-DC 3000K/4000K/5000K.CRI 80/90

AVAILABLE COLOR:
Sand Black,
Sand White
Silver Grey
Sand Black/Sand Gold
Sand White/Sand Gold

IP44/ROHS/CE/

Ø163 H105

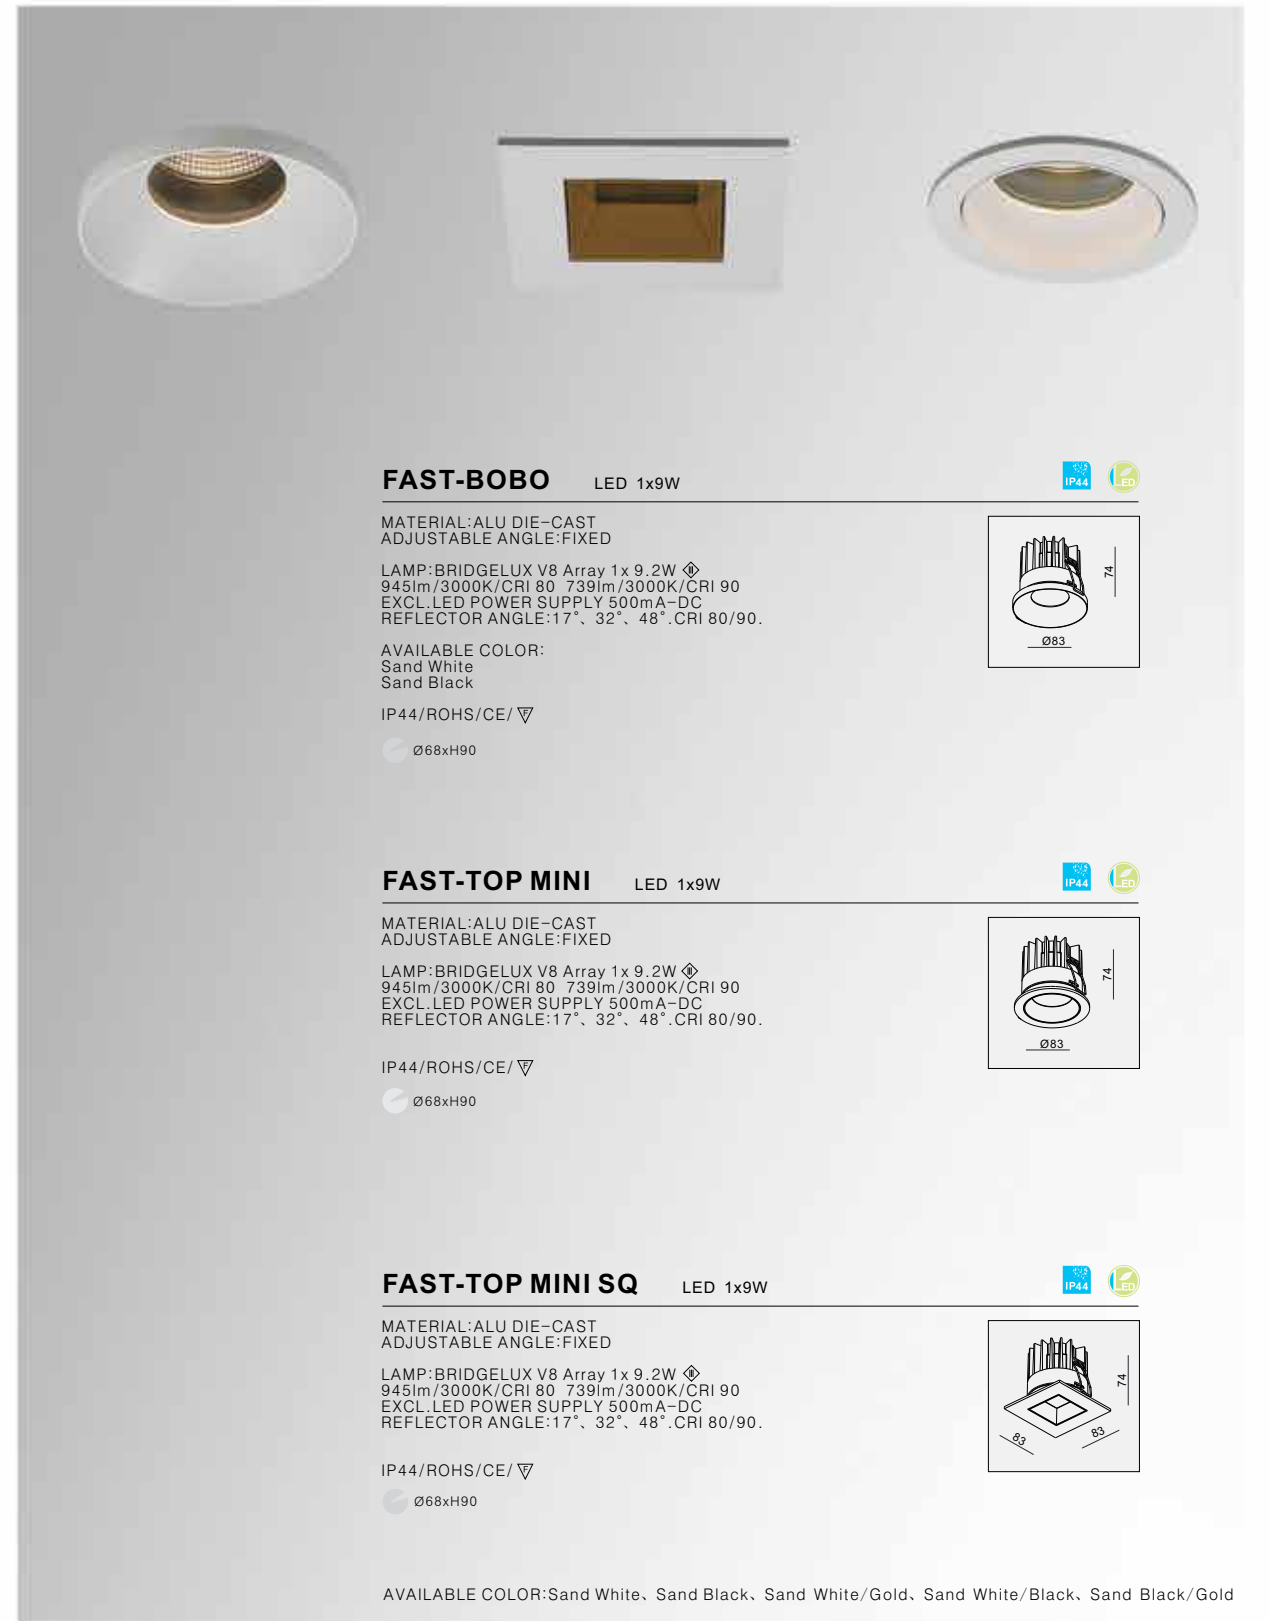

FAST-BOBO LED 1x9W




MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V8 Array 1x 9.2W, 945lm/3000K/CRI 80, 739lm/3000K/CRI 90, EXCL.LED POWER SUPPLY 500mA-DC, REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White
Sand Black

IP44/ROHS/CE/

Ø68xH90



FAST-TOP MINI LED 1x9W




MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V8 Array 1x 9.2W, 945lm/3000K/CRI 80, 739lm/3000K/CRI 90, EXCL.LED POWER SUPPLY 500mA-DC, REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP44/ROHS/CE/

Ø68xH90



FAST-TOP MINI SQ LED 1x9W




MATERIAL:ALU DIE-CAST
ADJUSTABLE ANGLE:FIXED

LAMP:BRIDGELUX V8 Array 1x 9.2W, 945lm/3000K/CRI 80, 739lm/3000K/CRI 90, EXCL.LED POWER SUPPLY 500mA-DC, REFLECTOR ANGLE:17°, 32°, 48°.CRI 80/90.

IP44/ROHS/CE/

Ø68xH90



AVAILABLE COLOR:Sand White, Sand Black, Sand White/Gold, Sand White/Black, Sand Black/Gold




TELESCOPE OUT



TELESCOPE OUT

MATERIAL: ALU DIE-CAST+ALU+GLASS
 AVAILABLE COLOR: Sand White, Sand Black, Champagnel P44/ROHS/CE/LED

MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP (BRIDGELUX)	REFLECTOR ANGLE	SIZE(mm) H	INPUT VOLTAGE (V)
TELESCOPE OUT	1x6.2W	350mA NO DIM	703	550	V8 Array	32°, 48°	112	100~240V
TELESCOPE L-9W OUT	1x9.2W	500mA NO DIM	945	739	V8 Array	32°, 48°	150	100~240V
TELESCOPE L-9W OUT DIM	1x9.2W	500mA TRIAC DIMMING	945	739	V8 Array	32°, 48°	150	220~240V




SKY OK ED

SKY OK ED

MATERIAL: ALUMINUM DIE-CAST
 ADJUSTABLE ANGLE: FIXED

LAMP: LUXEON 3030 2D 9x1.07W/500mA
 1120lm/CRI80/3000K, 902lm/CRI90/3000K,
 INCL. LED POWER SUPPLY 500mA-DC
 3000K/4000K/5000K, CRI 80/90

AVAILABLE COLOR: WHI, BLK, GRY, WHI/GLD, BLK/GLD
 IP44/ROHS/CE/LED






COURSE OUT



COURSE OUT-6W LED 1x6W   **COURSE OUT** LED 1x9W   **COURSE OUT DIM** LED 1x9W  


MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 ARRAY 1x6.2W/350mA, 703lm/CRI80/3000K,550lm/CRI90/3000K, INCL. LED POWER SUPPLY 350mA-DC AC 100-240V/50-60Hz  REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black

IP65/ROHS/CE/▽


MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 ARRAY 1x9.3W/500mA, 945lm/CRI80/3000K,739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC AC 100-240V/50-60Hz  REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black



IP65/ROHS/CE/▽

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 ARRAY 1x9.3W/500mA, 945lm/CRI80/3000K,739lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC TRIAC DIM AC 220-240V/50-60Hz  REFLECTOR ANGLE:32°, 48°.CRI 80/90.

AVAILABLE COLOR:
Sand White Sand White/Black
Sand Black Sand Black/Gold
Sand Grey Sand Grey/Black

IP65/ROHS/CE/▽

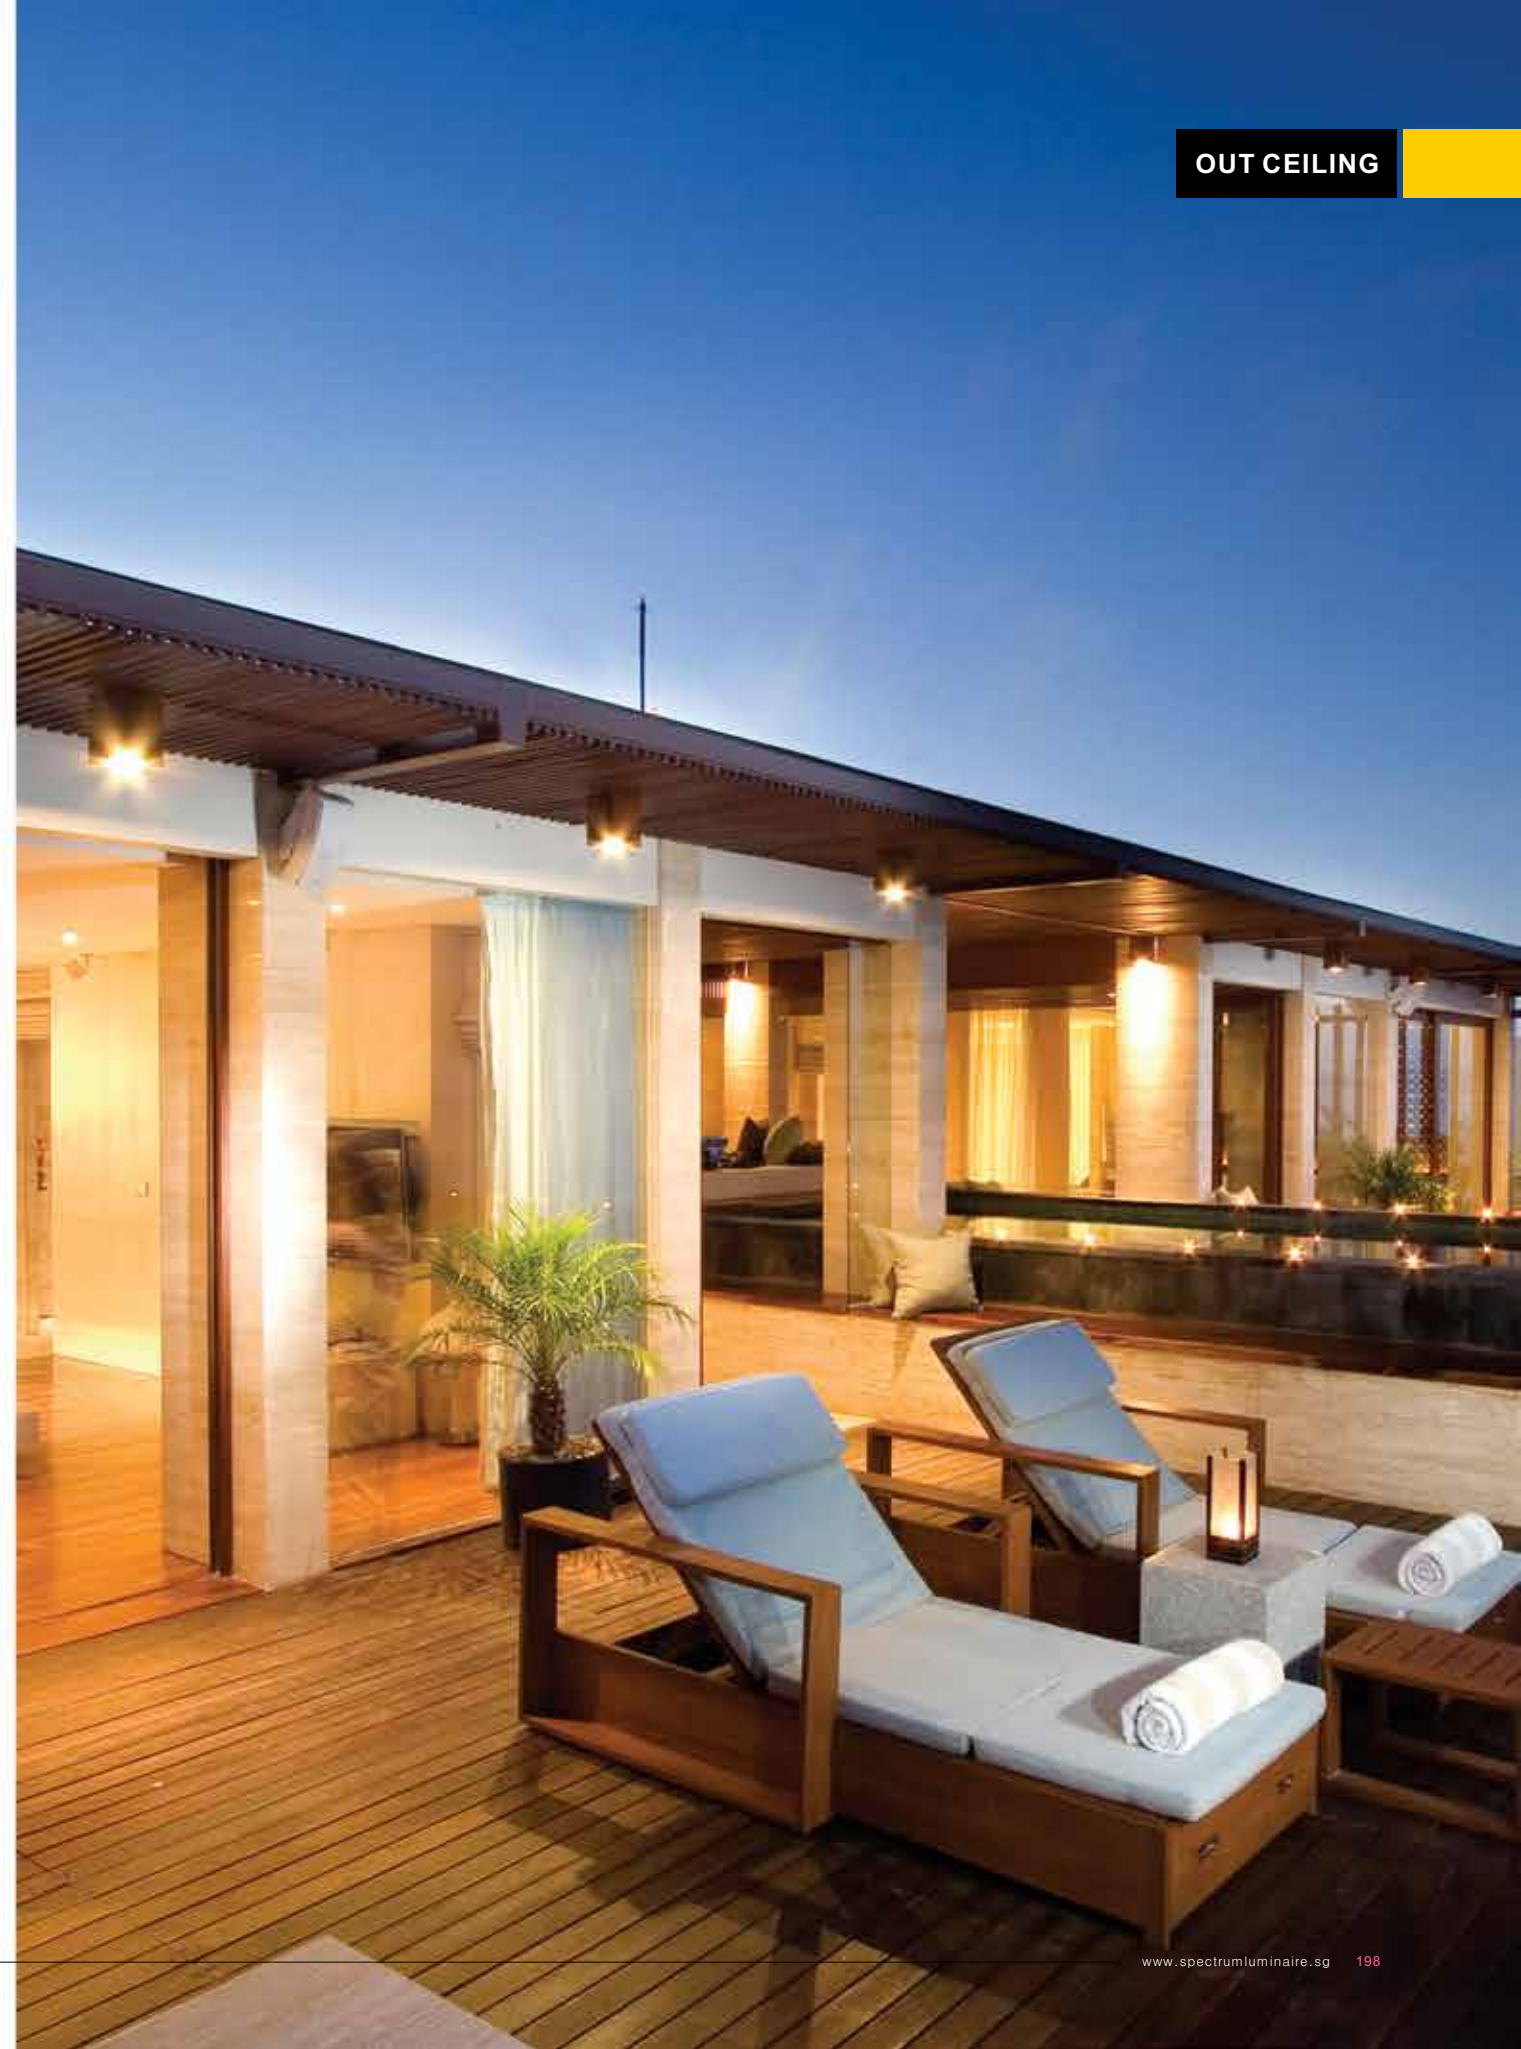

EXTERIOR

WALL SURFACE



LAW L P201



LOTTA P221



HUGO P203



BLONDIE P205



LANCE P206



WE-1904 OUT P207



WE-1924A OUT P208



EYE P209



PILLAR P210



NO DEFECT P211



LANCE OK P212



WE-1911 P213



WL-1824 P214



WE-1893 P215



WE-1894 P216



WE-1915 P217



WE-1916 P218



WL-1818 P219



WL-1819 P220



WL-1857 P221



WE-1899 P223




LAW L LED 1x6W

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz. Ⓢ
CRI 80/90.

AVAILABLE COLOR:
Sand Grey
Sand Black
Sand White

IP65/ROHS/CE/▽




LAW T LED 2x6W


MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 Array 2x 6.2W
2x703lm/3000K/CRI 80 2x550lm/3000K/CRI 90
INCL LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz. Ⓢ
CRI 80/90.

AVAILABLE COLOR:
Sand Grey
Sand Black
Sand White

IP65/ROHS/CE/▽



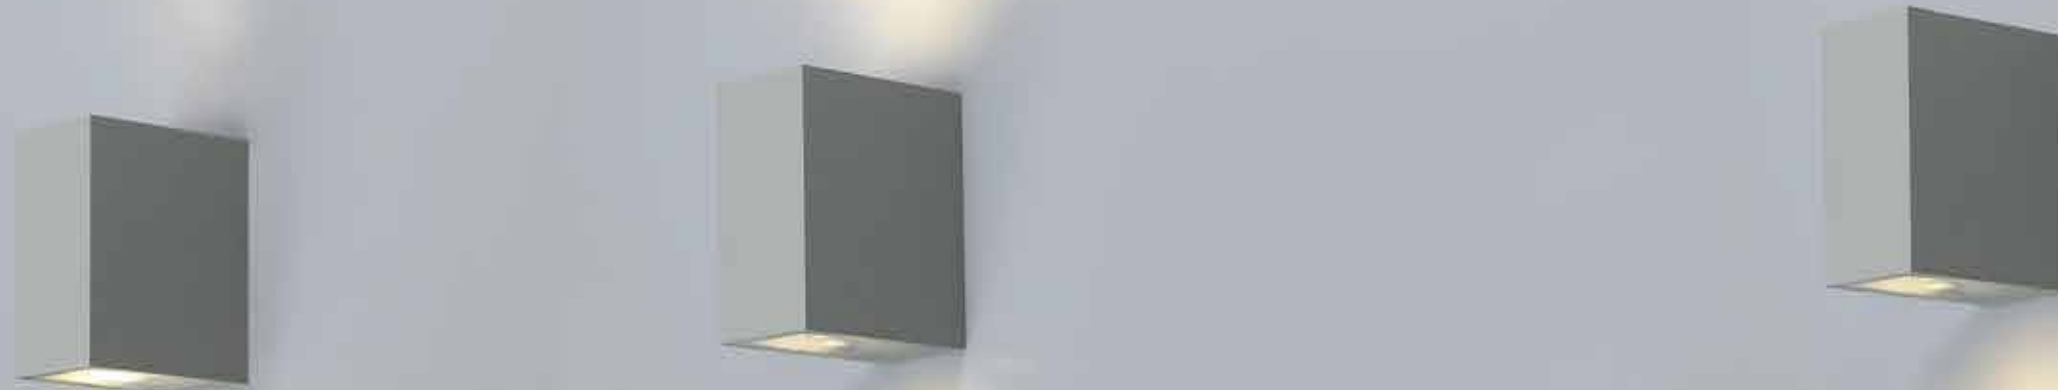

HUGO is a series of up and down lighting wall light. Provides narrow or wide optic beam distribution and can be combined with one another. Especially its 4° lens, with its outstanding performance it can be as a long distance decorative lighting in outdoor environments. Thanks to its fashion design and compact dimension, this luminaire can be integrated into modern or historical architecture. It produces an interesting lighting effect just consuming very little energy.

By combining narrow beam and wide beam optics, it can create an attractive lighting effect on the facade, meanwhile providing uniform illumination on the ground.

This series is IP65 high protection product, which can be applied to various outdoor occasions.

There are up/down two lights version or single light version for options.

HUGO WIDE LED 3X2W+3x2W

HUGO NARROW LED 1X2W+1x2W

HUGO NARROW/WIDE LED 1X2W+3x2W

HUGO SINGLE WIDE LED 3X2W

HUGO SINGLE NARROW LED 1X2W

MATERIAL:ALU DIE-CAST+GLASS
LAMP:XP-E2 3X2.2W+3x2.2W 700mA;
483lm+483lm /3000K/CRI80.
414lm+414lm /3000K/CRI90
INCL. LED POWER SUPPLY 700mA-DC
AC 100-240V/50-60Hz
LENS ANGLE:60°+60°

MATERIAL:ALU DIE-CAST+GLASS
LAMP:XP-E2 1X2.2W+1x2.2W 700mA;
161lm+161lm /3000K/CRI80.
138lm+138lm /3000K/CRI90
INCL. LED POWER SUPPLY 700mA-DC
AC 100-240V/50-60Hz
LENS ANGLE:4°+4°

MATERIAL:ALU DIE-CAST+GLASS
LAMP:XP-E2 1X2.2W+3x2.2W 700mA;
161lm+430lm /3000K/CRI80.
138lm+414lm /3000K/CRI90
INCL. LED POWER SUPPLY 700mA-DC
AC 100-240V/50-60Hz
LENS ANGLE:4°+60°

MATERIAL:ALU DIE-CAST+GLASS
LAMP:XP-E2 3X2.2W 700mA;
483lm /3000K/CRI80.414lm /3000K/CRI90
INCL. LED POWER SUPPLY 700mA-DC
AC 100-240V/50-60Hz
LENS ANGLE:60°

MATERIAL:ALU DIE-CAST+GLASS
LAMP:XP-E2 1X2.2W 700mA;
161lm /3000K/CRI80.138lm /3000K/CRI90
INCL. LED POWER SUPPLY 700mA-DC
AC 100-240V/50-60Hz
LENS ANGLE:4°

AVAILABLE COLOR:
Sand White
Sand Black
Sand Grey

AVAILABLE COLOR:
Sand White
Sand Black
Sand Grey

AVAILABLE COLOR:
Sand White
Sand Black
Sand Grey

AVAILABLE COLOR:
Sand White
Sand Black
Sand Grey

AVAILABLE COLOR:
Sand White
Sand Black
Sand Grey




IP65/ROHS/CE/▽

IP65/ROHS/CE/▽

IP65/ROHS/CE/▽

IP65/ROHS/CE/▽

IP65/ROHS/CE/▽



WALL SURFACE



BLONDIE

It is applied with one Lumileds LUXEON MZ led, meanwhile matching with a special and professional reflector. With an excellent performance of this reflector, it can diffuse a single led to have two directions of light! One side is a 5.5° narrow light beam, specially use for long distance lighting application, the other side is a wide light beam, provides a decorative illumination on the nearby facade. Furthermore, this product includes 3 styles of cover accessory, customers can simply assemble these accessories to have four different lighting effects, create variant decorative illuminations for outdoor environments.

BLONDIE LED 1x8W




MATERIAL:ALU DIE-CAST+GLASS


LAMP:LUXEON MZ 1x7.8W
INCL. LED POWER SUPPLY 700mA-DC
AC 100-240V/50-60Hz. ☺
REFLECTOR ANGLE:5.5° /Asymmetric
CRI 80.

AVAILABLE COLOR:
WHI
BLK
GRY

IP65/ROHS/CE/▽



No insert Wide insert Narrow insert Closed

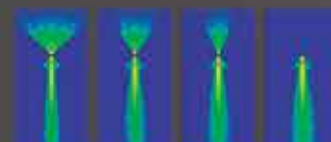

WALL SURFACE



LANCE SINGLE-10W



MATERIAL:ALU DIE-CAST+GLASS

LAMP:LUXEON 3020 24X0.39W/500mA,
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz. ☺

AVAILABLE COLOR:WHI, BLK, GRY

IP54/ROHS/CE/▽



LANCE SINGLE-16W




MATERIAL:ALU DIE-CAST+GLASS

LAMP:LUXEON 3020 35X0.45W/700mA,
INCL. LED POWER SUPPLY 700mA-DC
AC 100-240V/50-60Hz. ☺

AVAILABLE COLOR:WHI, BLK, GRY

IP65/ROHS/CE/▽



LANCE-10W



MATERIAL:ALU DIE-CAST+GLASS

LAMP:LUXEON 3020 24X0.39W/500mA,
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz. ☺

AVAILABLE COLOR:WHI, BLK, GRY

IP54/ROHS/CE/▽



LANCE-16W




MATERIAL:ALU DIE-CAST+GLASS

LAMP:LUXEON 3020 35X0.45W/700mA,
INCL. LED POWER SUPPLY 700mA-DC
AC 100-240V/50-60Hz. ☺

AVAILABLE COLOR:WHI, BLK, GRY

IP65/ROHS/CE/▽





WE-1904 OUT-9W LED 2x4.6W




MATERIAL:ALU DIE-CAST+GLASS

LAMP:V6 ARRAY 2x4.6W/500mA,
2x471m/CRI80/3000K,2x3991m/CRI90/3000K,
AC 100-240V/50-60Hz ⊕
CRI 80/90,
LENS ANGLE: 30°.

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/♻️



WE-1924A OUT G2-12W LED 2x6W





MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 Array 2x 6.2W,
2x7031m/3000K/CRI 80 2x5501m/3000K/CRI 90
INCL LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz. ⊕
CRI 80/90,
REFLECTOR ANGLE: 80°.

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/♻️




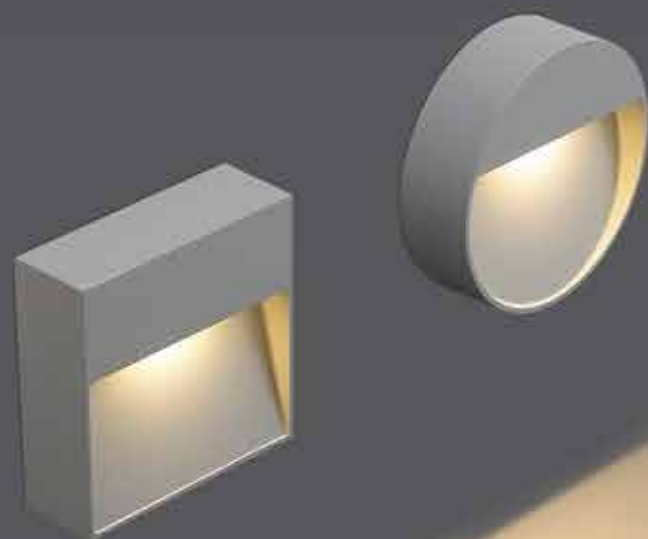

EYES LED 1x3W



MATERIAL:ALU DIE-CAST+GLASS
 LAMP:BRIDGELUX V6 Array 1x 3.2W
 348lm/3000K/CRI 80 292lm/3000K/CRI 90
 INCL. LED POWER SUPPLY 350mA-DC
 AC 100-240V/50-60Hz. ⊕
 CRI 85/90.




AVAILABLE COLOR:
 Sand Grey
 Sand Black
 Sand White

IP65/ROHS/CE/∇

EYE LED 1x3W



MATERIAL:ALU DIE-CAST+GLASS
 LAMP:BRIDGELUX V6 Array 1x 3.2W
 348lm/3000K/CRI 80 292lm/3000K/CRI 90
 INCL. LED POWER SUPPLY 350mA-DC
 AC 100-240V/50-60Hz. ⊕
 CRI 85/90.



AVAILABLE COLOR:
 Sand Grey
 Sand Black
 Sand White


IP65/ROHS/CE/∇



PILLAR LED 1x3W



MATERIAL:ALU DIE-CAST+GLASS
 LAMP:CREE XB-D, 1x3x1W ⊕
 300lm/CRI80/3000K
 INCL. LED POWER SUPPLY 350mA-DC
 AC 100-240V/50-60Hz. CRI 80.
 LENS ANGLE: 14°, 25°, 38°




AVAILABLE COLOR:
 Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/∇

PILLAR L LED 2x3W



MATERIAL:ALU DIE-CAST+GLASS
 LAMP:CREE XB-D, 2x3x1W ⊕
 2x300lm/CRI80/3000K
 INCL. LED POWER SUPPLY 350mA-DC
 AC 100-240V/50-60Hz. CRI 80.
 LENS ANGLE: 14°, 25°, 38°



AVAILABLE COLOR:
 Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/∇

WALL
SURFACE


WALL
SURFACE



DEFECT-9W LED 1x9W



MATERIAL:ALU DIE-CAST+GLASS
LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz
RI 80/90.




AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/

NO DEFECT-9W LED 1x9W



MATERIAL:ALU DIE-CAST+GLASS
LAMP:BRIDGELUX V8 Array 1x 9.2W
945lm/3000K/CRI 80 739lm/3000K/CRI 90
INCL. LED POWER SUPPLY 500mA-DC
AC 100-240V/50-60Hz
CRI 80/90.




AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/

LANCE OK LED 1x10W




MATERIAL:ALU DIE-CAST+GLASS
LAMP:OSLON Square EC 5x2W/700mA,
1120lm/CRI80,870lm/CRI90,
INCL. LED POWER SUPPLY 700mA-DC
AC 220-240V/50-60Hz
REFLECTOR ANGLE:32°, 46°.CRI 80/90.



AVAILABLE COLOR:WHI, BLK, GRY

IP65/ROHS/CE/

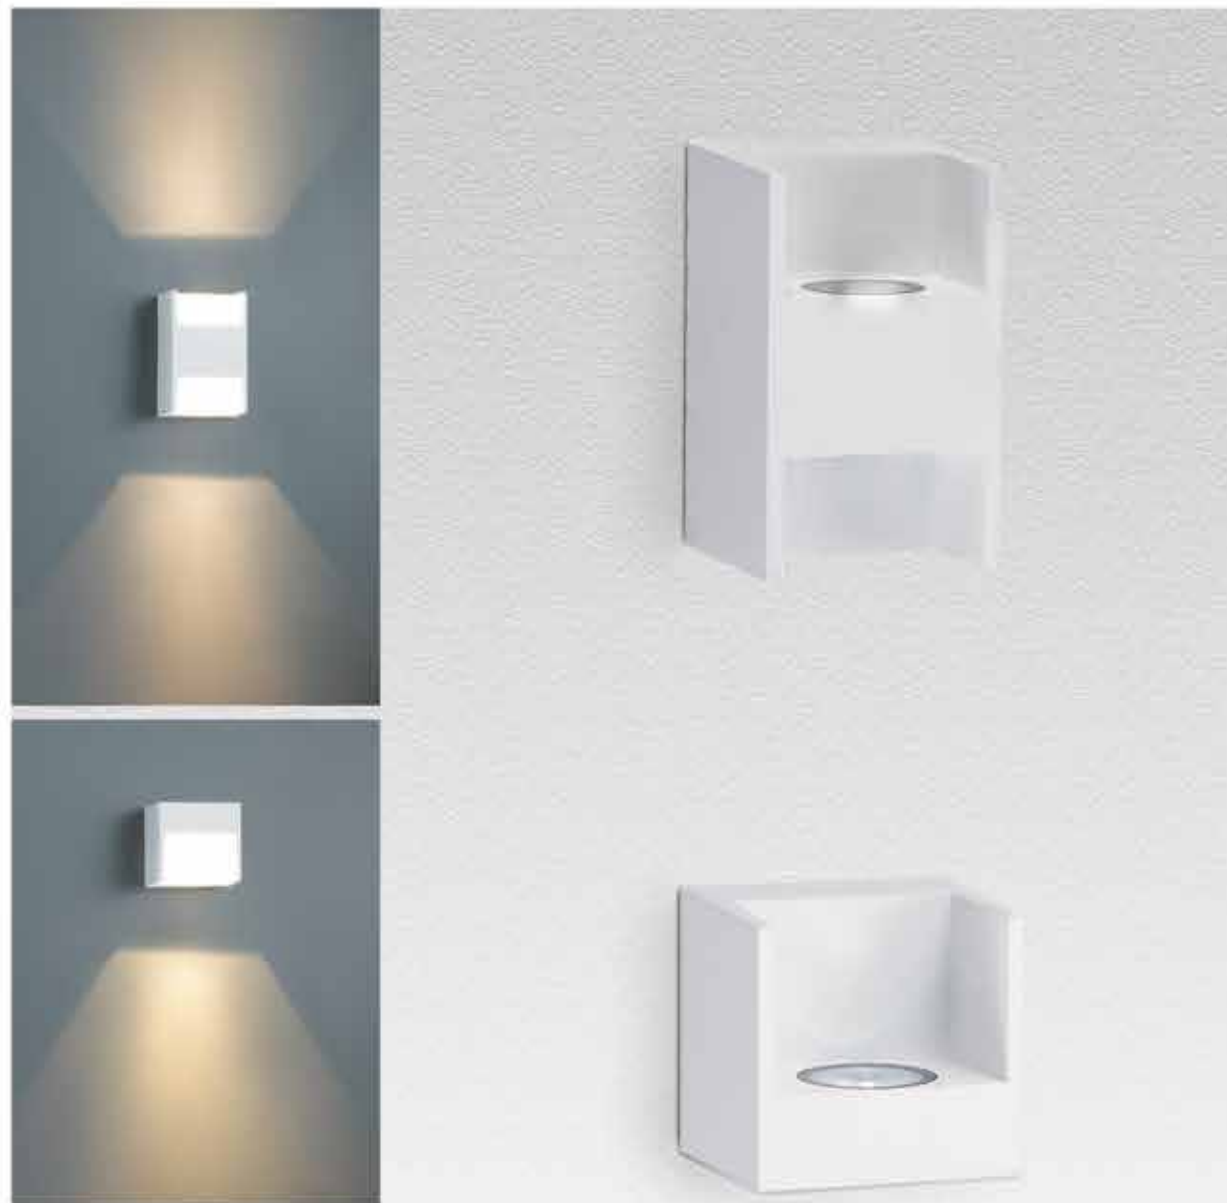

WE-1910 LED 1x3W




MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V6 Array 1x 3.2W
348lm/3000K/CRI 80 292lm/3000K/CRI 90
INCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP54/ROHS/CE/∇



WE-1911 LED 2x3W





MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V6 Array 2x 3.2W
2x348lm/3000K/CRI 80 2x292lm/3000K/CRI 90
INCL.LED POWER SUPPLY 350mA-DC
LENS ANGLE:30°.CRI 80/90.

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP54/ROHS/CE/∇

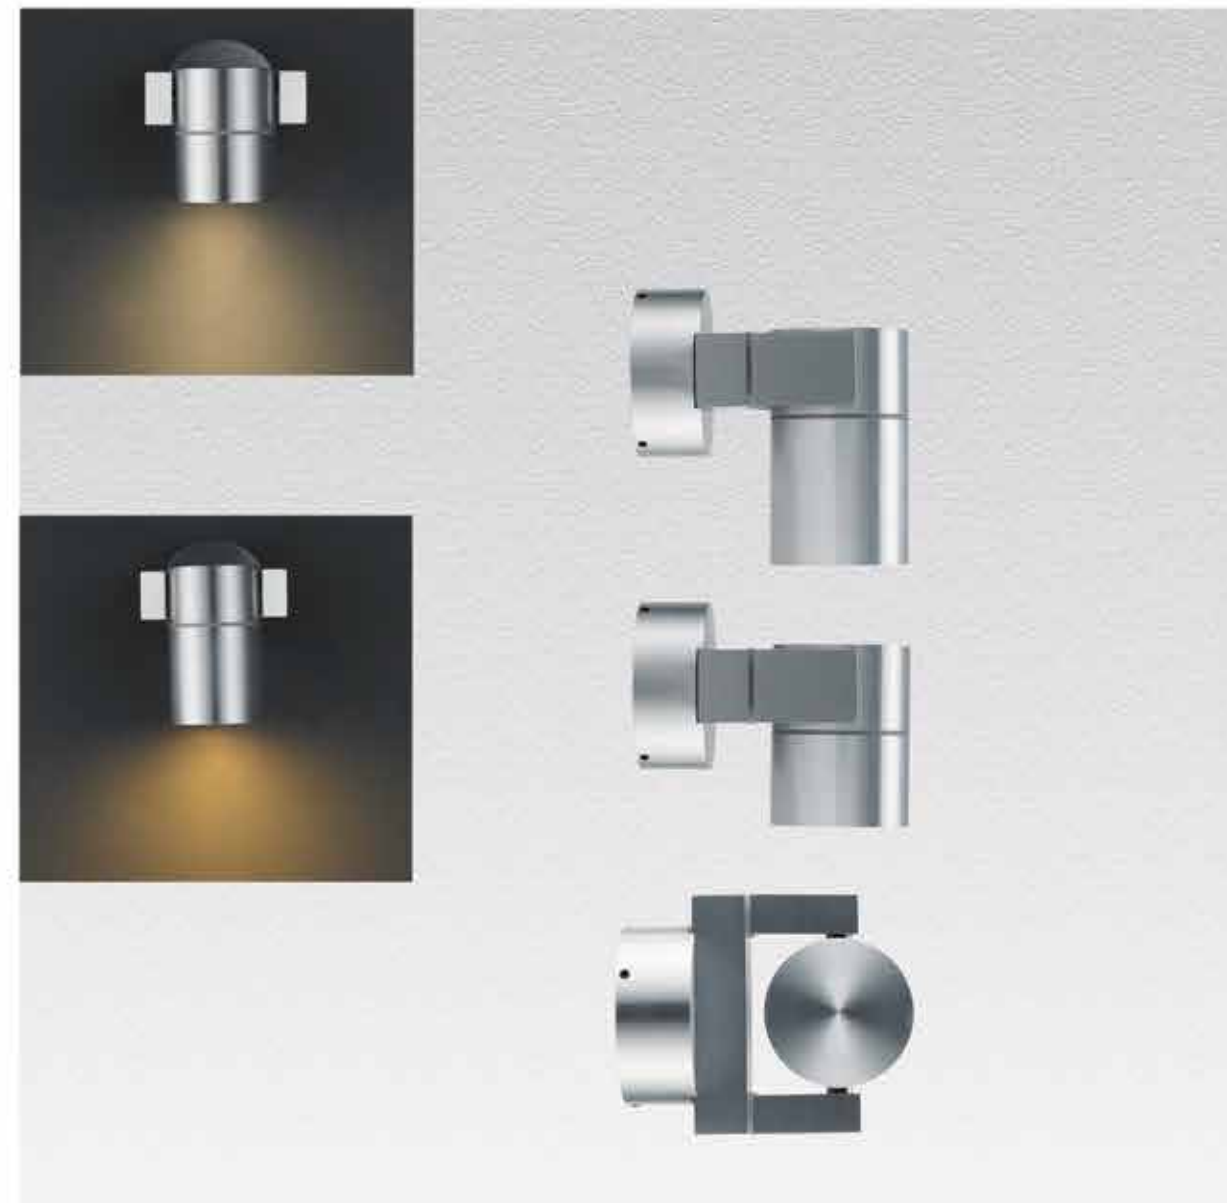

WL-1824 GU10 1x35W




MATERIAL:ALUMINUM+GLASS

LAMP:1XGU10 MAX.35W
Gu10 220-240V/50-60Hz

AVAILABLE COLOR:
Alu Brush
Sand Black
Sand White
Sand Grey

IP54/ROHS/CE/∇



WE-1824 LED 1x5W




MATERIAL:ALUMINUM+GLASS

LAMP:V6 ARRAY 1x4.6W/500mA,
471m/CRI80/3000K,399lm/CRI90/3000K,
AC 100-240V/50-60Hz
CRI 80/90.
LENS ANGLE: 30°.

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/∇





WE-1893 LED 1x5W




MATERIAL:ALU DIE-CAST+ALU+GLASS

LAMP:BRIDGELUX V6 ARRAY 1x4.6W/500mA, 471lm/CRI80/3000K,399lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC AC 100-240V/50-60Hz.⊕ CRI 80/90.

AVAILABLE COLOR:
Sand Grey
Sand Black
Sand White

IP65/ROHS/CE/▽



WE-1893-1 LED 2x5W




MATERIAL:ALU DIE-CAST+ALU+GLASS

LAMP:BRIDGELUX V6 ARRAY 2x4.6W/500mA, 2x471lm/CRI80/3000K,2x399lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC AC 100-240V/50-60Hz.⊕ CRI 80/90.

AVAILABLE COLOR:
Sand Grey
Sand Black
Sand White

IP65/ROHS/CE/▽



WE-1894 LED 1x5W




MATERIAL:ALU DIE-CAST+ALU+PMMA

LAMP:BRIDGELUX V6 ARRAY 1x4.6W/500mA, 471lm/CRI80/3000K,399lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC AC 100-240V/50-60Hz.⊕ CRI 80/90.

AVAILABLE COLOR:
Sand Grey
Sand Black
Sand White

IP65/ROHS/CE/▽



WE-1894-1 LED 2x5W




MATERIAL:ALU DIE-CAST+ALU+PMMA

LAMP:BRIDGELUX V6 ARRAY 2x4.6W/500mA, 2x471lm/CRI80/3000K,2x399lm/CRI90/3000K, INCL. LED POWER SUPPLY 500mA-DC AC 100-240V/50-60Hz.⊕ CRI 80/90.

AVAILABLE COLOR:
Sand Grey
Sand Black
Sand White

IP65/ROHS/CE/▽






WE-1915-3 LED 1x5W

MATERIAL:ALUMINUM+GLASS

LAMP:OSLON Square, 1x3x1.5W
510lm/CRI80/3000K, 440lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC100-240V/50-60Hz
LENS ANGLE:12°, 30°, 40°.CRI 80.

AVAILABLE COLOR:
Alu Grey, Sand Black, Sand White

IP65/ROHS/CE/▽




WE-1915-6 LED 1x9W

MATERIAL:ALUMINUM+GLASS

LAMP:OSLON Square, 1x6x1.5W
1010lm/CRI80/3000K, 870lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC100-240V/50-60Hz
LENS ANGLE:12°, 30°, 40°.CRI 80.

AVAILABLE COLOR:
Alu Grey, Sand Black, Sand White

IP65/ROHS/CE/▽




WE-1915-9 LED 1x14W

MATERIAL:ALUMINUM+GLASS

LAMP:OSLON Square, 1x9x1.5W
1510lm/CRI80/3000K, 1300lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC100-240V/50-60Hz
LENS ANGLE:12°, 30°, 40°.CRI 80.

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/▽




WE-1916-3 LED 1x5W

MATERIAL:ALUMINUM+GLASS

LAMP:OSLON Square, 1x3x1.5W
510lm/CRI80/3000K, 440lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC100-240V/50-60Hz
LENS ANGLE:12°, 30°, 40°.CRI 80.

AVAILABLE COLOR:
Alu Grey, Sand Black, Sand White

IP65/ROHS/CE/▽




WE-1916-6 LED 1x9W

MATERIAL:ALUMINUM+GLASS

LAMP:OSLON Square, 1x6x1.5W
1010lm/CRI80/3000K, 870lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC100-240V/50-60Hz
LENS ANGLE:12°, 30°, 40°.CRI 80.

AVAILABLE COLOR:
Alu Grey, Sand Black, Sand White

IP65/ROHS/CE/▽




WE-1916-9 LED 1x14W

MATERIAL:ALUMINUM+GLASS

LAMP:OSLON Square, 1x9x1.5W
1510lm/CRI80/3000K, 1300lm/CRI90/3000K,
INCL. LED POWER SUPPLY 500mA-DC
AC100-240V/50-60Hz
LENS ANGLE:12°, 30°, 40°.CRI 80.

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/▽





W1818 & W1819 series wall lamp is made by pure aluminum. It has traditional appearance and mature structure. It has been recognized by all customers. It is IP65 and it has three different length for choice. The sales of this series wall lamp has been keeping a steady increasing.

WL-1818 GU0 1x35W




MATERIAL:ALUMINUM+GLASS

LAMP:1xGU10 MAX.35W
Gu10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White
Alu Brush

IP65/ROHS/CE/



WL-1818-06 GU0 2x35W




MATERIAL:ALUMINUM+GLASS

LAMP:2xGU10 MAX.35W
Gu10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White
Alu Brush

IP65/ROHS/CE/



WL-1818-10 GU0 2x35W




MATERIAL:ALUMINUM+GLASS

LAMP:2xGU10 MAX.35W
Gu10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White
Alu Brush

IP65/ROHS/CE/



WL-1818 GU0 1x35W




MATERIAL:ALUMINUM+GLASS

LAMP:1xGU10 MAX.35W
Gu10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White
Alu Brush

IP65/ROHS/CE/



WL-1818-06 GU0 2x35W




MATERIAL:ALUMINUM+GLASS

LAMP:2xGU10 MAX.35W
Gu10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White
Alu Brush

IP65/ROHS/CE/



WL-1818-10 GU0 2x35W




MATERIAL:ALUMINUM+GLASS

LAMP:2xGU10 MAX.35W
Gu10 220-240V/50-60Hz

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White
Alu Brush

IP65/ROHS/CE/






WL-1857 G9 1x40W

MATERIAL:ALUMINUM+GLASS

LAMP:1xG9 MAX.40W
G9 220-240V/50-60Hz

AVAILABLE COLOR:
Alu Brush, Sand Black, Sand White, Sand Grey

IP65/ROHS/CE/





LOTTA LED 2x4W

MATERIAL:ALUMINUM+GLASS

LAMP:LUXEON 3020 2D.2x5x0.87W
490lm/CRI80/3000K, 430lm/CRI90/3000K
INCL.LED POWER SUPPLY 700mA-DC
AC 100-240V/50-60Hz.CRI 80.

AVAILABLE COLOR:Sand Grey, Sand Black
Sand White, Alu Brush

IP54/ROHS/CE/

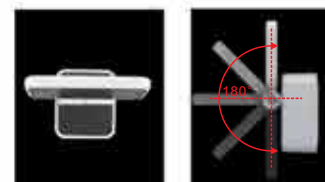


WE-1899 LED1x7W

MATERIAL:ALU DIE-CAST+GLASS

LAMP:EVERLIGHT SMD.18x0.4W
INCL. LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz .CRI 80.

AVAILABLE COLOR:
Sand Grey, Sand Black, Sand White

IP54/ROHS/CE/



EXTERIOR

FLOOR SURFACE



LAW TF P238



LAW LF P238



1924 OUT F P239



DEFECT F P240



NO DEFECT F P240



OE-110 P241



OE-120 P243



OE-122 P245

FLOOR SURFACE



LAW TF LED 2x6W




MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 Array 2x 6.2W
2x703lm/3000K/CRI 80 2x550lm/3000K/CRI 90
INCL.LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz. ⊕
CRI 80/90.

AVAILABLE COLOR:
Sand Grey
Sand Black
Sand White

IP65/ROHS/CE/▽



400mm LAW TF 7W-16
750mm LAW TF 7W-30
1000mm LAW TF 7W-40

LAW LF LED 1x6W




MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 Array 1x 6.2W
703lm/3000K/CRI 80 550lm/3000K/CRI 90
INCL.LED POWER SUPPLY 350mA-DC
AC 100-240V/50-60Hz. ⊕
CRI 80/90.

AVAILABLE COLOR:
Sand Grey
Sand Black
Sand White

IP65/ROHS/CE/▽



400mm LAW LF 7W-16
750mm LAW LF 7W-30
1000mm LAW LF 7W-40




1924 OUT F 9W LED 1x9W

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 Array 1x 9.2W
 945lm/3000K/CRI 80 739lm/3000K/CRI 90
 INCL. LED POWER SUPPLY 500mA-DC
 AC 100-240V/50-60Hz .
 CRI 80/90.

AVAILABLE COLOR:Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/

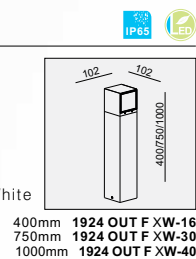

400mm **1924 OUT F XW-16**
 750mm **1924 OUT F XW-30**
 1000mm **1924 OUT F XW-40**


NO DEFECT F 9W LED 1x9W

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 Array 1x 9.2W
 945lm/3000K/CRI 80 739lm/3000K/CRI 90
 INCL. LED POWER SUPPLY 500mA-DC
 AC 100-240V/50-60Hz .
 CRI 80/90.

AVAILABLE COLOR:Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/

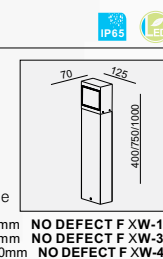

400mm **NO DEFECT F XW-16**
 750mm **NO DEFECT F XW-30**
 1000mm **NO DEFECT F XW-40**


DEFECT F 9W LED 1x9W

MATERIAL:ALU DIE-CAST+GLASS

LAMP:BRIDGELUX V8 Array 1x 9.2W
 945lm/3000K/CRI 80 739lm/3000K/CRI 90
 INCL. LED POWER SUPPLY 500mA-DC
 AC 100-240V/50-60Hz .
 CRI 80/90.

AVAILABLE COLOR:Sand Grey, Sand Black, Sand White

IP65/ROHS/CE/

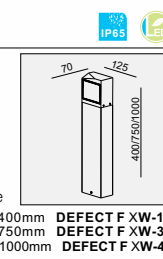

400mm **DEFECT F XW-16**
 750mm **DEFECT F XW-30**
 1000mm **DEFECT F XW-40**




OE-110 SERIES

MATERIAL: ALUMINUM+GLASS
 LAMP: OSLO Square. LENS ANGLE: 12°, 30°, 40°. CRI 80.
 AVAILABLE COLOR: Alu Grey, Sand Black, Sand White IP66/ROHS/CE



MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP	SIZE(mm) WxØxH
OE-110-3	1x5W	500mA NO DIM	510	440	OSLO Square	80x60x360
OE-110-6	1x9W	500mA NO DIM	1010	870	OSLO Square	105x80x395
OE-110-9	1x14W	500mA NO DIM	1510	1300	OSLO Square	122x98x420
OE-110-15	1x23W	500mA NO DIM	2500	2160	OSLO Square	112x112x430

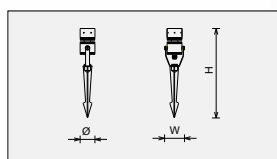

OE-110-3

OE-110-6

OE-110-9

OE-110-15




OE-120 SERIES

MATERIAL: ALUMINUM+GLASS
 LAMP: OSLO Square. LENS ANGLE: 12°, 30°, 40°. CRI 80.
 AVAILABLE COLOR: Alu Grey, Sand Black, Sand White IP66/ROHS/CE



MODEL NO.	POWER (W)	DRIVER(INCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP	SIZE(mm) WxØxH
OE-120-3	1x5W	500mA NO DIM	510	440	OSLO Square	80x60x165
OE-120-6	1x9W	500mA NO DIM	1010	870	OSLO Square	105x80x185
OE-120-9	1x14W	500mA NO DIM	1510	1300	OSLO Square	122x98x212
OE-120-15	1x23W	500mA NO DIM	2500	2160	OSLO Square	112x112x232

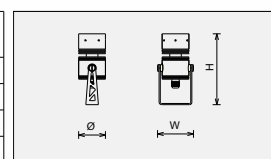

OE-120-3

OE-120-6

OE-120-9

OE-120-15




FLOOR SURFACE



OE-122 SERIES

MATERIAL: ALUMINUM+GLASS
 LAMP: OSLO Square. LENS ANGLE: 12°, 30°, 40°. CRI 80.
 AVAILABLE COLOR: Alu Grey, Sand Black, Sand White IP66/ROHS/CE

MODEL NO.	POWER (W)	DRIVER(EXCL.)	LUMINOUS FLUX(lm) 3000K/CRI80	LUMINOUS FLUX(lm) 3000K/CRI90	LAMP	SIZE(mm) WxLxH
OE-122-3	1x5W	500mA NO DIM	510	440	OSLO Square	70x70x127
OE-122-6	1x9W	500mA NO DIM	1010	870	OSLO Square	90x88x148
OE-122-9	1x14W	500mA NO DIM	1510	1300	OSLO Square	96x102x170
OE-122-15	1x23W	500mA NO DIM	2500	2160	OSLO Square	110x123x200

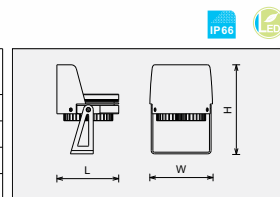

OE-122-3

OE-122-6

OE-122-9

OE-122-15



FOCUS COLD



HORN



COLD HIDE




TOP



SKY LINE

COLD

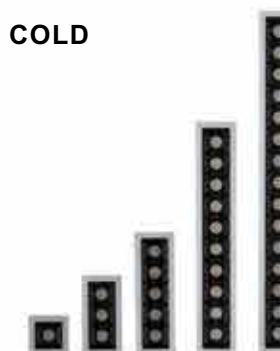

WHAT'S NEW?

Spectrum Leads

10 Anson Road, #05 - 17 International Plaza, Singapore 079903
info@spectrumluminaire.sg
www.spectrumluminaire.sg
+65 9168 1272